

30" H x 60" W x 30" D
2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FLOOR MOUNT



FILE NUMBER: E507642

- ENCLOSURE MATERIAL**

☐ POWDER COATED STEEL (CS)

☐ POWDER COATED ALUMINUM (AL)
- POWDERCOAT COLOR**

☐ STANDARD WHITE

☐ LIGHT GRAY ANSI 70

☐ DARK GRAY ANSI 61

☐ STANDARD BLACK

☐ CUSTOM _____
- FLOOR KIT**

☐ 6" HT. (STANDARD)

☐ 8" HT.


☐ 10" HT.

☐ 12" HT.

☐ CUSTOM _____
- ENCLOSURE CONSTRUCTION**

☐ 14 GA THK.

☐ 12 GA THK.
- AIR CONDITIONER**
SEE (PAGE 5)

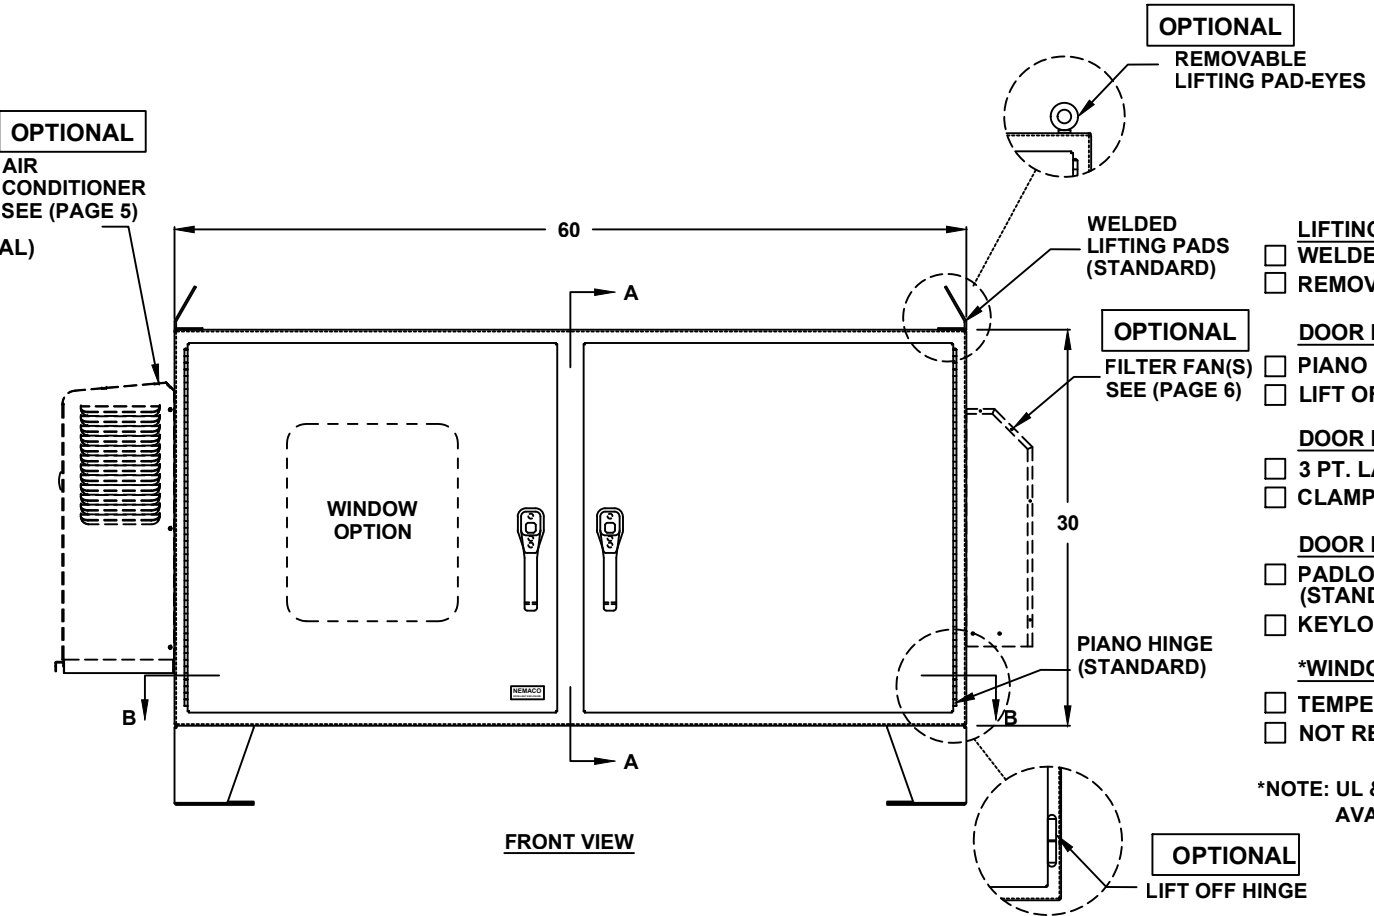

- LIFTING EYE**

☐ WELDED PADS (STANDARD)

☐ REMOVABLE PADEYES
- DOOR HINGE**

☐ PIANO HINGE (STANDARD)

☐ LIFT OFF HINGE
- DOOR LATCH OPTIONS**

☐ 3 PT. LATCH (STANDARD)

☐ CLAMP SCREW WITH HASP
- DOOR HANDLE**

☐ PADLOCK PROVISION (STANDARD)

☐ KEYLOCK (OPTION)
- *WINDOW OPTIONS**

☐ TEMPERED GLASS

☐ NOT REQUIRED

*NOTE: UL & NON-UL OPTIONS AVAILABLE

ALL DIMENSIONS ARE ESTIMATED IN INCHES
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME

APPROVED (PRINTED NAME)

SIGNATURE

DATE

N4-306030-FDDECXX (X1)

30" H x 60" W x 30" D 2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FLOOR MOUNT



FILE NUMBER: E507642

DOOR OPTIONS

- ☐ DOOR SWITCH
☐ PRINT POCKET

DOOR SWITCH OPTIONS

- ☐ 10A (STANDARD)
☐ 16A

CENTER POST


- ☐ FIXED (STANDARD)
☐ REMOVABLE

BACK PANEL

- ☐ 2 BACK PANELS FIXED POST
☐ 1 SINGLE BACK PANEL
(REMOVEABLE CENTER POST
REQUIRED)

BACK PANEL MATERIALS

- ☐ COATED STEEL (IP3030-CS)
☐ COATED ALUMINUM (IP3030-AL)
☐ 304 STAINLESS STEEL (IP3030-S4)
☐ 316 STAINLESS STEEL (IP3030-S6)

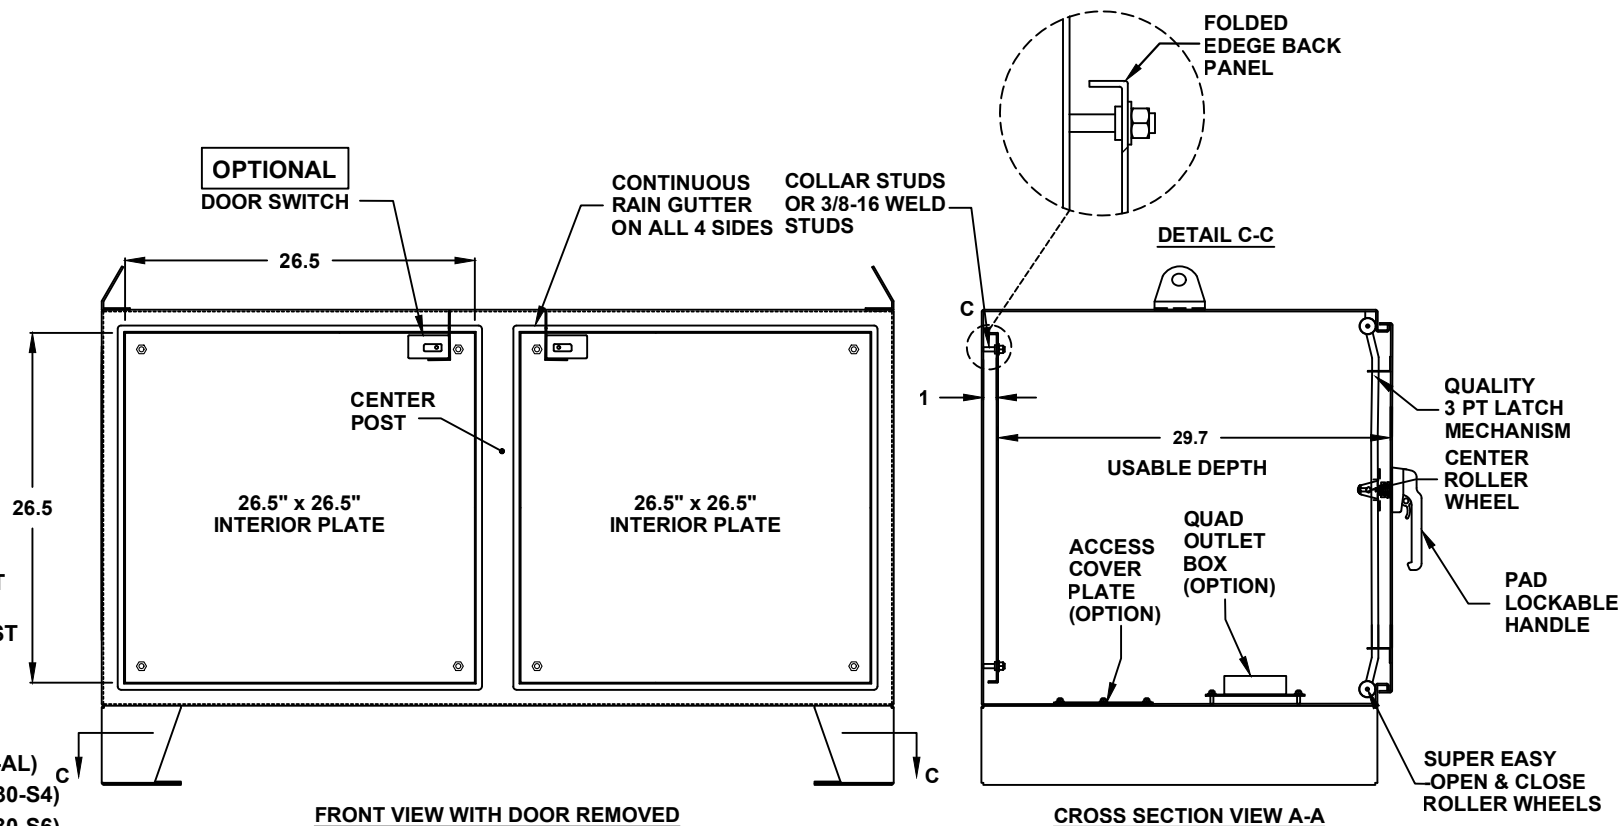

N4-306030-FDDECXX (X1)

30" H x 60" W x 30" D
2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FLOOR MOUNT



FILE NUMBER: E507642

BASE ACCESS COVER PLATE
(OPTION)


- ☐ 8x8 PLATE (6x6 CUT-OUT)
- ☐ 8x16 PLATE (6x14 CUT-OUT)
- ☐ 12x12 PLATE (10x10 CUT-OUT)
- ☐ 16x16 PLATE (14x14 CUT-OUT)
- ☐ CUSTOM SIZE _____
- ☐ NOT REQUIRED

ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
- ☐ POWDER COATED ALUMINUM
- ☐ STAINLESS STEEL, 304

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION
- ☐ PIPE FITTING HUB
- ☐ CABLE GLAND

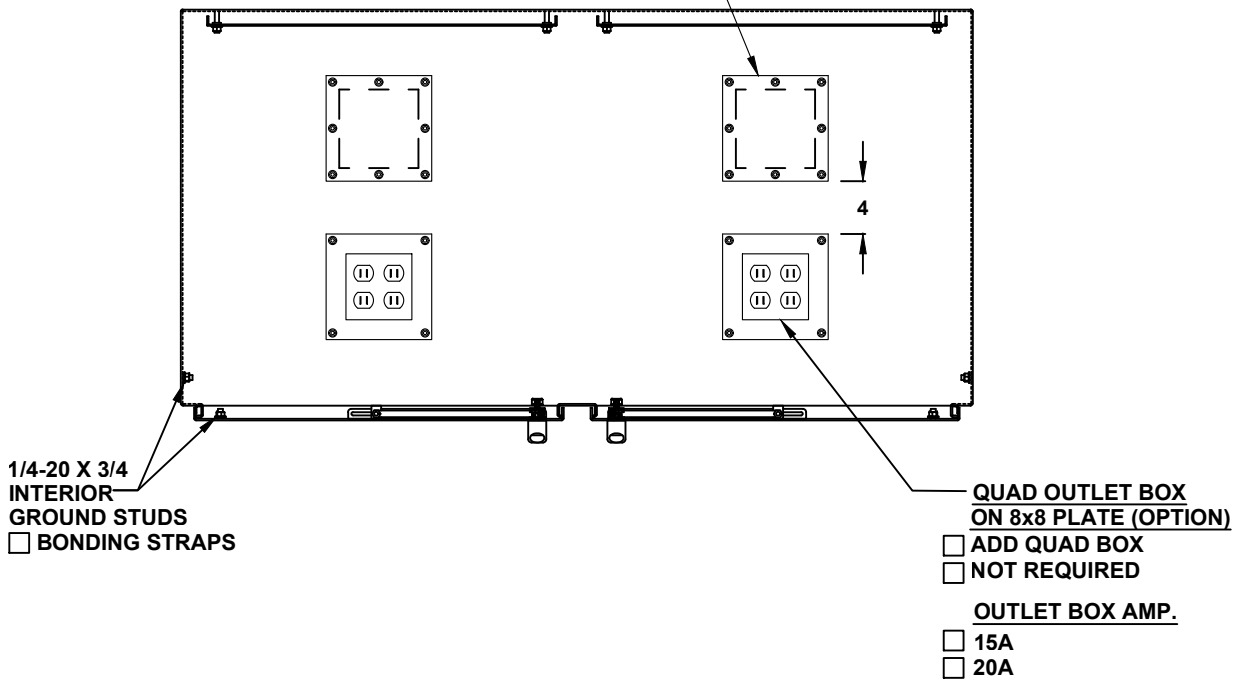

TOP CROSS SECTION VIEW B-B


30" H x 60" W x 30" D
2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FLOOR MOUNT




FILE NUMBER: E507642

DOOR STOPPER
☐ INSTALL DOOR STOPPER
☐ NOT REQUIRED

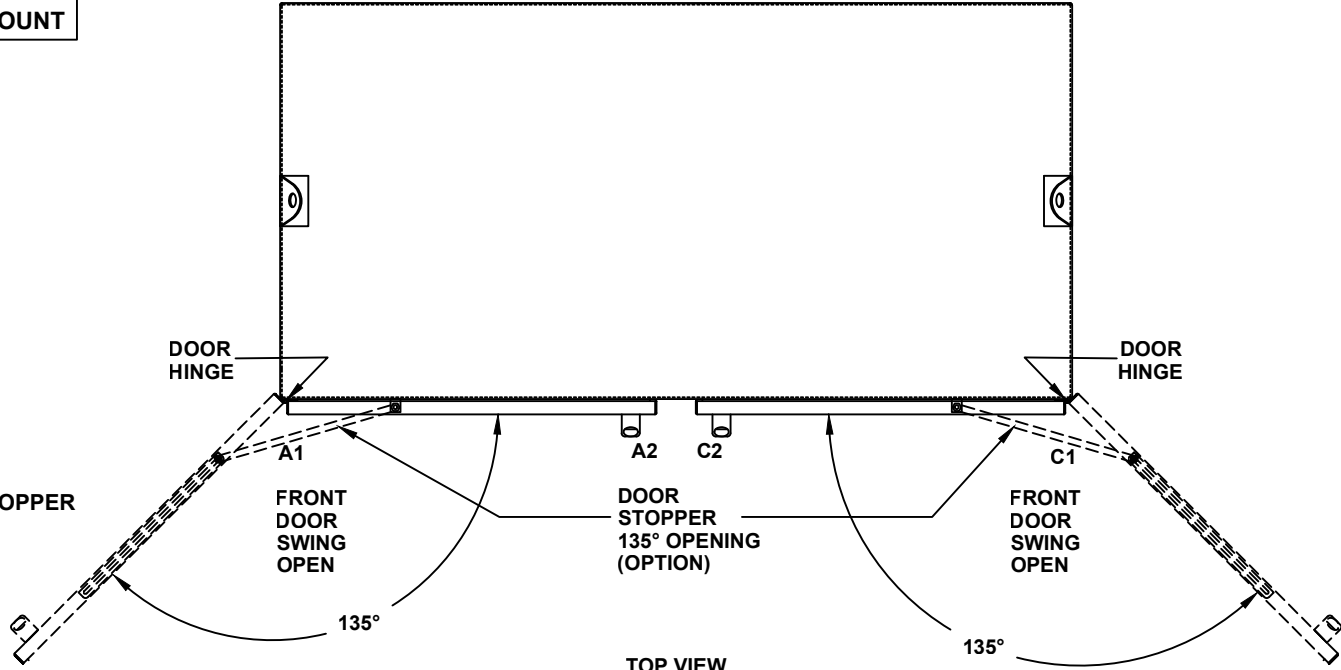

TOP VIEW

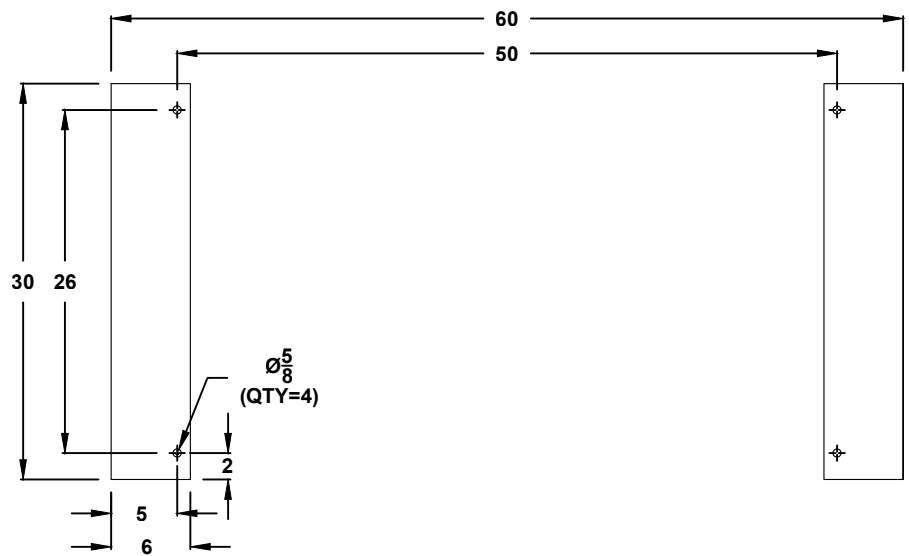

CROSS SECTION VIEW C-C
MOUNTING HOLES

N4-306030-FDDECXX (X1)

30" H x 60" W x 30" D 2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FLOOR MOUNT



FILE NUMBER: E507642

A/C UNIT AND SERVICE HATCH DOOR (OPTION)

AIR CONDITIONER

- ☐ 1000 BTU
- ☐ 1500 BTU
- ☐ 2000 BTU
- ☐ 3000 BTU
- ☐ 4000 BTU
- ☐ 5000 BTU
- ☐ 6000 BTU
- ☐ 8000 BTU
- ☐ SPECIFY _____
- ☐ NOT REQUIRED

A/C VOLTAGE/ HZ

- ☐ 115 VOLTS
- ☐ 230 VOLTS
- ☐ 480 VOLTS
- ☐ 60 HZ
- ☐ 50 HZ
- ☐ 48 VDC (CS011 A/C ONLY)

A/C INTEGRATED HEATER


- ☐ 350 WATTS (CS011 A/C ONLY)
- ☐ 500 WATTS
- ☐ 1000 WATTS
- ☐ EXTERNAL HEATER

ADDITIONAL A/C OPTIONS

- ☐ CORROSION PROTECTION PACKAGE
- ☐ DRY CONTACT (OUTPUT SIGNAL)
- ☐ 2" DEEP FILTERS
- ☐ PROXIMITY SWITCH (ON/OFF)

AIR CONDITIONER- SCADA

- ☐ MODBUS RTU 485 (2 WIRE)
REMOTE NETWORK
ETHERNET CONNECTION
- ☐ MODBUS GATEWAY
ADD-ON

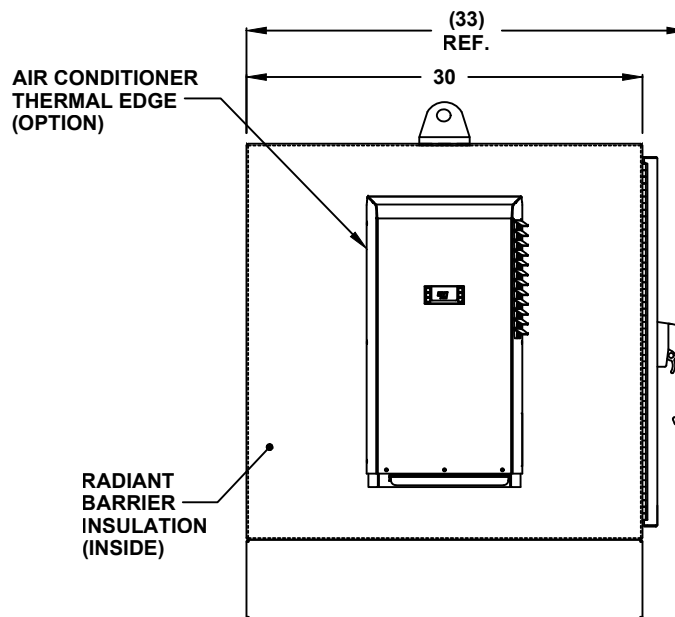

LEFT SIDE

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
- ☐ INTERIOR TEMP. _____ °F
- ☐ HEAT LOAD (WATTS) _____
- ☐ SUN / SHADE _____

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
- ☐ 3/4 RADIANT BARRIER
- ☐ 1 RADIANT BARRIER
- ☐ NOT REQUIRED

N4-306030-FDDECXX (X1)

30" H x 60" W x 30" D 2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FLOOR MOUNT



FILE NUMBER: E507642

FILTERED FAN SYSTEM (OPTION)

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
☐ INTERIOR TEMP. _____ °F
☐ HEAT LOAD (WATTS) _____
☐ SUN / SHADE _____

FAN SYSTEM

- ☐ PUSH-PULL SYSTEM (STANDARD)
☐ PUSH SYSTEM
☐ PULL SYSTEM
☐ NOT REQUIRED

FAN SERIES

- ☐ 60FL SERIES, 18" H (40-92 CFM)
☐ 180FL SERIES, 24"H (177-179 CFM)
☐ 225FL SERIES, 24"H (350 CFM)

FAN MATERIALS

- ☐ BAKED POWDER STEEL
☐ STAINLESS STEEL

FAN VOLTAGE/ HZ

- ☐ 115/60 (STANDARD)
☐ 230/60
☐ 12 VDC
☐ 24 VDC
☐ 48 VDC
☐ SPECIFY _____

ACCESSORIES AND OPTIONS


- ☐ REPLACEMENT FILTER

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

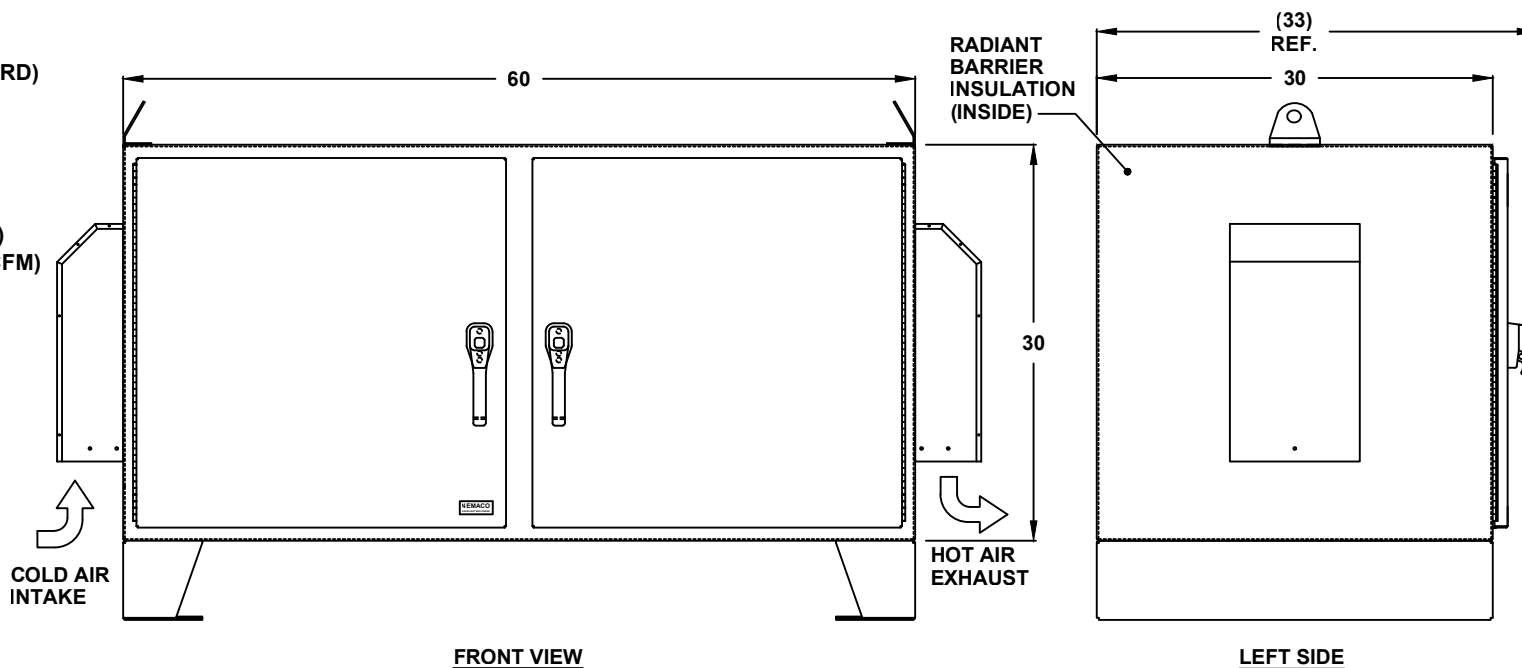

N4-306030-FDDECXX (X1)