

**NEMA 4/12 - ENCLOSURE
19" RACKMOUNT - 12U HEIGHT
FREE STANDING**

24" H x 24" W x 24" D 2 DOOR DESIGN



FILE NUMBER: E507642

ENCLOSURE MATERIAL

- ☐ POWDER COATED STEEL (CS)
☐ POWDER COATED ALUMINUM (AL)

POWDERCOAT COLOR

- ☐ WHITE
☐ LIGHT GRAY ANSI 70
☐ DARK GRAY ANSI 61 (STANDARD)
☐ BLACK
☐ CUSTOM _____

ENCLOSURE CONSTRUCTION

- ☐ 14 GA THK.
☐ 12 GA THK.


ENCLOSURE DOOR HINGE

- ☐ CONTINUOUS PIANO HINGE (STANDARD)
☐ REMOVABLE LIFT OFF HINGE

BASE EXTENSION

- ☐ 4" BASE EXTENSION
☐ 6" BASE EXTENSION
☐ 8" BASE EXTENSION
☐ 10" BASE EXTENSION
☐ 12" BASE EXTENSION
☐ NOT REQUIRED

AIR CONDITIONER (OPTION)
REF. TO PAGE 2

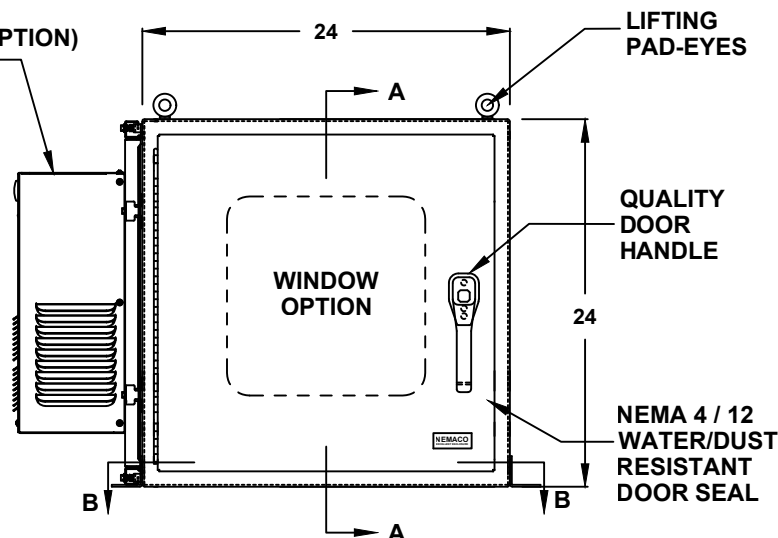

FRONT VIEW

LIFTING EYES

- ☐ WELDED PADEYES (STANDARD)
☐ REMOVABLE PADEYES

***WINDOW OPTIONS**

- ☐ TINTED WINDOW
☐ TEMPERED GLASS
☐ NOT REQUIRED

DOOR HANDLES

- ☐ PADLOCK PROVISION (STANDARD)
☐ KEYLOCK (OPTION)

ALL DIMENSIONS ARE ESTIMATED IN INCHES
AND MAY VARY DUE TO SELECTED OPTIONS.

*NOTE: UL & NON-UL OPTIONS
AVAILABLE

COMPANY NAME

APPROVED (PRINTED NAME)

SIGNATURE

DATE

24" H x 24" W x 24" D 2 DOOR DESIGN

AIR CONDITIONER

- ☐ 1000 BTU (NE/CS)
☐ 1500 BTU (NE)
☐ 2000 BTU (CS)
☐ SPECIFY _____
☐ NOT REQUIRED

A/C VOLTAGE/ HZ

- ☐ 115 VOLTS
☐ 230 VOLTS
☐ 480 VOLTS
☐ 60 HZ
☐ 50 HZ
☐ 48 VDC (CS011 A/C ONLY)

A/C INTEGRATED HEATER


- ☐ 350 WATTS (CS011 A/C ONLY)
☐ 500 WATTS
☐ 1000 WATTS
☐ EXTERNAL HEATER

ADDITIONAL A/C OPTIONS

- ☐ CORROSION PROTECTION PACKAGE
☐ DRY CONTACT (OUTPUT SIGNAL)
☐ 2" DEEP FILTERS
☐ PROXIMITY SWITCH (ON/OFF)

AIR CONDITIONER- SCADA

- ☐ MODBUS RTU 485 (2 WIRE)
 REMOTE NETWORK
 ETHERNET CONNECTION
☐ MODBUS GATEWAY
 ADD-ON

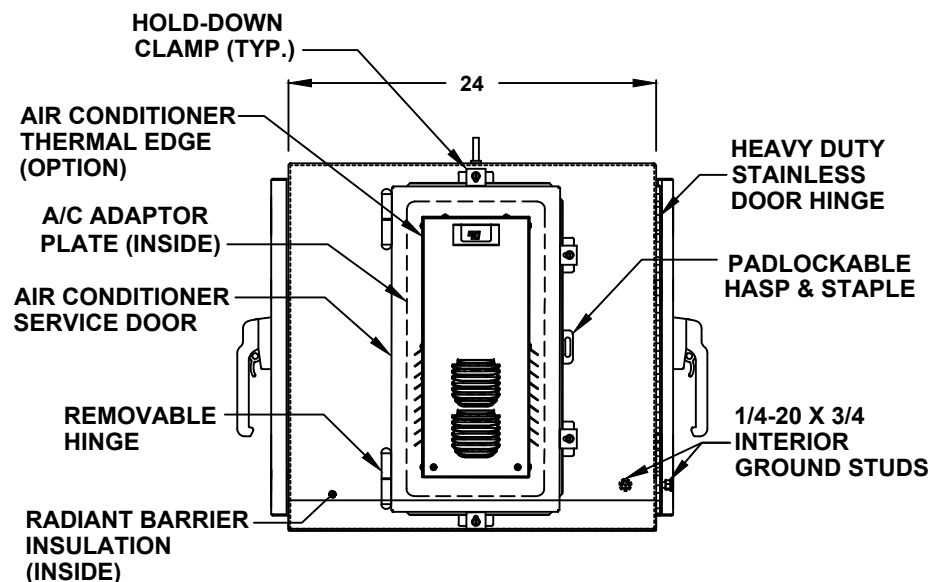

LEFT SIDE

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
☐ INTERIOR TEMP. _____ °F
☐ HEAT LOAD (WATTS) _____
☐ SUN / SHADE _____

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

A/C SERVICE DOOR

- ☐ INSTALL A/C SERVICE DOOR
☐ NOT REQUIRED

A/C SERVICE DOOR HINGE

- ☐ REMOVABLE HINGE
☐ CONTINUOUS HINGE

A/C ADAPTOR PLATE

- ☐ INSTALL A/C ADAPTOR PLATE
☐ NOT REQUIRED

24" H x 24" W x 24" D 2 DOOR DESIGN

RACK RAIL OPTIONS


- ☐ BLACK CLIP NUTS, #10-32, (100 EA.)
- ☐ #10/32 HIGH POINT SCREWS (100 EA.)
- ☐ M6 CAGE NUTS

ADJUSTABLE
SLIDING
TRACK

QUALITY
3 PT LATCH
MECHANISM

CONTINUOUS
RAIN GUTTER
ON ALL 4 SIDES


DOOR SWITCH
(OPTION)

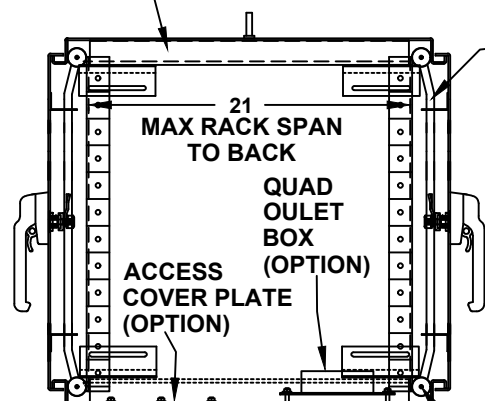

CROSS SECTION VIEW A-A

ADJUSTABLE
19" RACK RAILS
(OPTIONS)

SUPER EASY
-OPEN & CLOSE
ROLLER WHEELS

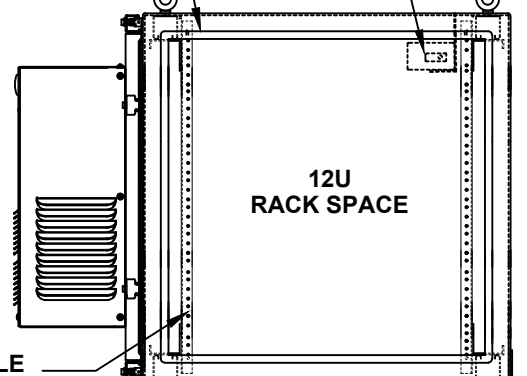

FRONT VIEW WITH DOOR REMOVED

OTHER OPTIONS

- ☐ 19" RACK COPPER BUSBAR
- ☐ VERTICAL RACK PDU

DOOR OPTIONS

- ☐ DOOR SWITCH
- ☐ PRINT POCKET

DOOR SWITCH OPTIONS

- ☐ 10A (STANDARD)
- ☐ 16A

RACK RAIL POST

- ☐ QTY 2 POST
- ☐ QTY 4 POST (REARDOOR REQUIRED)

RACK RAIL MATERIAL

- ☐ POWDER COATED STEEL (STANDARD)
- ☐ 304 STAINLESS STEEL

RACK RAIL MOUNTING HOLES

- ☐ #10-32 TAP (STANDARD)
- ☐ #1/4-20 TAP
- ☐ 3/8 SQUARE

RACK RAIL TYPE

- ☐ STANDARD GRADE
- ☐ HEAVY DUTY RAILS (OPTION)

RACK SHELVES (OPTION)

- ☐ STANDARD RACK SHELVES
- ☐ SLIDING RACK SHELVES
- ☐ RACK SHELF SUPPORT


RACK DRAWERS (OPTION)

- ☐ RACK DRAWERS
- ☐ LAPTOP DRAWERS

24" H x 24" W x 24" D 2 DOOR DESIGN

DOOR STOPPER

- ☐ INSTALL DOOR STOPPER
☐ NOT REQUIRED

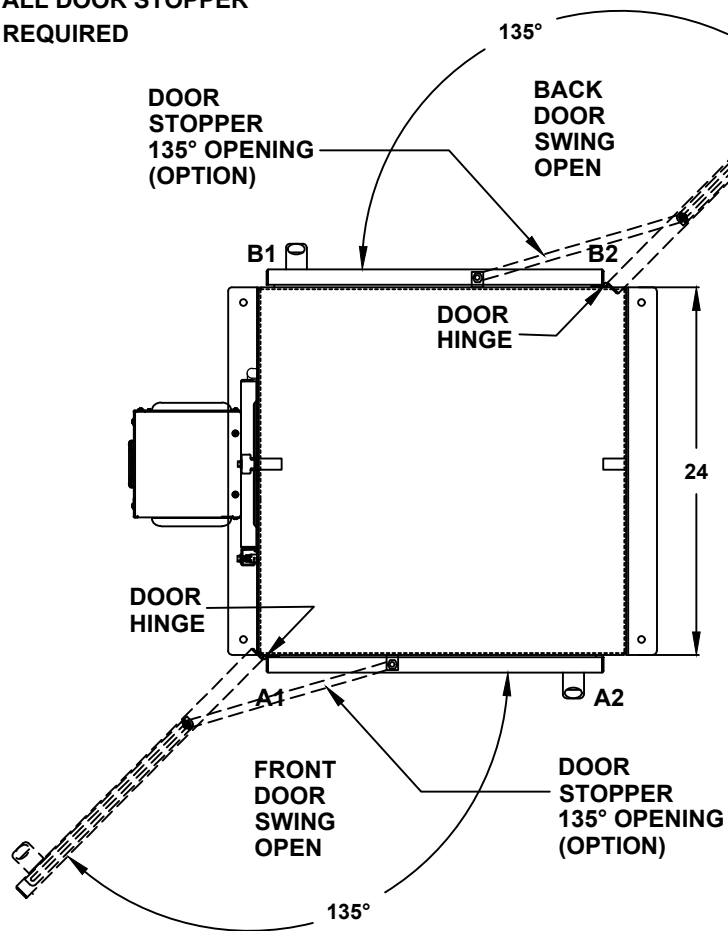


TOP VIEW

BASE ACCESS COVER PLATE (OPTION)

- ☐ 8x8 PLATE (6x6 CUT-OUT)
☐ 8x16 PLATE (6x14 CUT-OUT)
☐ 12x12 PLATE (10x10 CUT-OUT)
☐ 16x16 PLATE (14x14 CUT-OUT)

SIDE ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
☐ POWDER COATED ALUMINUM
☐ STAINLESS STEEL, 304

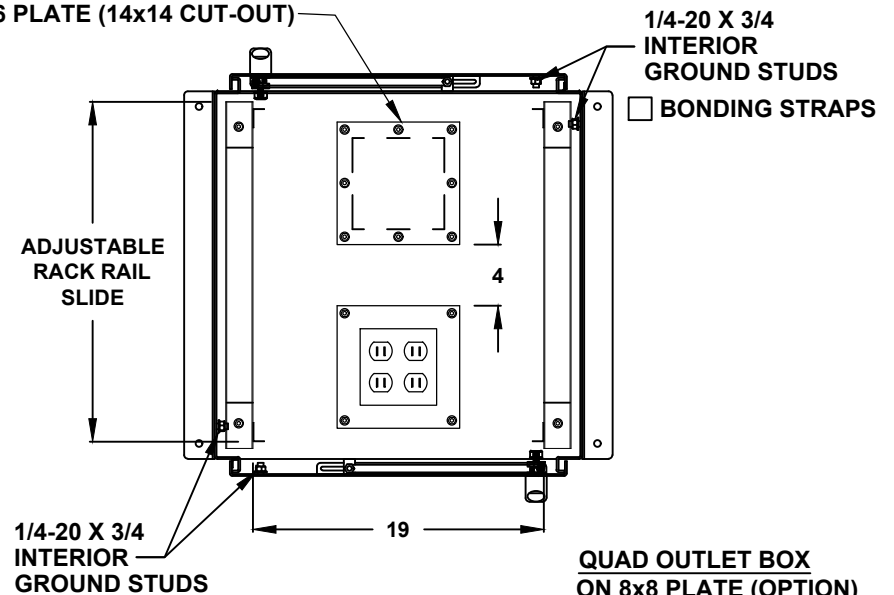

TOP CROSS SECTION VIEW B-B

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION
☐ PIPE FITTING HUB
☐ CABLE GLAND


QUAD OUTLET BOX ON 8x8 PLATE (OPTION)

- ☐ ADD QUAD BOX
☐ NOT REQUIRED


OUTLET BOX AMP.

- ☐ 15A
☐ 20A


24" H x 24" W x 24" D
2 DOOR DESIGN

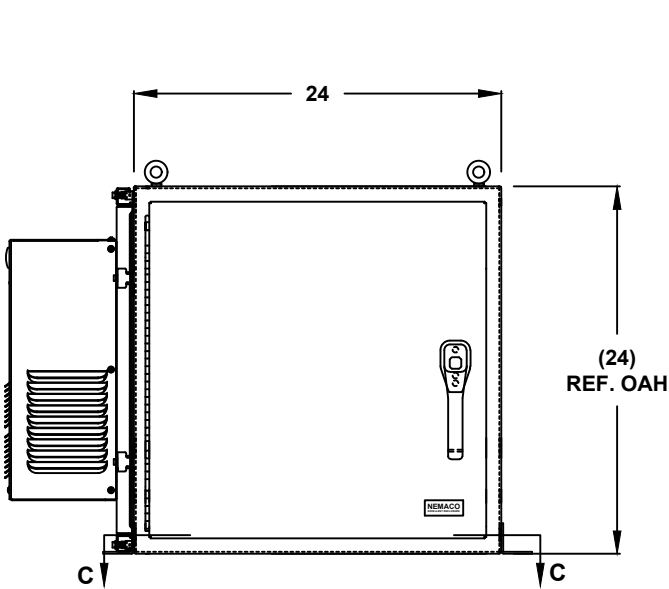

FRONT VIEW

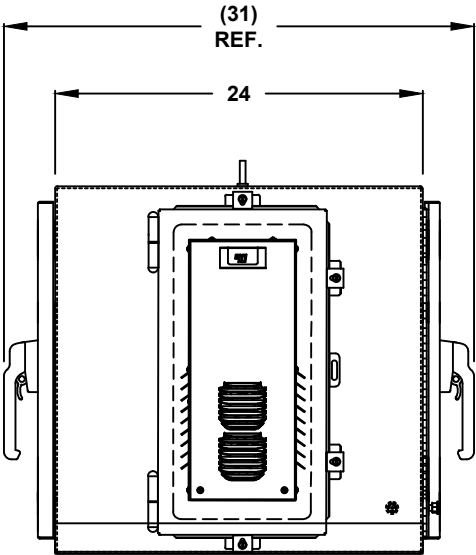

LEFT SIDE

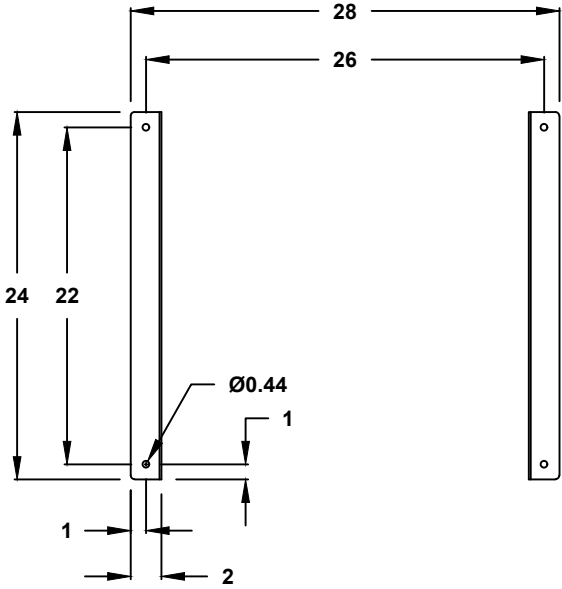

CROSS SECTION VIEW C-C
MOUNTING HOLES