

NEMA 4X - ENCLOSURE
19" RACKMOUNT - 15U HEIGHT
FREE STANDING

STAINLESS STEEL

30" H x 24" W x 20" D 1 DOOR DESIGN



FILE NUMBER: E507642


- ENCLOSURE MATERIAL**
- ☐ 304 STAINLESS STEEL (S4)
- ☐ 316 STAINLESS STEEL (S6)
- AIR CONDITIONER (OPTION)**
REF. TO PAGE 2

- CORROSION PROTECTION PACKAGE**
- ☐ EXTERIOR PASSIVATION (STANDARD)
- ☐ INTERIOR/EXTERIOR PASSIVATION (OPTION)
- ☐ NOT REQUIRED (ON REQUEST ONLY)

- POWDERCOAT COLOR**
- ☐ WHITE
- ☐ LIGHT GRAY ANSI 70
- ☐ DARK GRAY ANSI 61
- ☐ BLACK
- ☐ CUSTOM _____

- ENCLOSURE CONSTRUCTION**
- ☐ 14 GA THK.
- ☐ 12 GA THK.

- ENCLOSURE DOOR HINGE**
- ☐ CONTINUOUS PIANO HINGE (STANDARD)
- ☐ REMOVABLE LIFT OFF HINGE

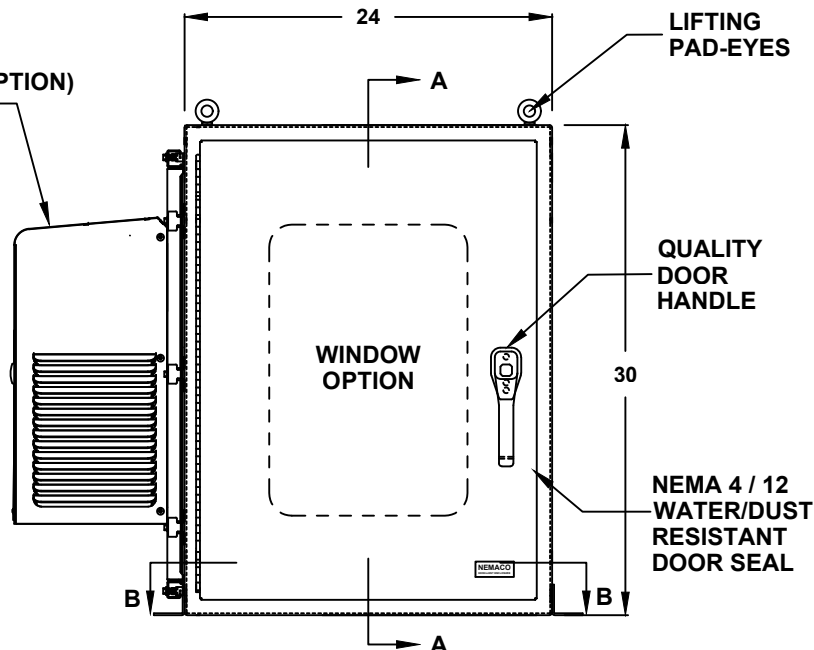

FRONT VIEW

- LIFTING EYES**
- ☐ WELDED PADEYES (STANDARD)
- ☐ REMOVABLE PADEYES

- *WINDOW OPTIONS**
- ☐ TINTED WINDOW
- ☐ TEMPERED GLASS
- ☐ NOT REQUIRED

- DOOR HANDLES**
- ☐ PADLOCK PROVISION (STANDARD)
- ☐ KEYLOCK (OPTION)

- BASE EXTENSION**
- ☐ 4" BASE EXTENSION
- ☐ 6" BASE EXTENSION
- ☐ 8" BASE EXTENSION
- ☐ 10" BASE EXTENSION
- ☐ 12" BASE EXTENSION
- ☐ NOT REQUIRED

*NOTE: UL & NON-UL OPTIONS
AVAILABLE

ALL DIMENSIONS ARE ESTIMATED IN INCHES
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME _____

APPROVED (PRINTED NAME) _____

SIGNATURE _____

DATE _____

30" H x 24" W x 20" D 1 DOOR DESIGN

A/C MATERIAL (EXTERIOR)

- ☐ 304 STAINLESS STEEL
☐ 316 STAINLESS STEEL
☐ OTHER _____

AIR CONDITIONER

- ☐ 1000 BTU (NE/CS)
☐ 1500 BTU (NE)
☐ 2000 BTU (CS)
☐ SPECIFY _____
☐ NOT REQUIRED

A/C VOLTAGE/ HZ

- ☐ 115 VOLTS
☐ 230 VOLTS
☐ 480 VOLTS
☐ 60 HZ
☐ 50 HZ
☐ 48 VDC (CS011 A/C ONLY)

A/C INTEGRATED HEATER


- ☐ 350 WATTS (CS011 A/C ONLY)
☐ 500 WATTS
☐ 1000 WATTS
☐ EXTERNAL HEATER

ADDITIONAL A/C OPTIONS

- ☐ CORROSION PROTECTION PACKAGE
☐ DRY CONTACT (OUTPUT SIGNAL)
☐ 2" DEEP FILTERS
☐ PROXIMITY SWITCH (ON/OFF)

AIR CONDITIONER- SCADA

- ☐ MODBUS RTU 485 (2 WIRE)
 REMOTE NETWORK
 ETHERNET CONNECTION
☐ MODBUS GATEWAY
 ADD-ON

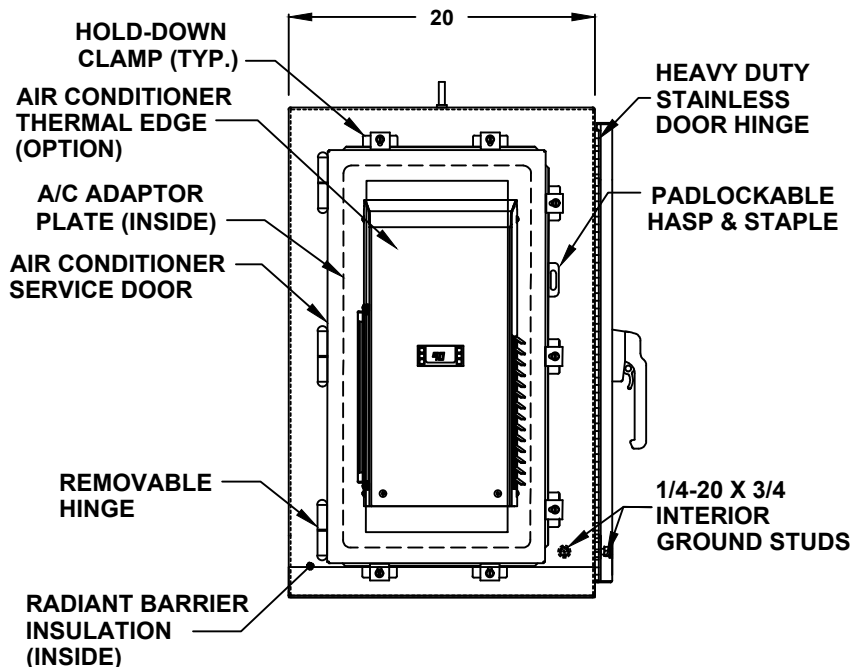

LEFT SIDE

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
☐ INTERIOR TEMP. _____ °F
☐ HEAT LOAD (WATTS) _____
☐ SUN / SHADE _____

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

A/C SERVICE DOOR

- ☐ INSTALL A/C SERVICE DOOR
☐ NOT REQUIRED

A/C SERVICE DOOR HINGE

- ☐ REMOVABLE HINGE
☐ CONTINUOUS HINGE


A/C ADAPTOR PLATE

- ☐ INSTALL A/C ADAPTOR PLATE
☐ NOT REQUIRED

30" H x 24" W x 20" D 1 DOOR DESIGN

RACK RAIL OPTIONS


- ☐ BLACK CLIP NUTS, #10-32, (100 EA.)
- ☐ #10/32 HIGH POINT SCREWS (100 EA.)
- ☐ M6 CAGE NUTS

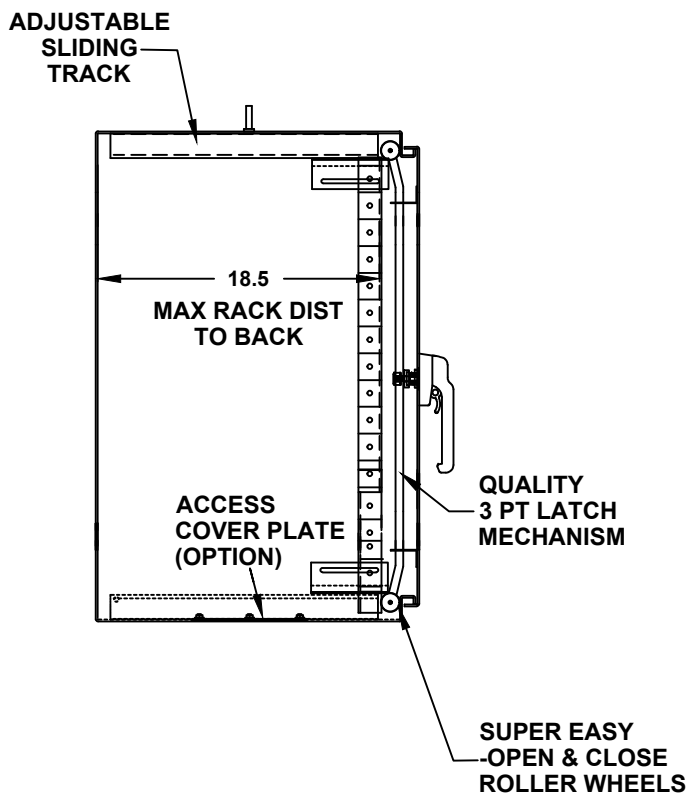

CROSS SECTION VIEW A-A

OTHER OPTIONS

- ☐ 19" RACK COPPER BUSBAR
- ☐ VERTICAL RACK PDU

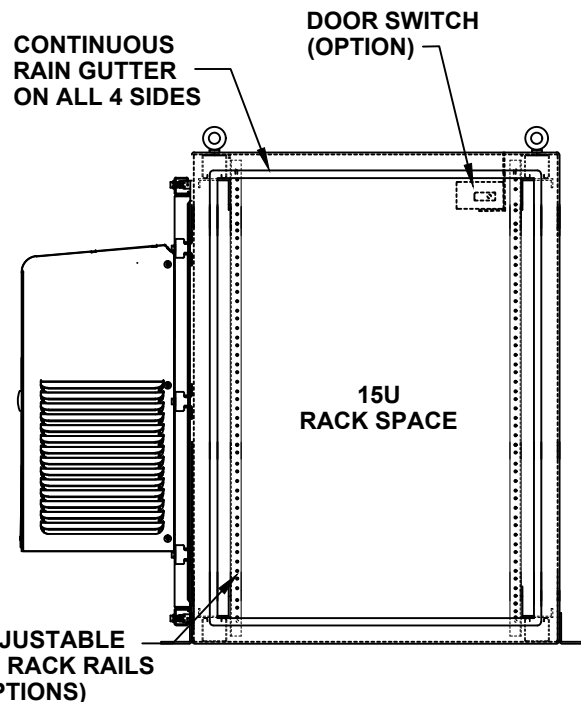

FRONT VIEW WITH DOOR REMOVED

DOOR OPTIONS

- ☐ DOOR SWITCH
- ☐ PRINT POCKET

DOOR SWITCH OPTIONS

- ☐ 10A (STANDARD)
- ☐ 16A

RACK RAIL POST

- ☐ QTY 2 POST
- ☐ QTY 4 POST (REARDOOR REQUIRED)

RACK RAIL MATERIAL

- ☐ POWDER COATED STEEL (STANDARD)
- ☐ 304 STAINLESS STEEL

RACK RAIL MOUNTING HOLES

- ☐ #10-32 TAP (STANDARD)
- ☐ #1/4-20 TAP
- ☐ 3/8 SQUARE

RACK RAIL TYPE

- ☐ STANDARD GRADE
- ☐ HEAVY DUTY RAILS (OPTION)

RACK SHELVES (OPTION)

- ☐ STANDARD RACK SHELVES
- ☐ SLIDING RACK SHELVES
- ☐ RACK SHELF SUPPORT


RACK DRAWERS (OPTION)

- ☐ RACK DRAWERS
- ☐ LAPTOP DRAWERS

30" H x 24" W x 20" D 1 DOOR DESIGN

DOOR STOPPER

- ☐ INSTALL DOOR STOPPER
☐ NOT REQUIRED

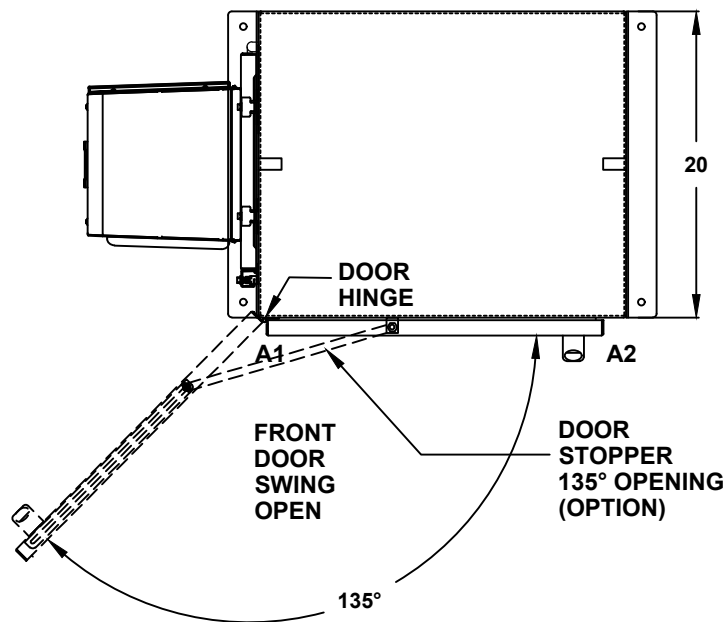


TOP VIEW

BASE ACCESS COVER PLATE (OPTION)

- ☐ 8x8 PLATE (6x6 CUT-OUT)
☐ 8x16 PLATE (6x14 CUT-OUT)
☐ 12x12 PLATE (10x10 CUT-OUT)
☐ 16x16 PLATE (14x14 CUT-OUT)

SIDE ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
☐ POWDER COATED ALUMINUM
☐ STAINLESS STEEL, 304

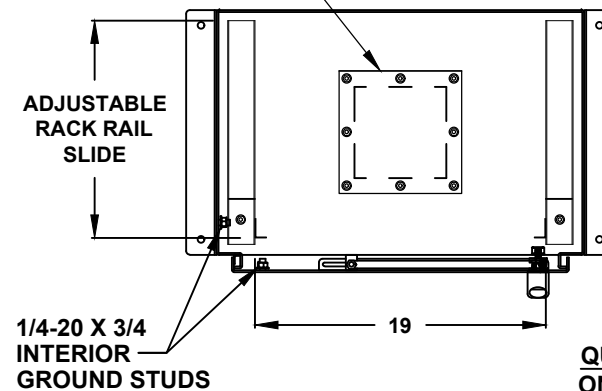

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION
☐ PIPE FITTING HUB
☐ CABLE GLAND

QUAD OUTLET BOX ON 8x8 PLATE (OPTION)


- ☐ ADD QUAD BOX
☐ NOT REQUIRED

OUTLET BOX AMP.


- ☐ 15A
☐ 20A

TOP CROSS SECTION VIEW B-B


30" H x 24" W x 20" D
1 DOOR DESIGN

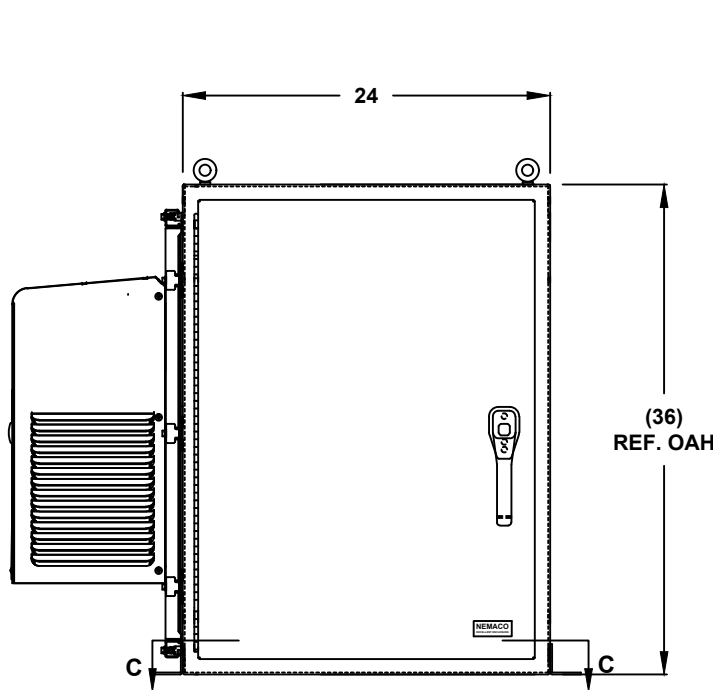

FRONT VIEW

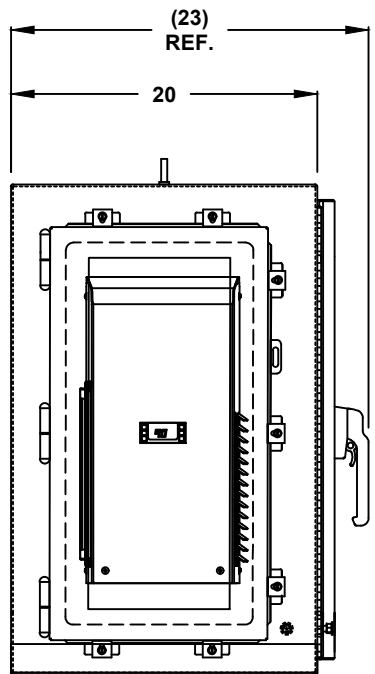

LEFT SIDE

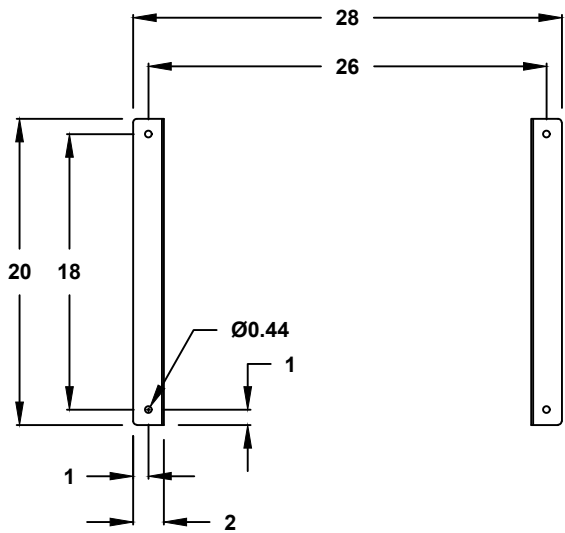

CROSS SECTION VIEW C-C
MOUNTING HOLES