

**NEMA 4X - ENCLOSURE
19" RACKMOUNT - 39U HEIGHT
WALL MOUNT**

STAINLESS STEEL

ENCLOSURE MATERIAL

- ☐ 304 STAINLESS STEEL (S4)
☐ 316 STAINLESS STEEL (S6)

CORROSION PROTECTION PACKAGE

- ☐ EXTERIOR PASSIVATION (STANDARD)
☐ INTERIOR/EXTERIOR PASSIVATION (OPTION)
☐ NOT REQUIRED (ON REQUEST ONLY)

POWDERCOAT COLOR

- ☐ WHITE
☐ LIGHT GRAY ANSI 70
☐ DARK GRAY ANSI 61
☐ BLACK
☐ CUSTOM _____


ENCLOSURE CONSTRUCTION

- ☐ 14 GA THK.
☐ 12 GA THK.

ENCLOSURE DOOR HINGE

- ☐ CONTINUOUS PIANO HINGE (STANDARD)
☐ REMOVABLE LIFT OFF HINGE

AIR CONDITIONER (OPTION)
REF. TO PAGE 2

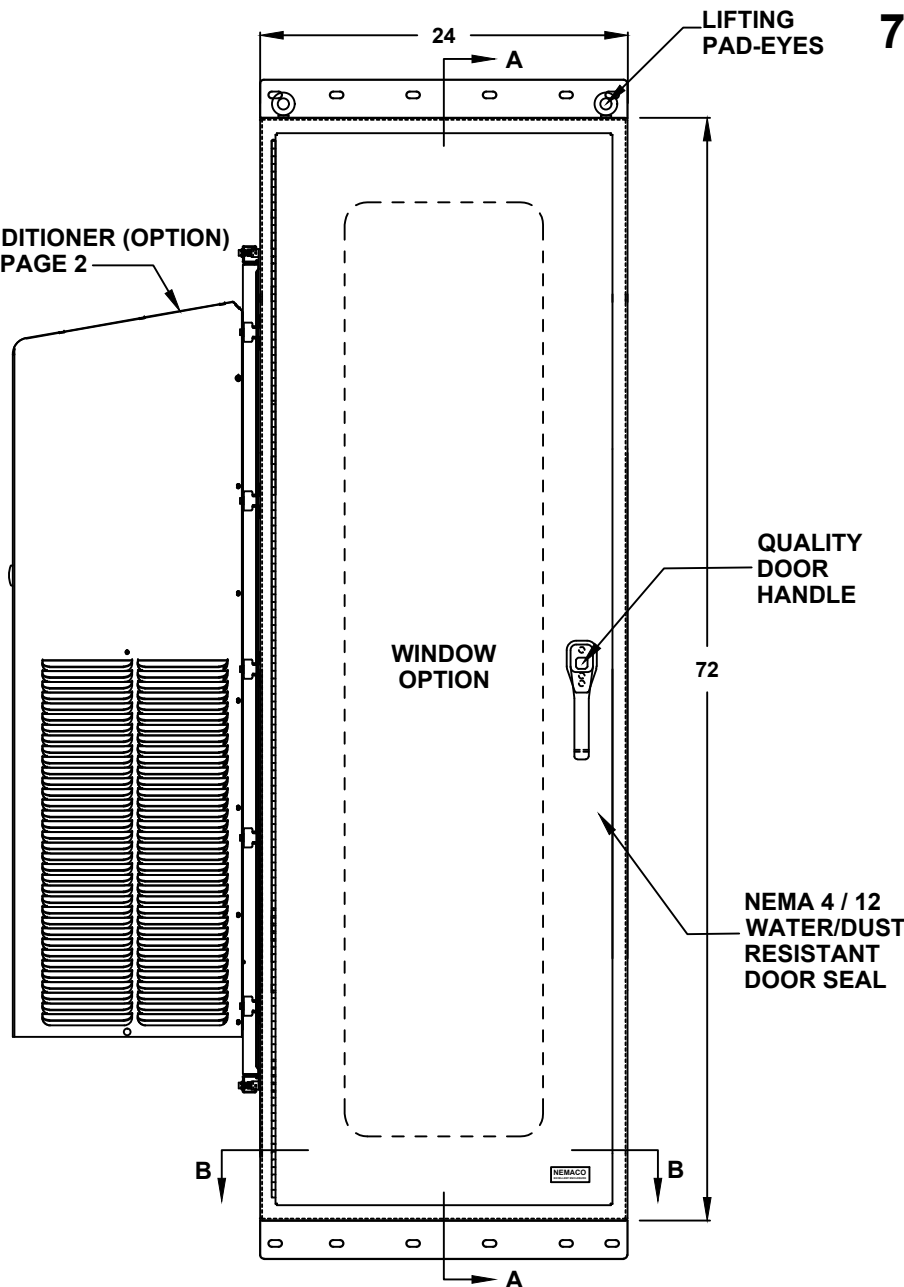

FRONT VIEW

**72" H x 24" W x 20" D
1 DOOR DESIGN**



FILE NUMBER: E507642

LIFTING EYES

- ☐ WELDED PADEYES (STANDARD)
☐ REMOVABLE PADEYES

***WINDOW OPTIONS**

- ☐ TINTED WINDOW
☐ TEMPERED GLASS
☐ NOT REQUIRED

DOOR HANDLES

- ☐ PADLOCK PROVISION (STANDARD)
☐ KEYLOCK (OPTION)

WALL BRACKET (OPTIONS)

- ☐ WALL TABS (STANDARD)
☐ HEAVY DUTY BRACKETS
☐ POLE MOUNT BRACKETS

***NOTE: UL & NON-UL OPTIONS
AVAILABLE**

ALL DIMENSIONS ARE ESTIMATED IN INCHES
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME _____

APPROVED (PRINTED NAME) _____

SIGNATURE _____

DATE _____

72" H x 24" W x 20" D 1 DOOR DESIGN

A/C MATERIAL (EXTERIOR)

- ☐ 304 STAINLESS STEEL
☐ 316 STAINLESS STEEL
☐ OTHER _____

AIR CONDITIONER

- ☐ 1000 BTU
☐ 2000 BTU
☐ 3000 BTU
☐ 4000 BTU
☐ 5000 BTU
☐ 6000 BTU
☐ 8000 BTU
☐ 10000 BTU
☐ 12000 BTU
☐ 15000 BTU
☐ 20000 BTU
☐ SPECIFY _____
☐ NOT REQUIRED

A/C VOLTAGE/ HZ

- ☐ 115 VOLTS
☐ 230 VOLTS
☐ 480 VOLTS
☐ 60 HZ
☐ 50 HZ
☐ 48 VDC (CS011 / NE040 A/C ONLY)

A/C INTEGRATED HEATER


- ☐ 350 WATTS (CS011 A/C ONLY)
☐ 500 WATTS (C3020)
☐ 1000 WATTS
☐ EXTERNAL HEATER

ADDITIONAL A/C OPTIONS

- ☐ CORROSION PROTECTION PACKAGE
☐ DRY CONTACT (OUTPUT SIGNAL)
☐ 2" DEEP FILTERS
☐ PROXIMITY SWITCH (ON/OFF)

AIR CONDITIONER- SCADA

- ☐ MOBUS RTU 485 (2 WIRE)
 REMOTE NETWORK
 ETHERNET CONNECTION
☐ MOBUS GATEWAY
 ADD-ON

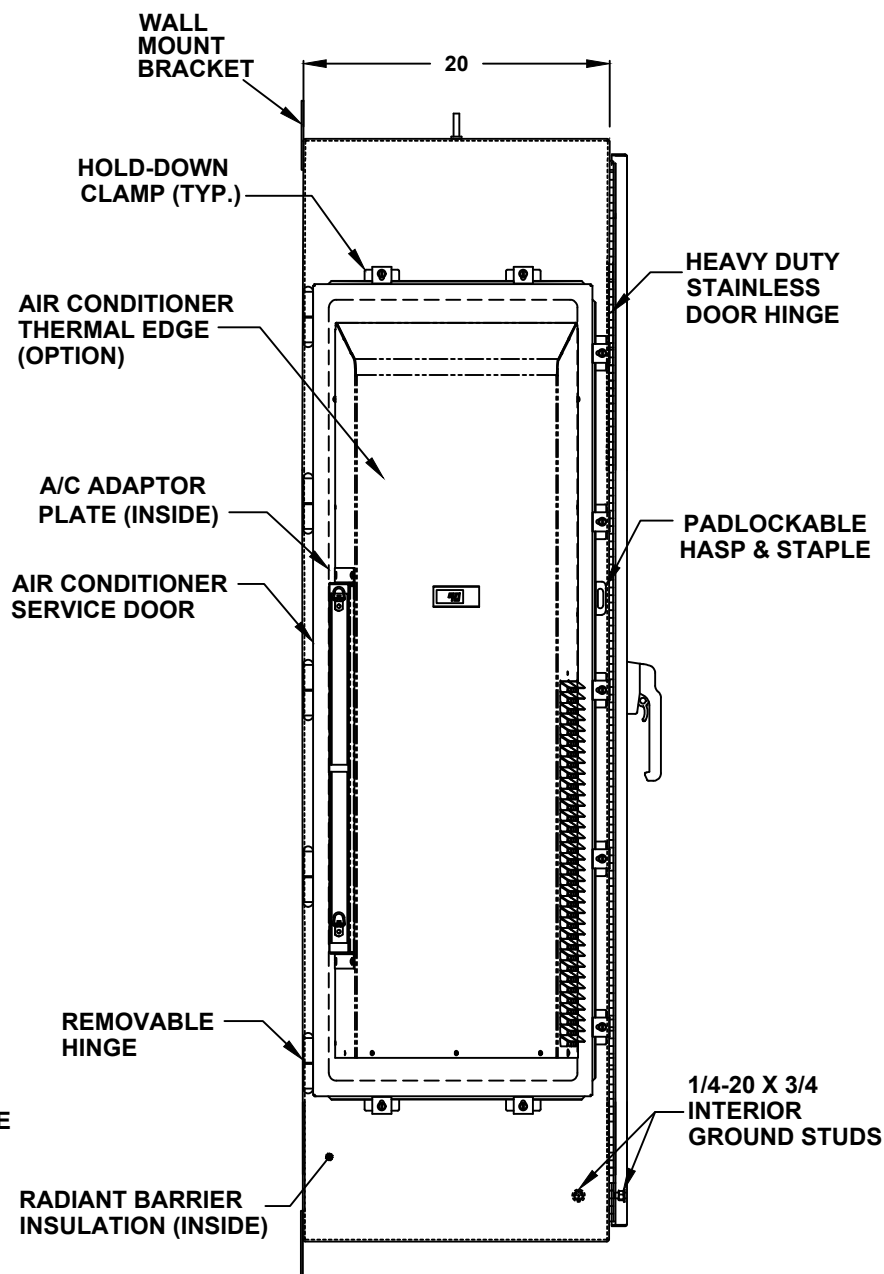

LEFT SIDE

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
☐ INTERIOR TEMP. _____ °F
☐ HEAT LOAD (WATTS) _____
☐ SUN / SHADE _____

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

A/C SERVICE DOOR

- ☐ INSTALL A/C SERVICE DOOR
☐ NOT REQUIRED

A/C SERVICE DOOR HINGE


- ☐ REMOVABLE HINGE
☐ CONTINUOUS HINGE

A/C ADAPTOR PLATE

- ☐ INSTALL A/C ADAPTOR PLATE
☐ NOT REQUIRED


RACK RAIL OPTIONS

- ☐ BLACK CLIP NUTS, #10-32, (100 EA.)
- ☐ #10/32 HIGH POINT SCREWS (100 EA.)
- ☐ M6 CAGE NUTS

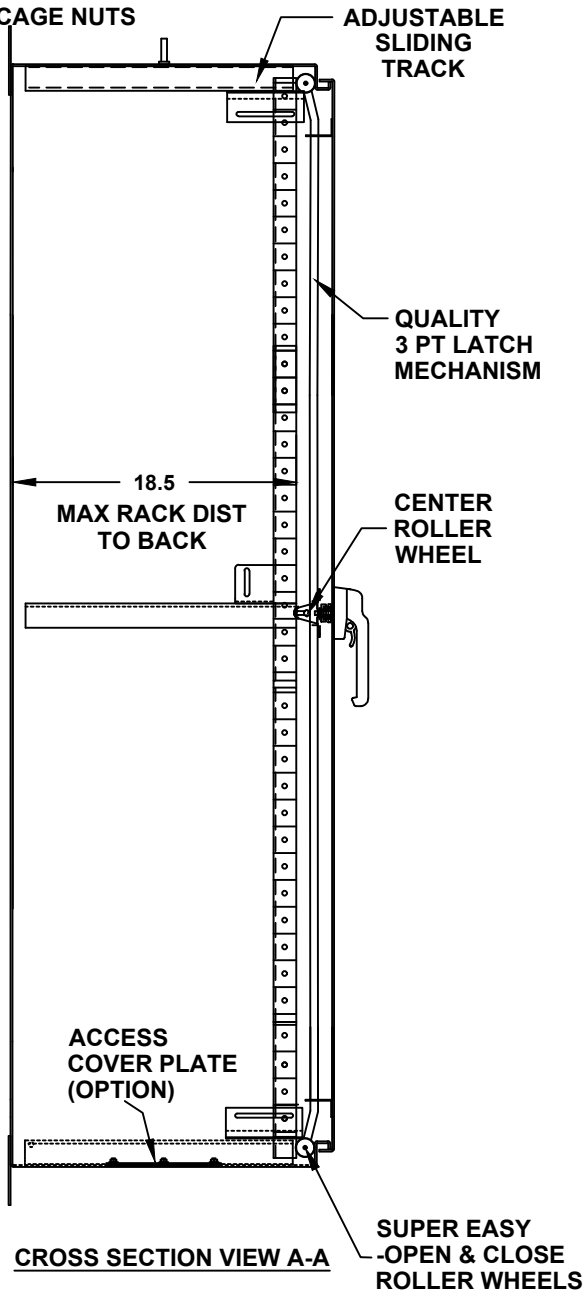

CONTINUOUS RAIN GUTTER ON ALL 4 SIDES

DOOR SWITCH (OPTION)

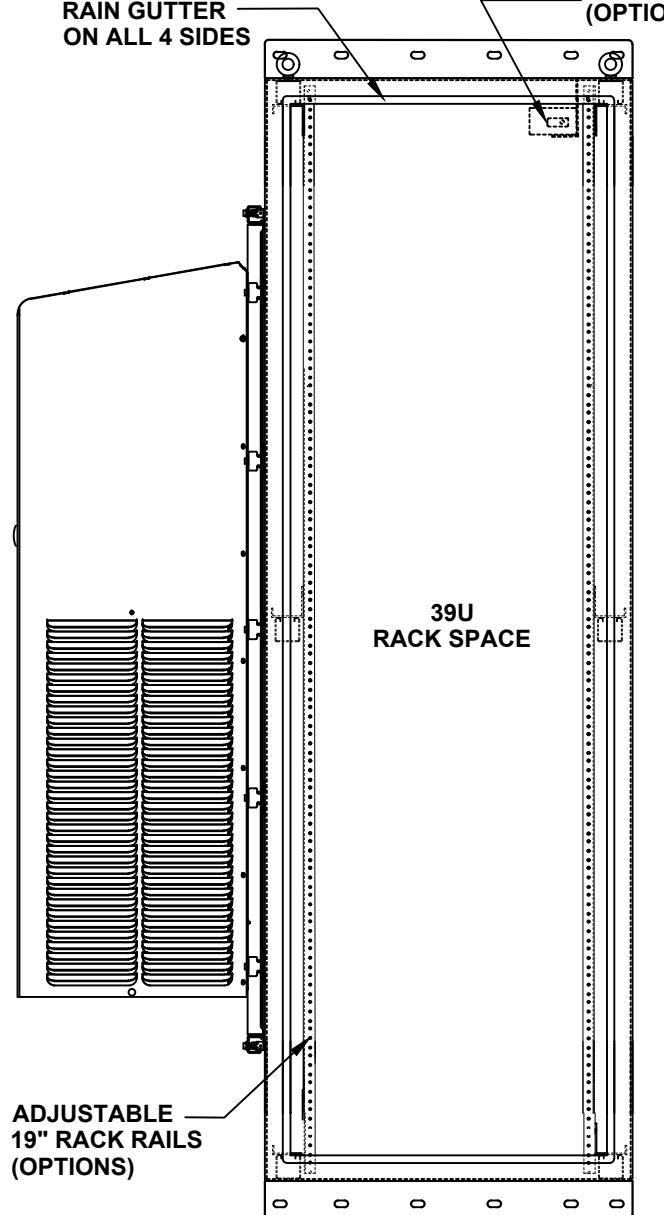

**72" H x 24" W x 20" D
1 DOOR DESIGN**

DOOR OPTIONS

- ☐ DOOR SWITCH
- ☐ PRINT POCKET

DOOR SWITCH OPTIONS

- ☐ 10A (STANDARD)
- ☐ 16A

RACK RAIL POST

- ☐ QTY 2 POST
- ☐ QTY 4 POST (REARDOOR REQUIRED)

RACK RAIL MATERIAL

- ☐ POWDER COATED STEEL (STANDARD)
- ☐ 304 STAINLESS STEEL

RACK RAIL MOUNTING HOLES

- ☐ #10-32 TAP (STANDARD)
- ☐ #1/4-20 TAP
- ☐ 3/8 SQUARE

RACK RAIL TYPE

- ☐ STANDARD GRADE
- ☐ HEAVY DUTY RAILS (OPTION)

RACK SHELVES (OPTION)

- ☐ STANDARD RACK SHELVES
- ☐ SLIDING RACK SHELVES
- ☐ RACK SHELF SUPPORT

RACK DRAWERS (OPTION)

- ☐ RACK DRAWERS
- ☐ LAPTOP DRAWERS


OTHER OPTIONS

- ☐ 19" RACK COPPER BUSBAR
- ☐ VERTICAL RACK PDU

72" H x 24" W x 20" D 1 DOOR DESIGN

DOOR STOPPER

- ☐ INSTALL DOOR STOPPER
- ☐ NOT REQUIRED

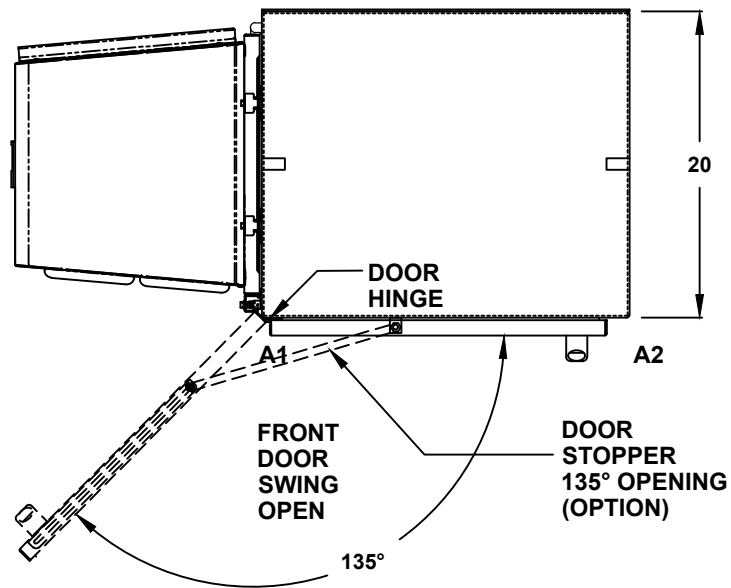


TOP VIEW

BASE ACCESS COVER PLATE (OPTION)

- ☐ 8x8 PLATE (6x6 CUT-OUT)
- ☐ 8x16 PLATE (6x14 CUT-OUT)
- ☐ 12x12 PLATE (10x10 CUT-OUT)
- ☐ 16x16 PLATE (14x14 CUT-OUT)

SIDE ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
- ☐ POWDER COATED ALUMINUM
- ☐ STAINLESS STEEL, 304

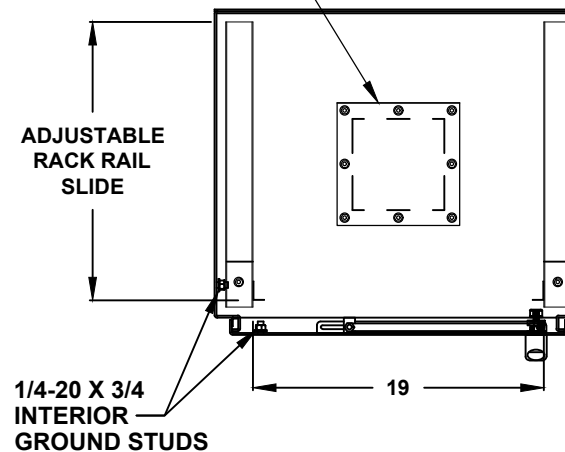

TOP CROSS SECTION VIEW B-B

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION
- ☐ PIPE FITTING HUB
- ☐ CABLE GLAND


QUAD OUTLET BOX ON 8x8 PLATE (OPTION)

- ☐ ADD QUAD BOX
- ☐ NOT REQUIRED


OUTLET BOX AMP.

- ☐ 15A
- ☐ 20A

72" H x 24" W x 20" D
1 DOOR DESIGN

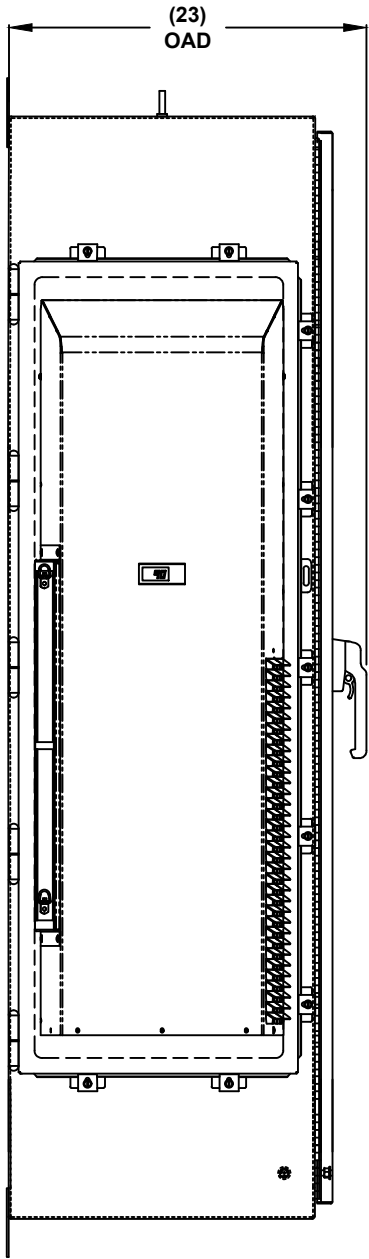

LEFT SIDE

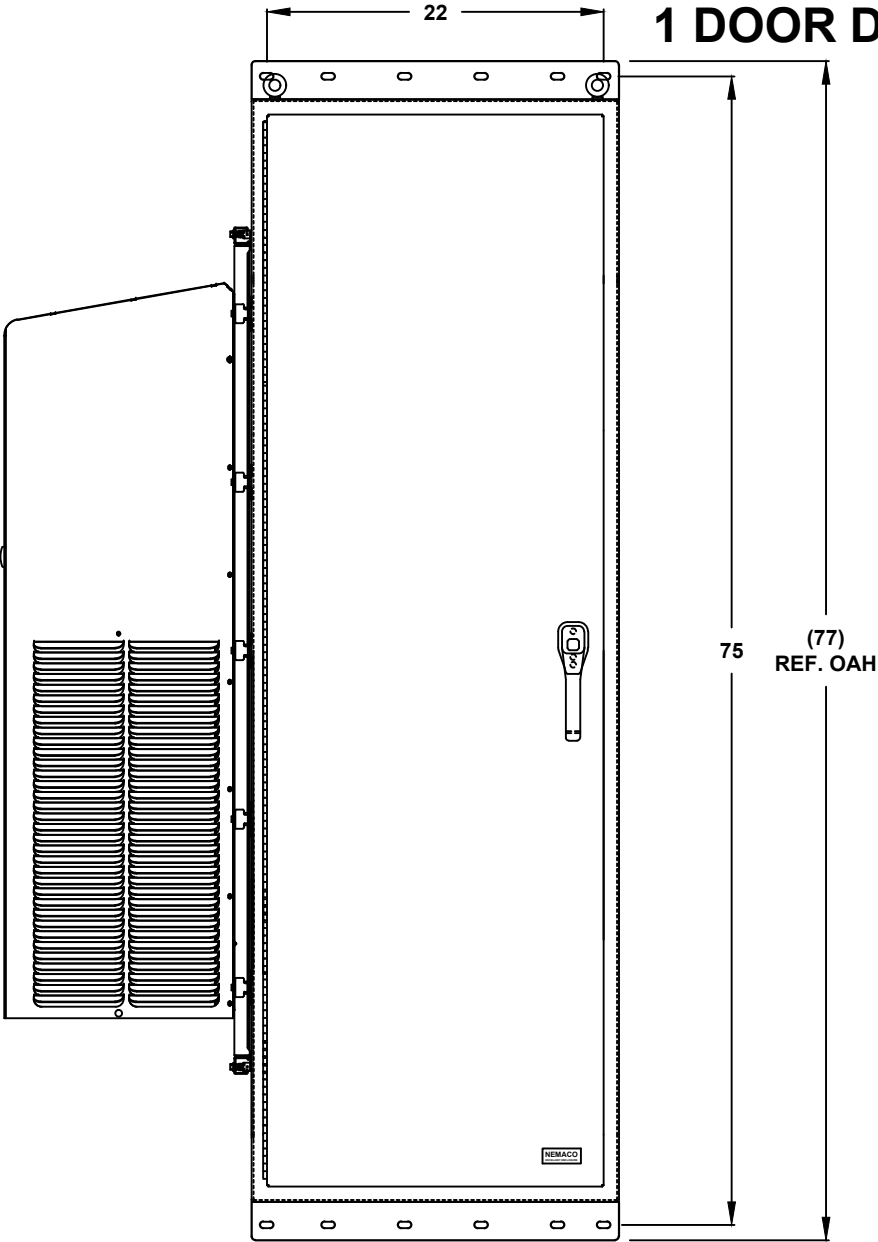

FRONT VIEW