

NEMA 4/12 - ENCLOSURE
19" RACKMOUNT - 39U HEIGHT
FLOOR MOUNT

AIR CONDITIONER (OPTION)
 REF. TO PAGE 2


ENCLOSURE MATERIAL

- ☐ POWDER COATED STEEL (CS)
☐ POWDER COATED ALUMINUM (AL)

POWDERCOAT COLOR

- ☐ WHITE
☐ LIGHT GRAY ANSI 70
☐ DARK GRAY ANSI 61
☐ BLACK
☐ CUSTOM _____

ALL DIMENSIONS ARE ESTIMATED IN INCHES
 AND MAY VARY DUE TO SELECTED OPTIONS.

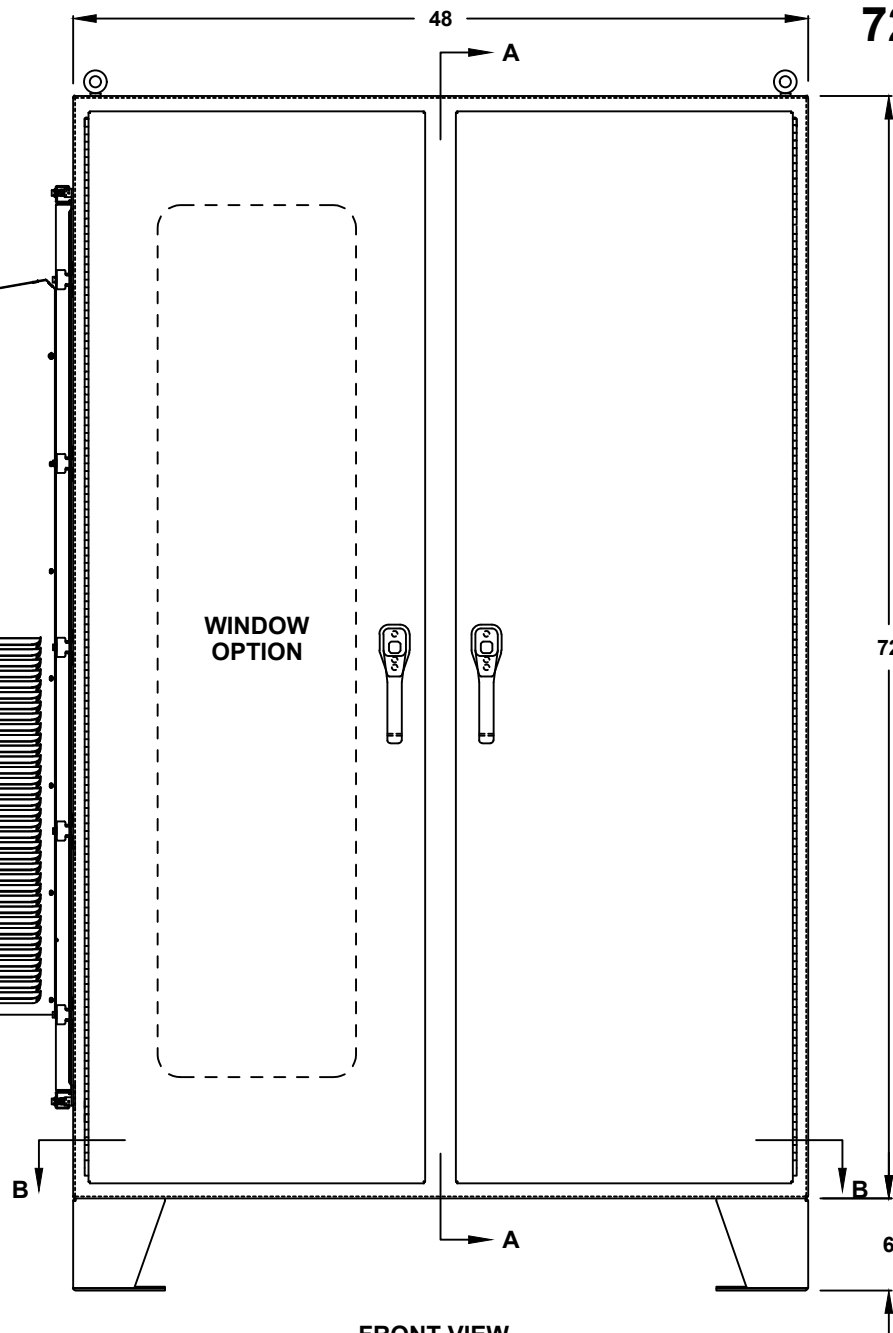

FRONT VIEW

72" H x 48" W x 36" D
4 DOOR DESIGN



FILE NUMBER: E507642

LIFTING EYES

- ☐ WELDED PADEYES (STANDARD)
☐ REMOVABLE PADEYES

***WINDOW OPTIONS**

- ☐ CLEAR WINDOW
☐ TINTED WINDOW
☐ TEMPERED GLASS
☐ NOT REQUIRED

DOOR HANDLES

- ☐ PADLOCK PROVISION (STANDARD)
☐ KEYLOCK (OPTION)

FLOOR KIT

- ☐ 6" HT. (STANDARD)
☐ 8" HT.
☐ 10" HT.
☐ 12" HT.
☐ CUSTOM _____

*NOTE: UL & NON-UL OPTIONS
 AVAILABLE

COMPANY NAME _____

APPROVED (PRINTED NAME) _____

SIGNATURE _____

DATE _____

72" H x 48" W x 36" D 4 DOOR DESIGN

AIR CONDITIONER

- ☐ 1000 BTU
- ☐ 2000 BTU
- ☐ 3000 BTU
- ☐ 4000 BTU
- ☐ 5000 BTU
- ☐ 6000 BTU
- ☐ 8000 BTU
- ☐ 10000 BTU
- ☐ 12000 BTU
- ☐ 15000 BTU
- ☐ 20000 BTU
- ☐ SPECIFY _____
- ☐ NOT REQUIRED

A/C VOLTAGE/ HZ

- ☐ 115 VOLTS
- ☐ 230 VOLTS
- ☐ 480 VOLTS
- ☐ 60 HZ
- ☐ 50 HZ
- ☐ 48 VDC (CS011 / NE040 A/C ONLY)

A/C INTEGRATED HEATER


- ☐ 350 WATTS (CS011 A/C ONLY)
- ☐ 500 WATTS (C3020)
- ☐ 1000 WATTS
- ☐ EXTERNAL HEATER

ADDITIONAL A/C OPTIONS

- ☐ CORROSION PROTECTION PACKAGE
- ☐ DRY CONTACT (OUTPUT SIGNAL)
- ☐ 2" DEEP FILTERS
- ☐ PROXIMITY SWITCH (ON/OFF)

AIR CONDITIONER- SCADA

- ☐ MOBUS RTU 485 (2 WIRE)
REMOTE NETWORK
ETHERNET CONNECTION
- ☐ MOBUS GATEWAY
ADD-ON

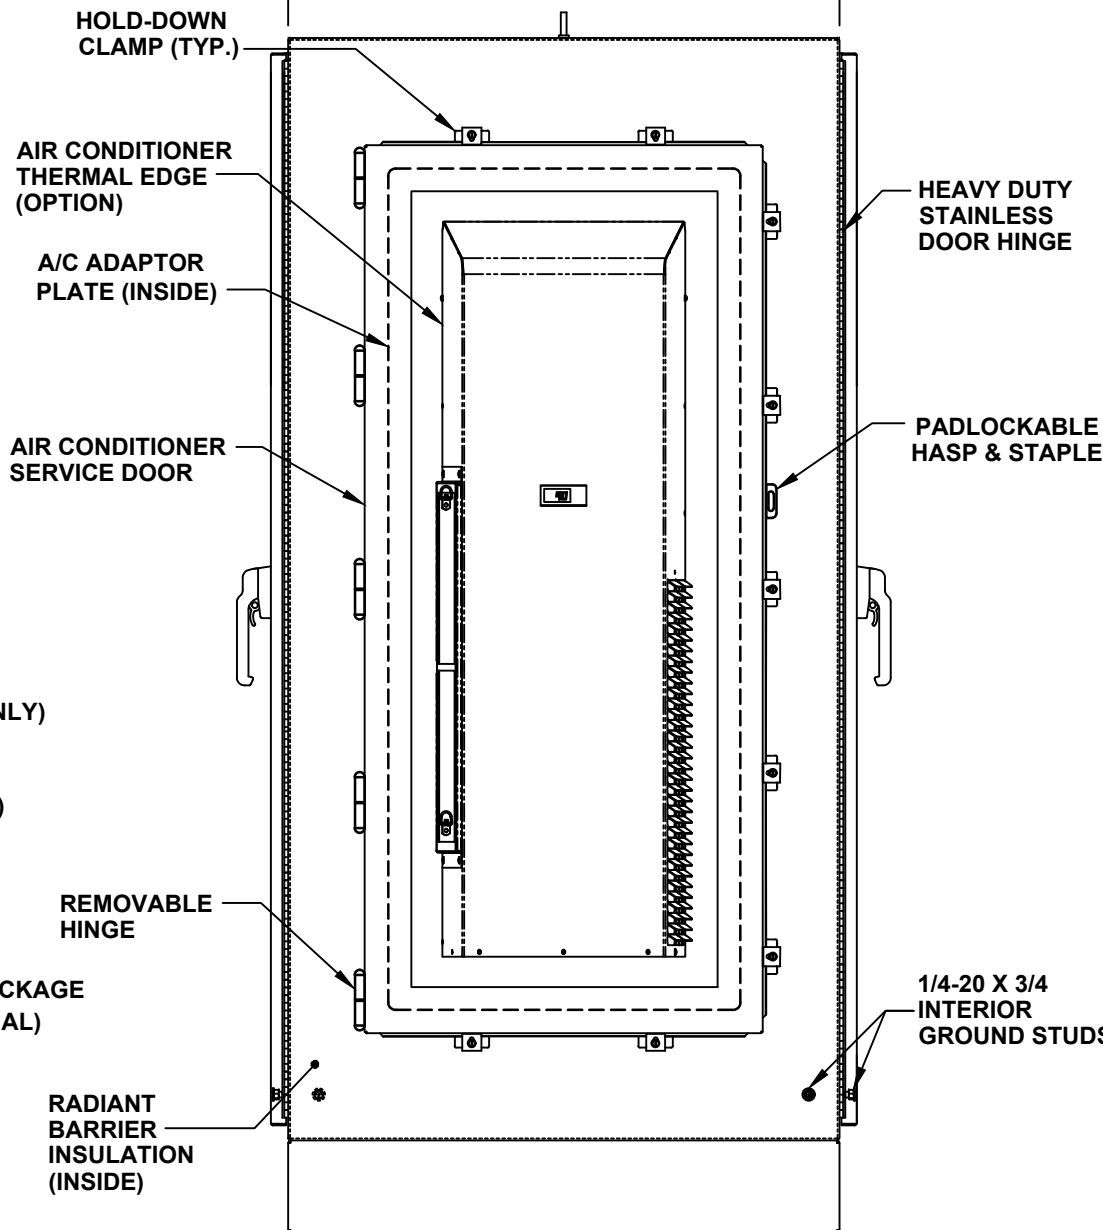

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
- ☐ INTERIOR TEMP. _____ °F
- ☐ HEAT LOAD (WATTS) _____
- ☐ SUN / SHADE _____

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
- ☐ 3/4 RADIANT BARRIER
- ☐ 1 RADIANT BARRIER
- ☐ NOT REQUIRED

A/C SERVICE DOOR

- ☐ INSTALL A/C SERVICE DOOR
- ☐ NOT REQUIRED

A/C SERVICE DOOR HINGE


- ☐ REMOVABLE HINGE
- ☐ CONTINUOUS HINGE

A/C ADAPTOR PLATE

- ☐ INSTALL A/C ADAPTOR PLATE
- ☐ NOT REQUIRED

LEFT SIDE

72" H x 48" W x 36" D
4 DOOR DESIGN

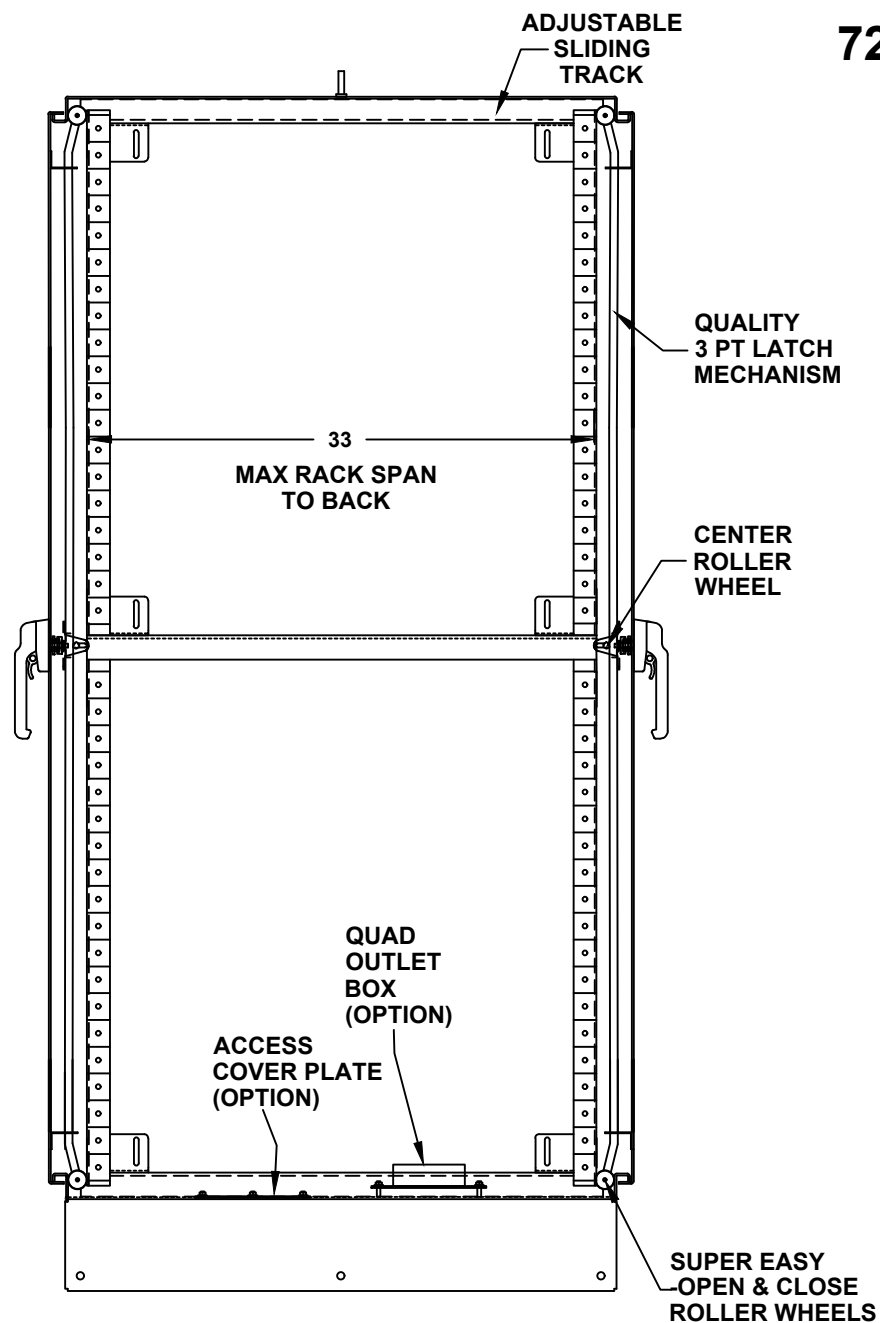


CROSS SECTION VIEW A-A

72" H x 48" W x 36" D 4 DOOR DESIGN

RACK RAIL OPTIONS

- ☐ BLACK CLIP NUTS, #10-32, (100 EA.)
- ☐ #10/32 HIGH POINT SCREWS (100 EA.)
- ☐ M6 CAGE NUTS

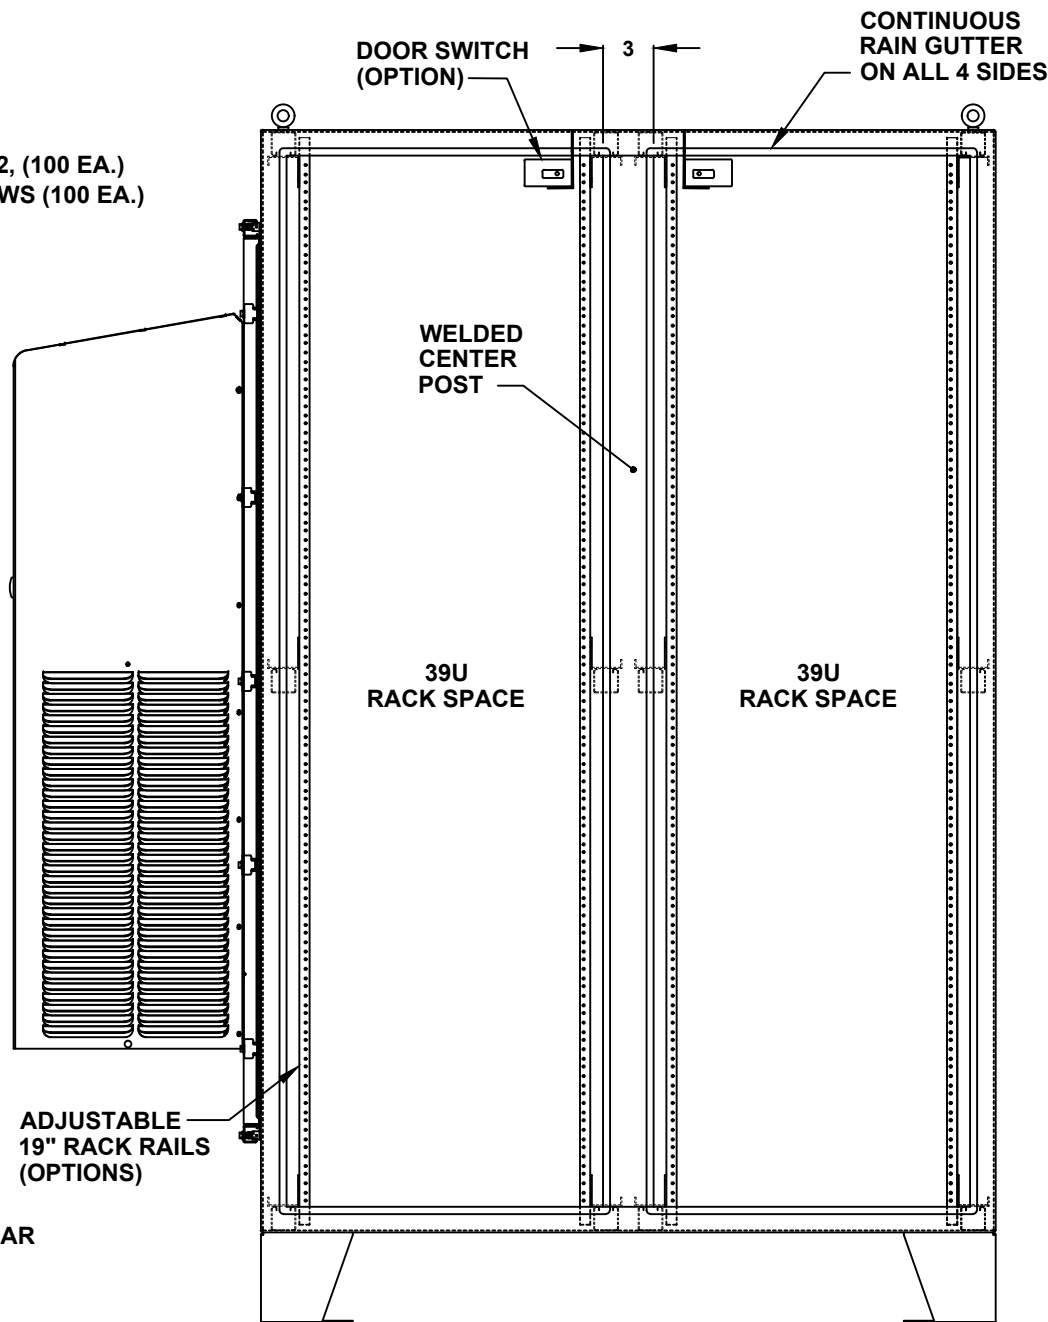

FRONT VIEW WITH DOOR REMOVED

OTHER OPTIONS

- ☐ 19" RACK COPPER BUSBAR
- ☐ VERTICAL RACK PDU

DOOR OPTIONS

- ☐ DOOR SWITCH
- ☐ ELECTROMAGNETIC LOCK
- ☐ PRINT POCKET

CENTER POST

- ☐ WELDED (STANDARD)
- ☐ REMOVEABLE

RACK RAIL POST

- ☐ QTY 4 POST
- ☐ QTY 8 POST (REARDOOR REQUIRED)

RACK RAIL MATERIAL

- ☐ POWDER COATED STEEL (STANDARD)
- ☐ 304 STAINLESS STEEL

RACK RAIL MOUNTING HOLES

- ☐ #10-32 TAP (STANDARD)
- ☐ #1/4-20 TAP
- ☐ 3/8 SQUARE

RACK RAIL TYPE

- ☐ STANDARD GRADE
- ☐ HEAVY DUTY RAILS (OPTION)

RACK SHELVES (OPTION)


- ☐ STANDARD RACK SHELVES
- ☐ SLIDING RACK SHELVES
- ☐ RACK SHELF SUPPORT

RACK DRAWERS (OPTION)

- ☐ RACK DRAWERS
- ☐ LAPTOP DRAWERS

72" H x 48" W x 36" D
4 DOOR DESIGN

DOOR STOPPER
☐ INSTALL DOOR STOPPER
☐ NOT REQUIRED

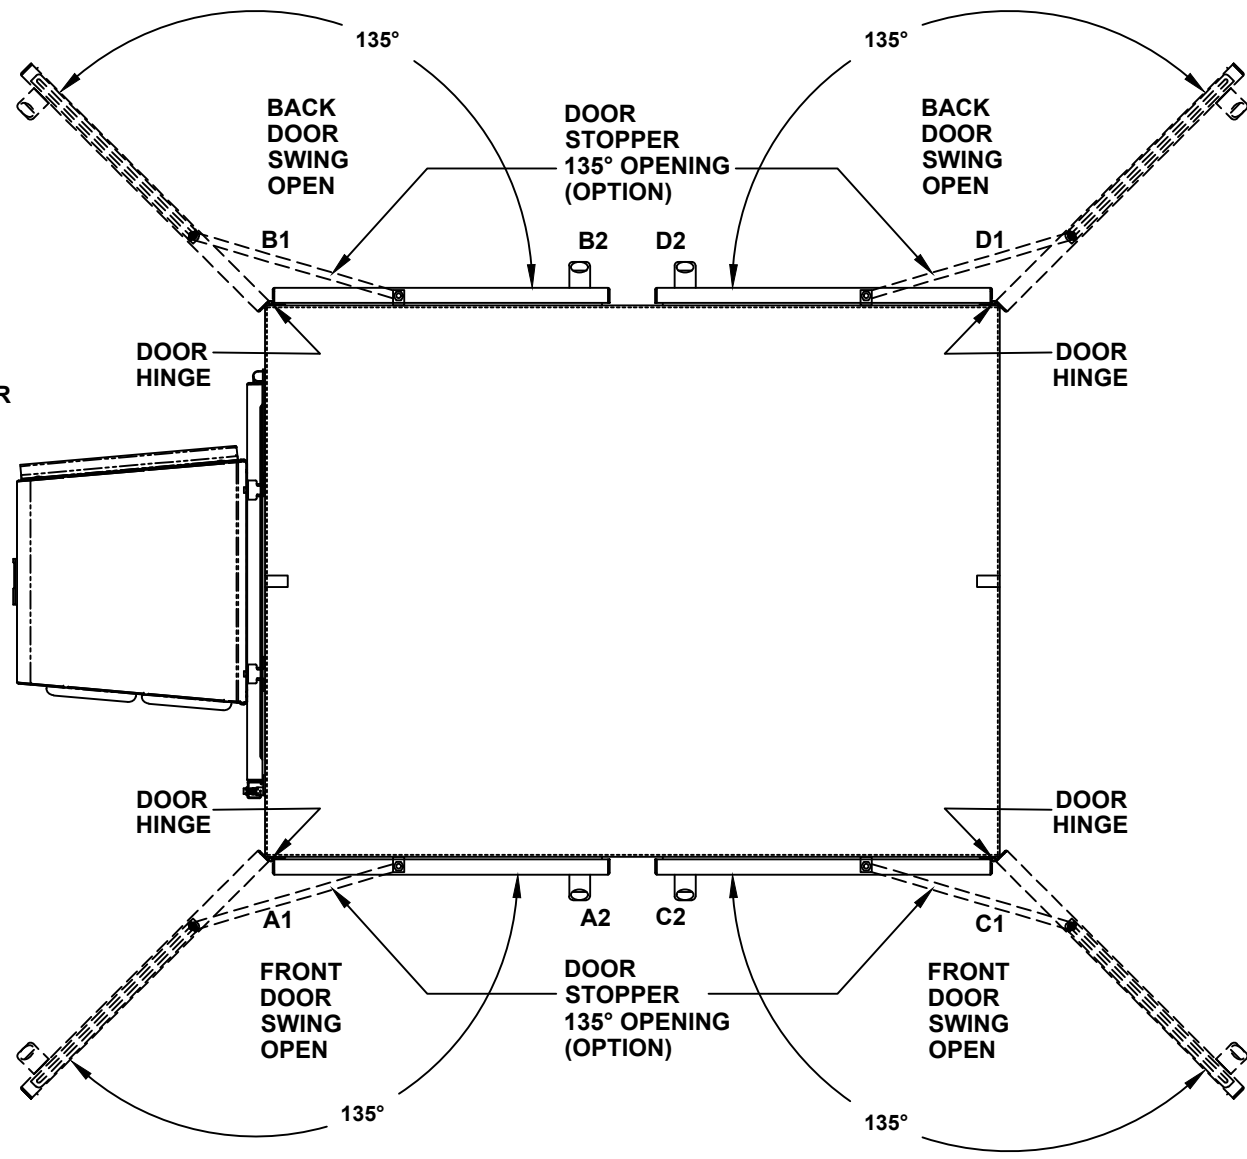

TOP VIEW

72" H x 48" W x 36" D


4 DOOR DESIGN

BASE ACCESS COVER PLATE (OPTION)

- ☐ 8x8 PLATE (6x6 CUT-OUT)
- ☐ 8x16 PLATE (6x14 CUT-OUT)
- ☐ 12x12 PLATE (10x10 CUT-OUT)
- ☐ 16x16 PLATE (14x14 CUT-OUT)

SIDE ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
- ☐ POWDER COATED ALUMINUM
- ☐ STAINLESS STEEL, 304

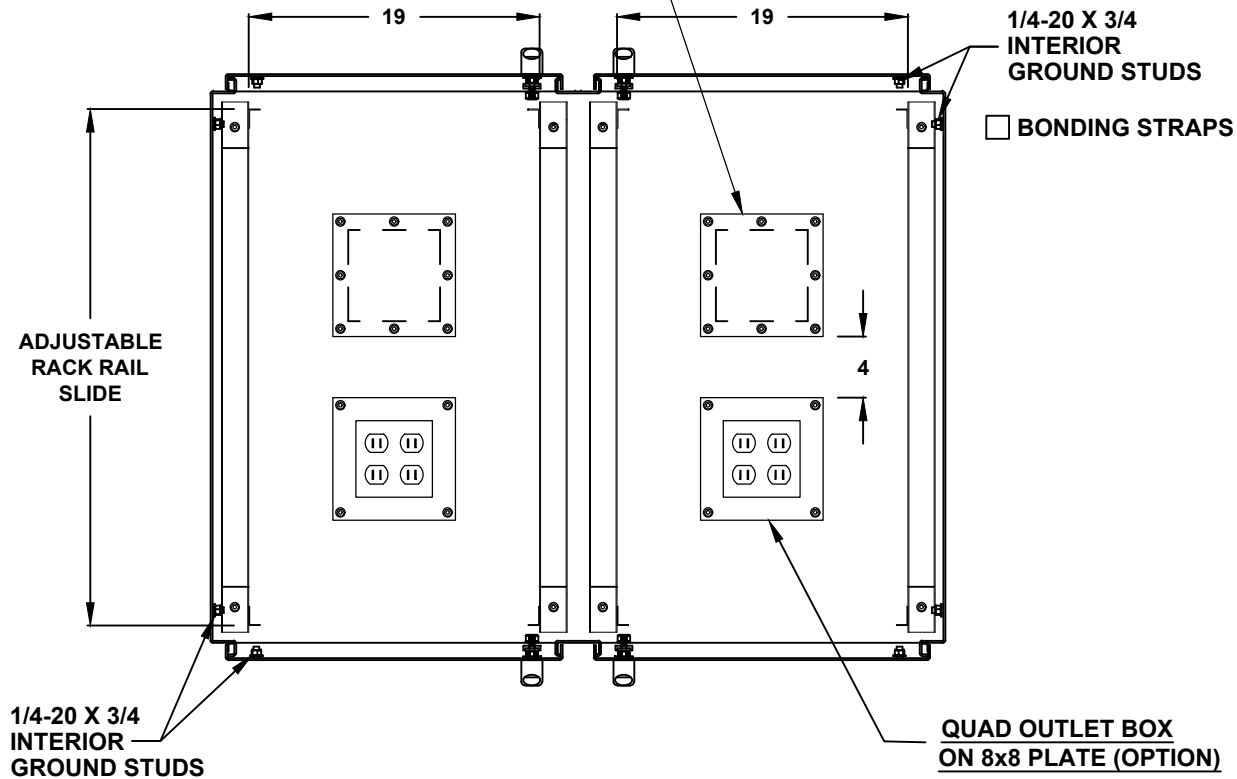

CONDUIT/CABLE SEAL OPTIONS


- ☐ ROXTEC SEAL SOLUTION
- ☐ PIPE FITTING HUB
- ☐ CABLE GLAND

QUAD OUTLET BOX ON 8x8 PLATE (OPTION)

- ☐ ADD QUAD BOX
- ☐ 15A 115V RECEPTACLE
- ☐ 20A 115V RECEPTACLE
- ☐ NOT REQUIRED


TOP CROSS SECTION VIEW B-B

72" H x 48" W x 36" D
4 DOOR DESIGN

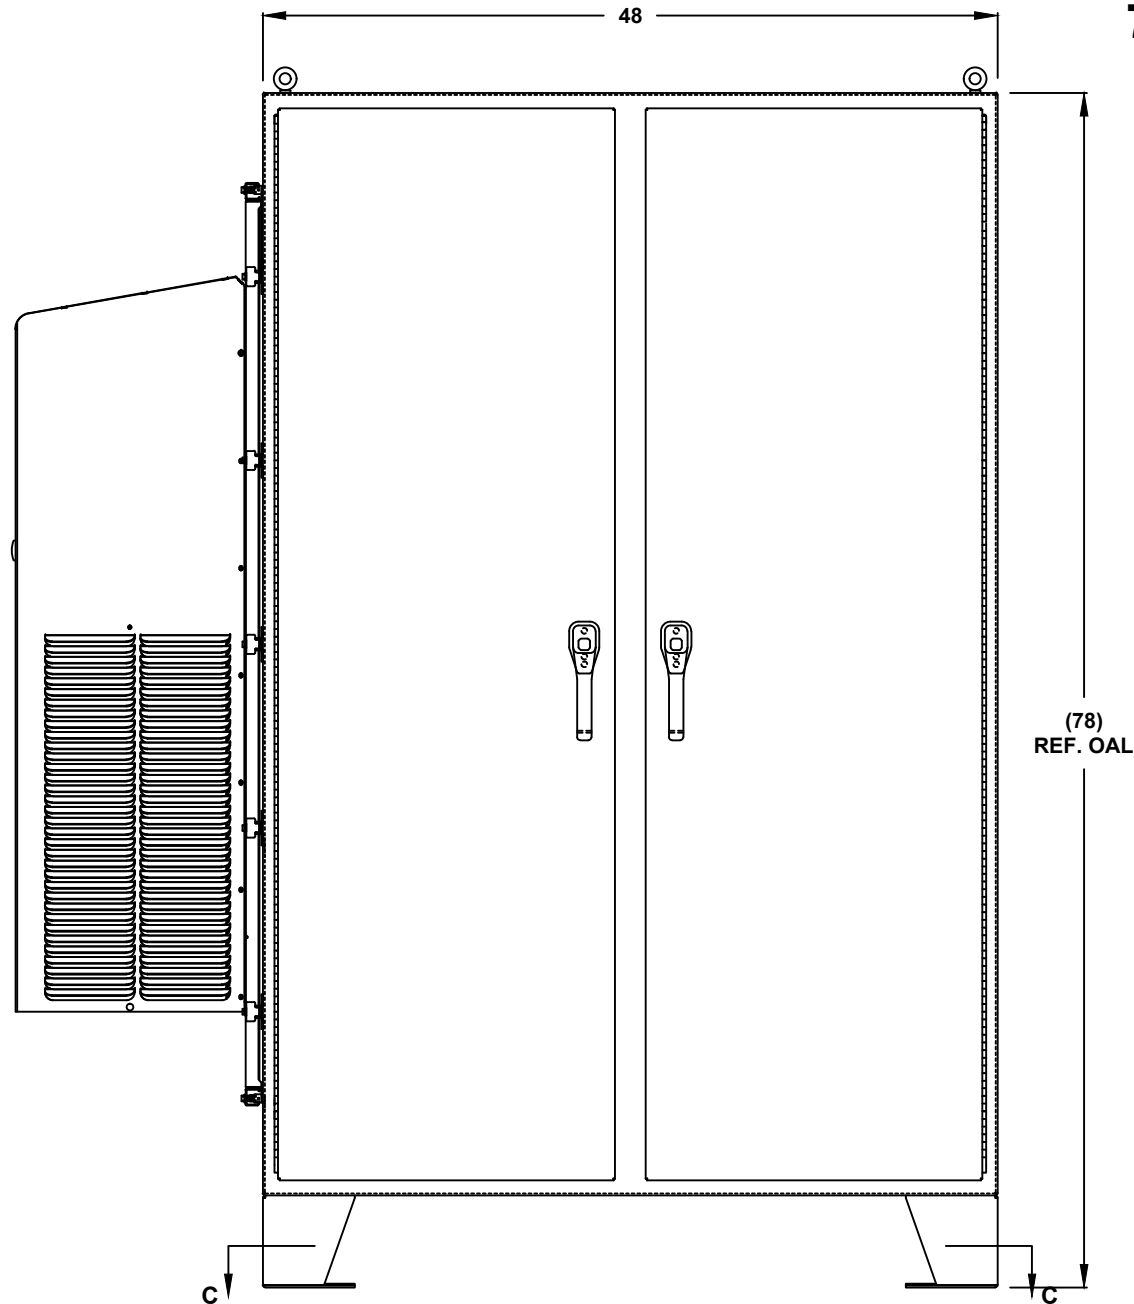


FRONT VIEW

72" H x 48" W x 36" D 4 DOOR DESIGN

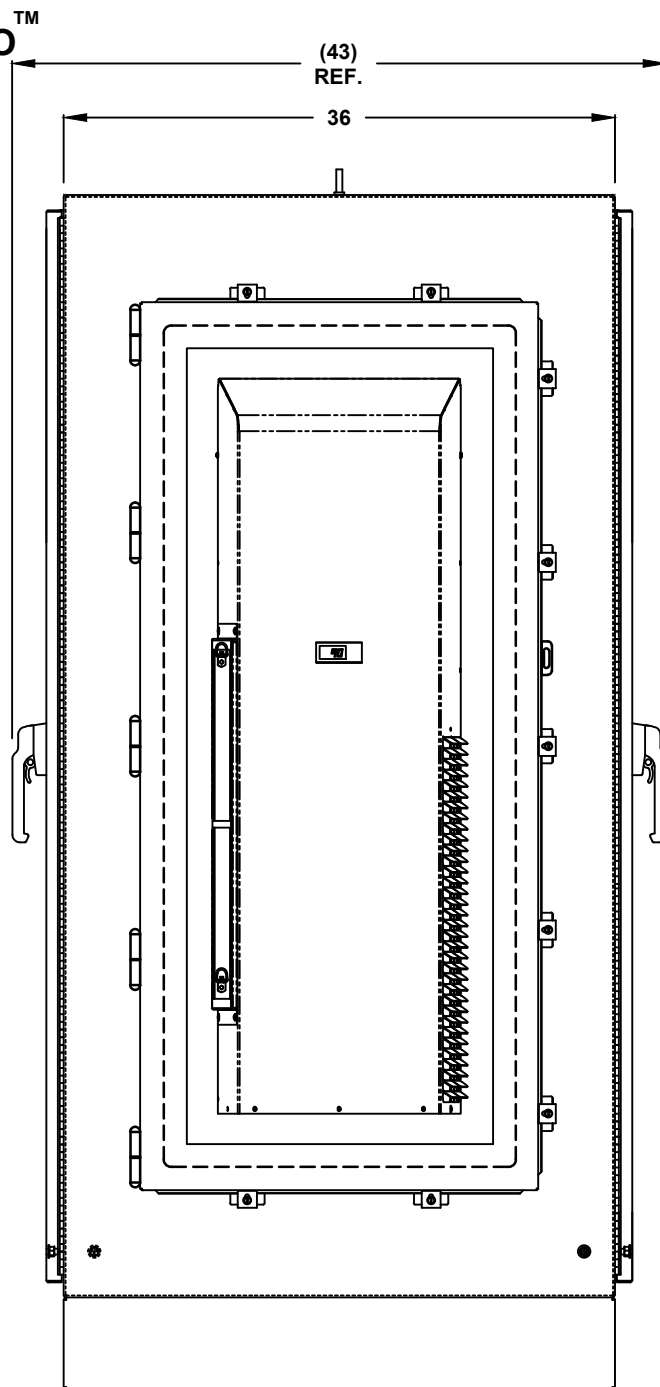

LEFT SIDE

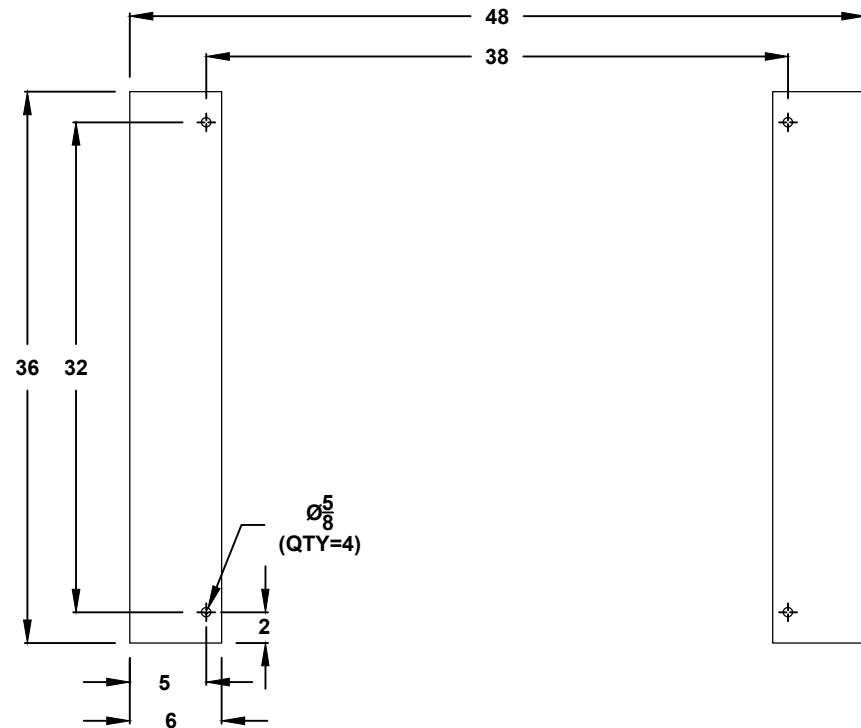

CROSS SECTION VIEW C-C
MOUNTING HOLES