

30" H x 72" W x 30" D 2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING



FILE NUMBER: E507642


- ENCLOSURE MATERIAL**
- ☐ POWDER COATED STEEL (CS)
- ☐ POWDER COATED ALUMINUM (AL)

- POWDERCOAT COLOR**
- ☐ STANDARD WHITE
- ☐ LIGHT GRAY ANSI 70
- ☐ DARK GRAY ANSI 61
- ☐ STANDARD BLACK
- ☐ CUSTOM _____

- BASE EXTENSION**
- ☐ 2" BASE EXTENSION
- ☐ 4" BASE EXTENSION
- ☐ 6" BASE EXTENSION
- ☐ 12" BASE EXTENSION
- ☐ NOT REQUIRED

- EXTERIOR MOUNTING**
- ☐ EXTERIOR MOUNTING BRACKETS (STANDARD)
- ☐ NOT REQUIRED

OPTIONAL
AIR
CONDITIONER
SEE (PAGE 5)

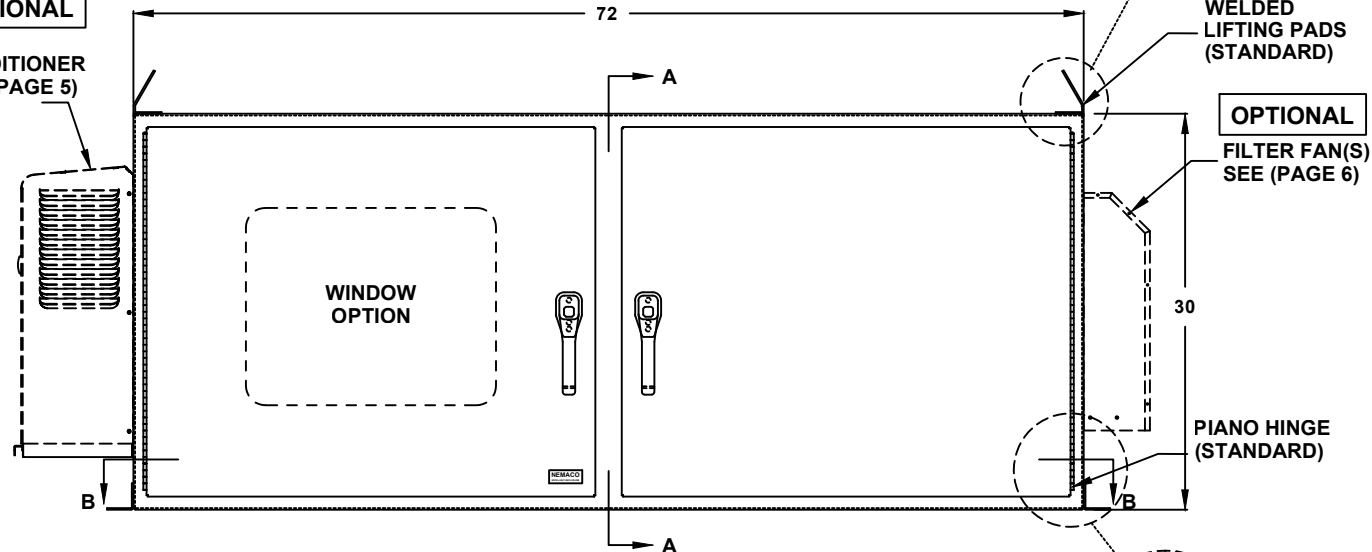

FRONT VIEW

ALL DIMENSIONS ARE ESTIMATED IN INCHES
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME

APPROVED (PRINTED NAME)

SIGNATURE

DATE

LIFTING EYE

- ☐ WELDED PADS (STANDARD)
- ☐ REMOVABLE PADEYES

DOOR HINGE

- ☐ PIANO HINGE (STANDARD)
- ☐ LIFT OFF HINGE

DOOR LATCH OPTIONS

- ☐ 3 PT. LATCH (STANDARD)
- ☐ CLAMP SCREW WITH HASP

*NOTE: UL & NON-UL OPTIONS
AVAILABLE

DOOR HANDLE

- ☐ PADLOCK PROVISION (STANDARD)
- ☐ KEYLOCK (OPTION)

***WINDOW OPTIONS**

- ☐ TEMPERED GLASS
- ☐ NOT REQUIRED


N4-307230-FSDDECXX (X1)

30" H x 72" W x 30" D
2 FRONT DOOR DESIGN


NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING



FILE NUMBER: E507642

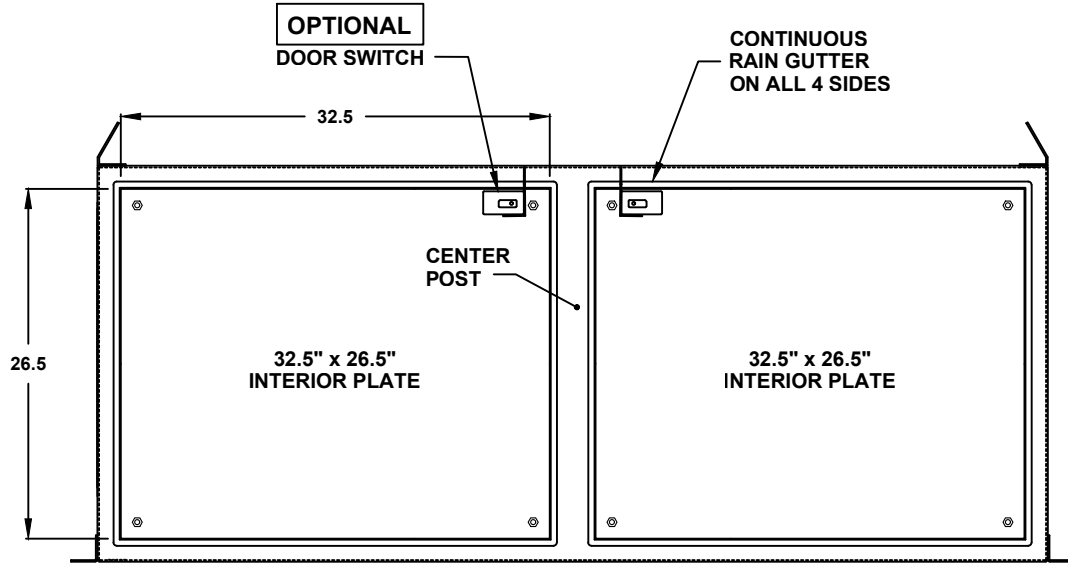

FRONT VIEW WITH DOOR REMOVED

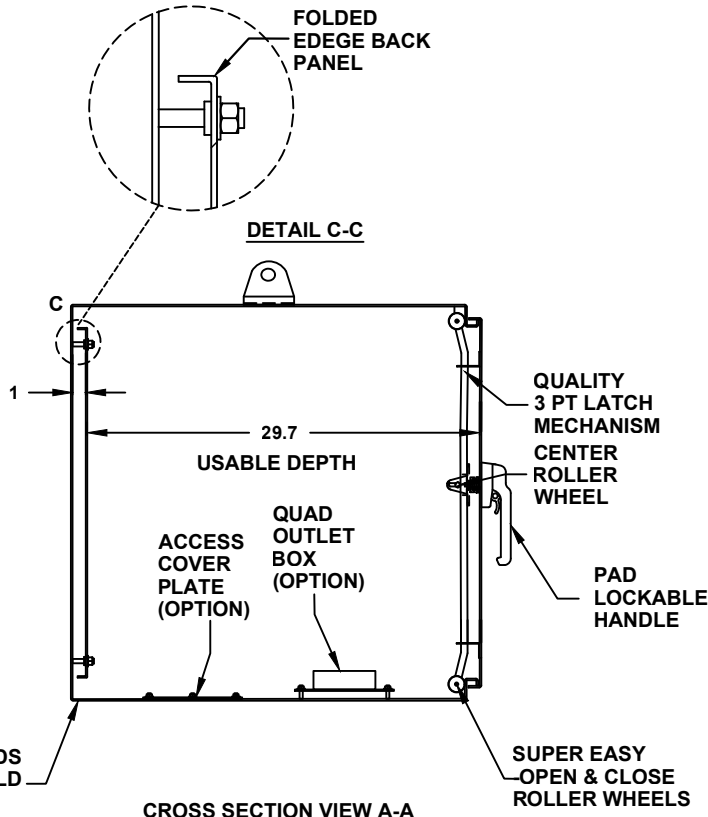

CROSS SECTION VIEW A-A

- | | | | | |
|---------------------------------------|---|---|---|--|
| DOOR OPTIONS | DOOR SWITCH OPTIONS | CENTER POST | BACK PANEL | BACK PANEL MATERIALS |
| ☐ DOOR SWITCH | ☐ 10A (STANDARD) | ☐ FIXED (STANDARD) | ☐ 2 BACK PANELS FIXED POST | ☐ COATED STEEL (IP3036-CS) |
| ☐ PRINT POCKET | ☐ 16A | ☐ REMOVABLE | ☐ 1 SINGLE BACK PANEL (REMOVABLE CENTER POST REQUIRED) | ☐ COATED ALUMINUM (IP3036-AL) |
| | | | | ☐ 304 STAINLESS STEEL (IP3036-S4) |
| | | | | ☐ 316 STAINLESS STEEL (IP3036-S6) |

N4-307230-FSDDECXX (X1)

30" H x 72" W x 30" D
2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING



FILE NUMBER: E507642

BASE ACCESS COVER PLATE
(OPTION)


- ☐ 8x8 PLATE (6x6 CUT-OUT)
- ☐ 8x16 PLATE (6x14 CUT-OUT)
- ☐ 12x12 PLATE (10x10 CUT-OUT)
- ☐ 16x16 PLATE (14x14 CUT-OUT)
- ☐ CUSTOM SIZE _____
- ☐ NOT REQUIRED

ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
- ☐ POWDER COATED ALUMINUM
- ☐ STAINLESS STEEL, 304

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION
- ☐ PIPE FITTING HUB
- ☐ CABLE GLAND

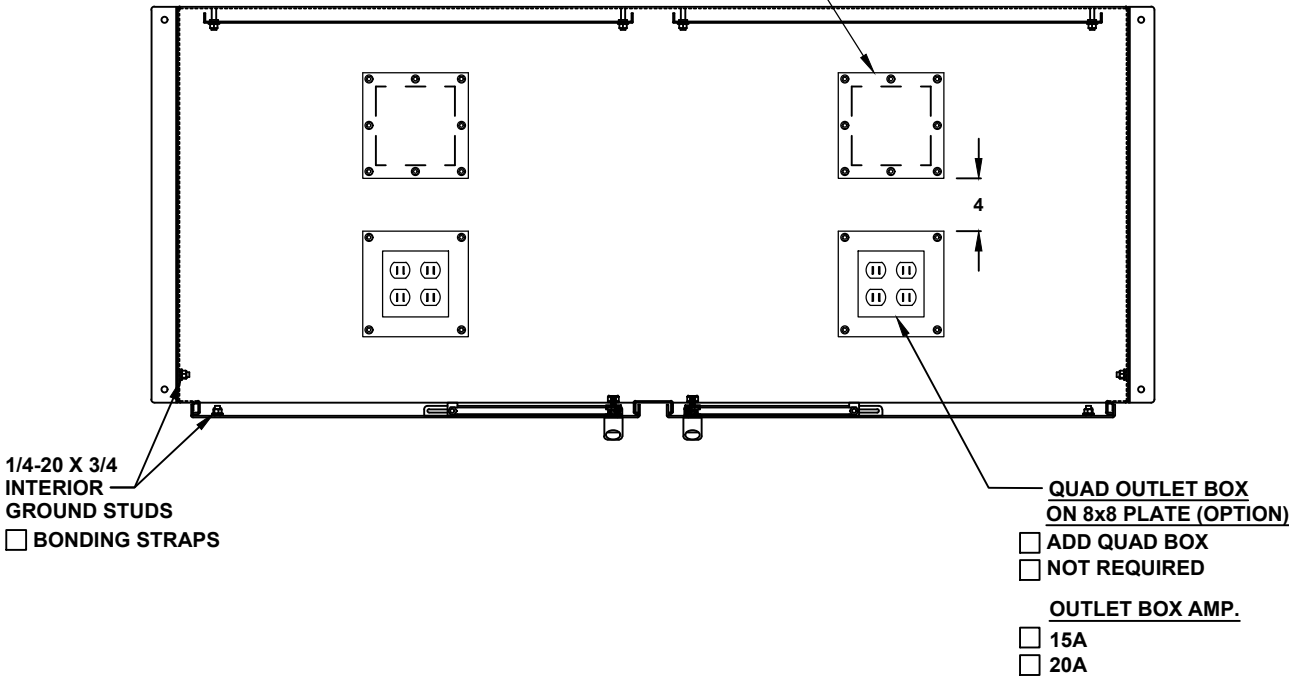

TOP CROSS SECTION VIEW B-B


30" H x 72" W x 30" D
2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING




FILE NUMBER: E507642

DOOR STOPPER
☐ INSTALL DOOR STOPPER
☐ NOT REQUIRED

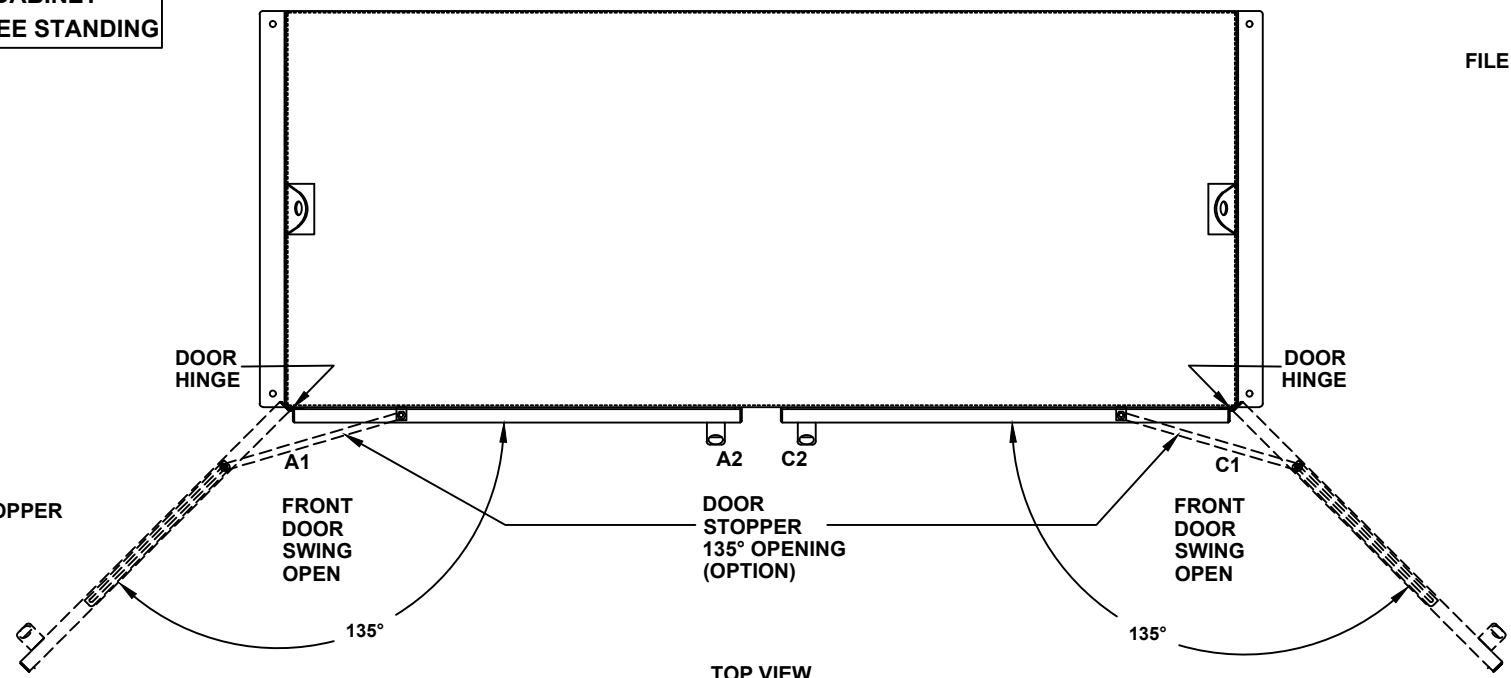

TOP VIEW

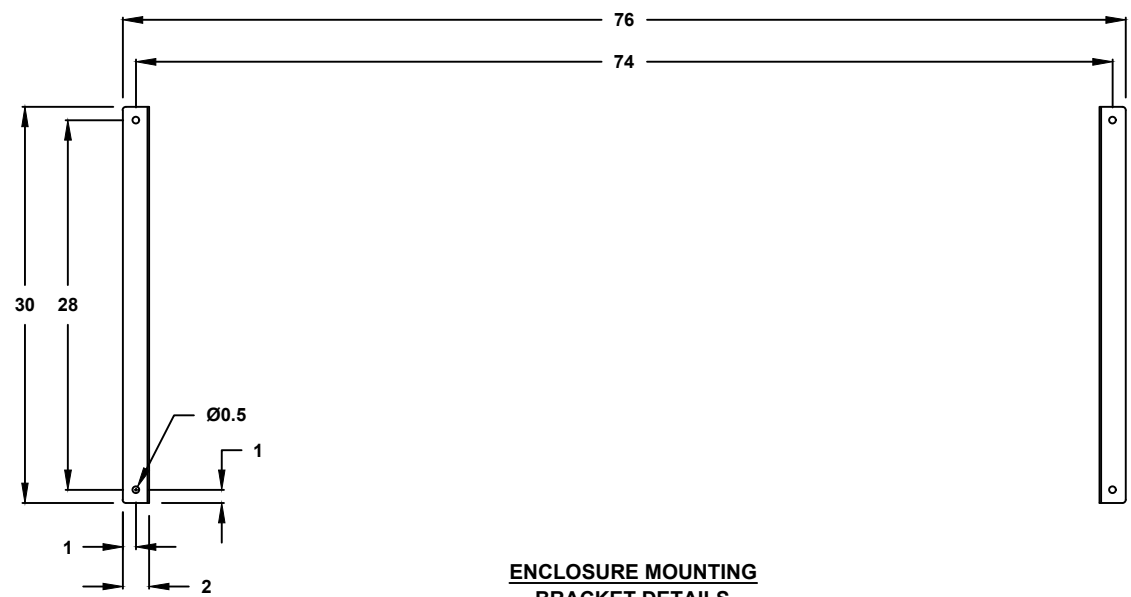

ENCLOSURE MOUNTING
BRACKET DETAILS

N4-307230-FSDDECXX (X1)

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING

30" H x 72" W x 30" D 2 FRONT DOOR DESIGN



FILE NUMBER: E507642

A/C UNIT AND SERVICE HATCH DOOR (OPTION)

AIR CONDITIONER

- ☐ 1000 BTU
☐ 1500 BTU
☐ 2000 BTU
☐ 3000 BTU
☐ 4000 BTU
☐ 5000 BTU
☐ 6000 BTU
☐ 8000 BTU
☐ SPECIFY _____
☐ NOT REQUIRED

A/C VOLTAGE/ HZ

- ☐ 115 VOLTS
☐ 230 VOLTS
☐ 480 VOLTS
☐ 60 HZ
☐ 50 HZ
☐ 48 VDC (CS011 A/C ONLY)

A/C INTEGRATED HEATER


- ☐ 350 WATTS (CS011 A/C ONLY)
☐ 500 WATTS
☐ 1000 WATTS
☐ EXTERNAL HEATER

ADDITIONAL A/C OPTIONS

- ☐ CORROSION PROTECTION PACKAGE
☐ DRY CONTACT (OUTPUT SIGNAL)
☐ 2" DEEP FILTERS
☐ PROXIMITY SWITCH (ON/OFF)

AIR CONDITIONER- SCADA

- ☐ MODBUS RTU 485 (2 WIRE)
 REMOTE NETWORK
 ETHERNET CONNECTION
☐ MODBUS GATEWAY
 ADD-ON

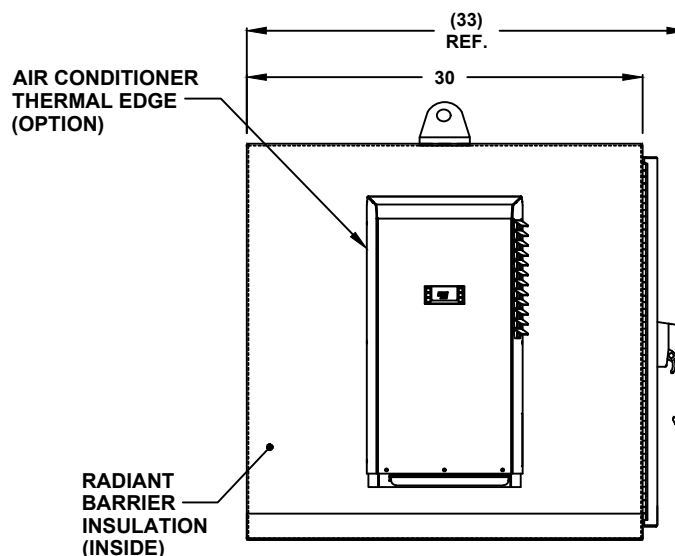

LEFT SIDE

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
☐ INTERIOR TEMP. _____ °F
☐ HEAT LOAD (WATTS) _____
☐ SUN / SHADE _____

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

N4-307230-FSDDECXX (X1)


30" H x 72" W x 30" D
2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING




FILE NUMBER: E507642

FILTERED FAN
SYSTEM (OPTION)

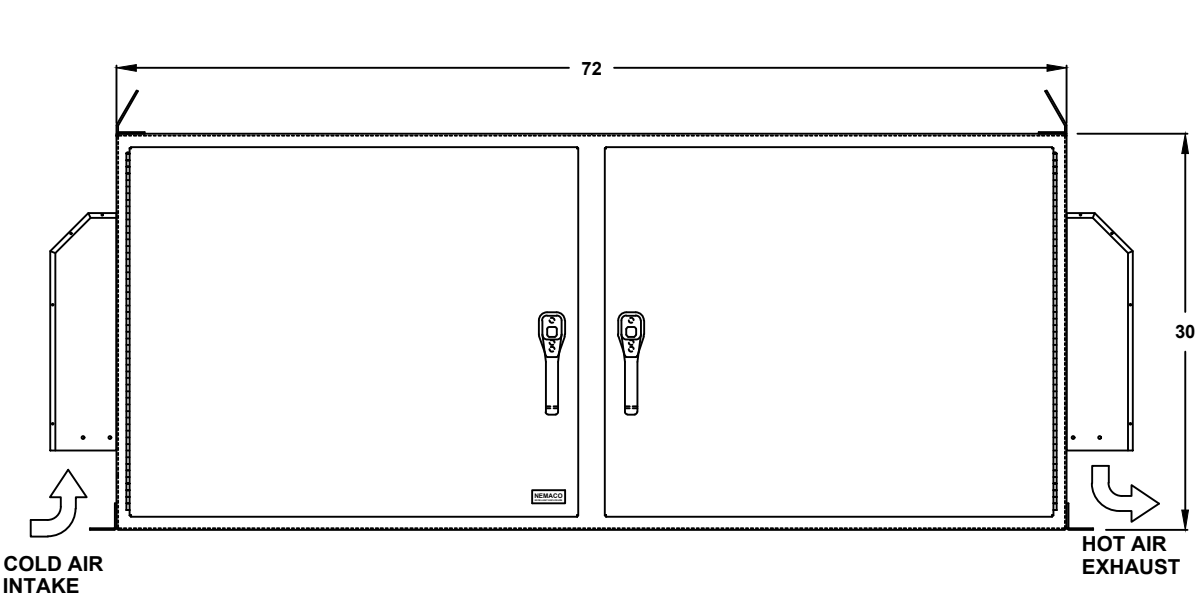

FRONT VIEW

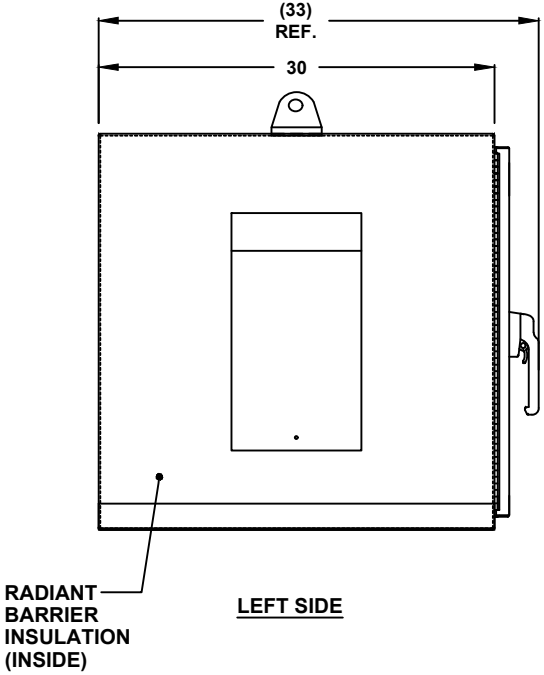

LEFT SIDE

- THERMAL SPECIFICATIONS**

 - ☐ OUTSIDE (AMBIENT) _____ °F
 - ☐ INTERIOR TEMP. _____ °F
 - ☐ HEAT LOAD (WATTS) _____
 - ☐ SUN / SHADE _____

FAN SYSTEM

 - ☐ PUSH-PULL SYSTEM (STANDARD)
 - ☐ PUSH SYSTEM
 - ☐ PULL SYSTEM
 - ☐ NOT REQUIRED
- FAN SERIES**

 - ☐ 60FL SERIES, 18" H (40-92 CFM)
 - ☐ 180FL SERIES, 24"H (177-179 CFM)
 - ☐ 225FL SERIES, 24"H (350 CFM)

FAN MATERIALS

 - ☐ BAKED POWDER STEEL
 - ☐ STAINLESS STEEL
- FAN VOLTAGE/ HZ**

 - ☐ 115/60 (STANDARD)
 - ☐ 230/60
 - ☐ 12 VDC
 - ☐ 24 VDC
 - ☐ 48 VDC
 - ☐ SPECIFY _____
- ACCESSORIES AND OPTIONS**

 - ☐ REPLACEMENT FILTER

SUN REFLECTIVE SOLUTION

 - ☐ TOP SUNSHIELD COVER
- ENCLOSURE INSULATION**

 - ☐ 1/2 RADIANT BARRIER (STANDARD)
 - ☐ 3/4 RADIANT BARRIER
 - ☐ 1 RADIANT BARRIER
 - ☐ NOT REQUIRED

N4-307230-FSDDECXX (X1)