

72" H x 72" W x 12" D 2 FRONT DOOR DESIGN

OPTIONAL
REMOVABLE
LIFTING PAD-EYES



FILE NUMBER: E507642

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING

ENCLOSURE MATERIAL

- ☐ POWDER COATED STEEL (CS)
☐ POWDER COATED ALUMINUM (AL)

POWDERCOAT COLOR

- ☐ STANDARD WHITE
☐ LIGHT GRAY ANSI 70
☐ DARK GRAY ANSI 61
☐ STANDARD BLACK
☐ CUSTOM _____

BASE EXTENSION

- ☐ 2" BASE EXTENSION
☐ 4" BASE EXTENSION
☐ 6" BASE EXTENSION
☐ 12" BASE EXTENSION
☐ NOT REQUIRED

EXTERIOR MOUNTING

- ☐ EXTERIOR MOUNTING
BRACKETS (STANDARD)
☐ NOT REQUIRED

OPTIONAL

AIR CONDITIONER
SEE (PAGE 5)

OPTIONAL

A/C HATCH
DOOR

WINDOW
OPTION

WELDED
LIFTING PADS
(STANDARD)

OPTIONAL

FILTER FAN(S)
SEE (PAGE 6)

PIANO HINGE
(STANDARD)

OPTIONAL

LIFT OFF HINGE

ALL DIMENSIONS ARE ESTIMATED IN INCHES
AND MAY VARY DUE TO SELECTED OPTIONS.

LIFTING EYE

- ☐ WELDED PADS (STANDARD)
☐ REMOVABLE PADEYES

DOOR HINGE

- ☐ PIANO HINGE (STANDARD)
☐ LIFT OFF HINGE

DOOR LATCH OPTIONS

- ☐ 3 PT. LATCH (STANDARD)
☐ CLAMP SCREW WITH HASP

*NOTE: UL & NON-UL OPTIONS
AVAILABLE

DOOR HANDLE

- ☐ PADLOCK PROVISION
(STANDARD)
☐ KEYLOCK (OPTION)

***WINDOW OPTIONS**


- ☐ TEMPERED GLASS
☐ NOT REQUIRED

N4-727212-FSDDECXX (X1)

72" H x 72" W x 12" D
2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING

- DOOR OPTIONS**
- ☐ DOOR SWITCH
 - ☐ PRINT POCKET
- DOOR SWITCH OPTIONS**
- ☐ 10A (STANDARD)
 - ☐ 16A
- CENTER POST**
- ☐ FIXED (STANDARD)
 - ☐ REMOVABLE
- BACK PANEL**
- ☐ 2 BACK PANELS FIXED POST
 - ☐ 1 SINGLE BACK PANEL (REMOVEABLE CENTER POST REQUIRED)
- BACK PANEL MATERIALS**
- ☐ COATED STEEL (IP7236-CS)
 - ☐ COATED ALUMINUM (IP7236-AL)
 - ☐ 304 STAINLESS STEEL (IP7236-S4)
 - ☐ 316 STAINLESS STEEL (IP7236-S6)

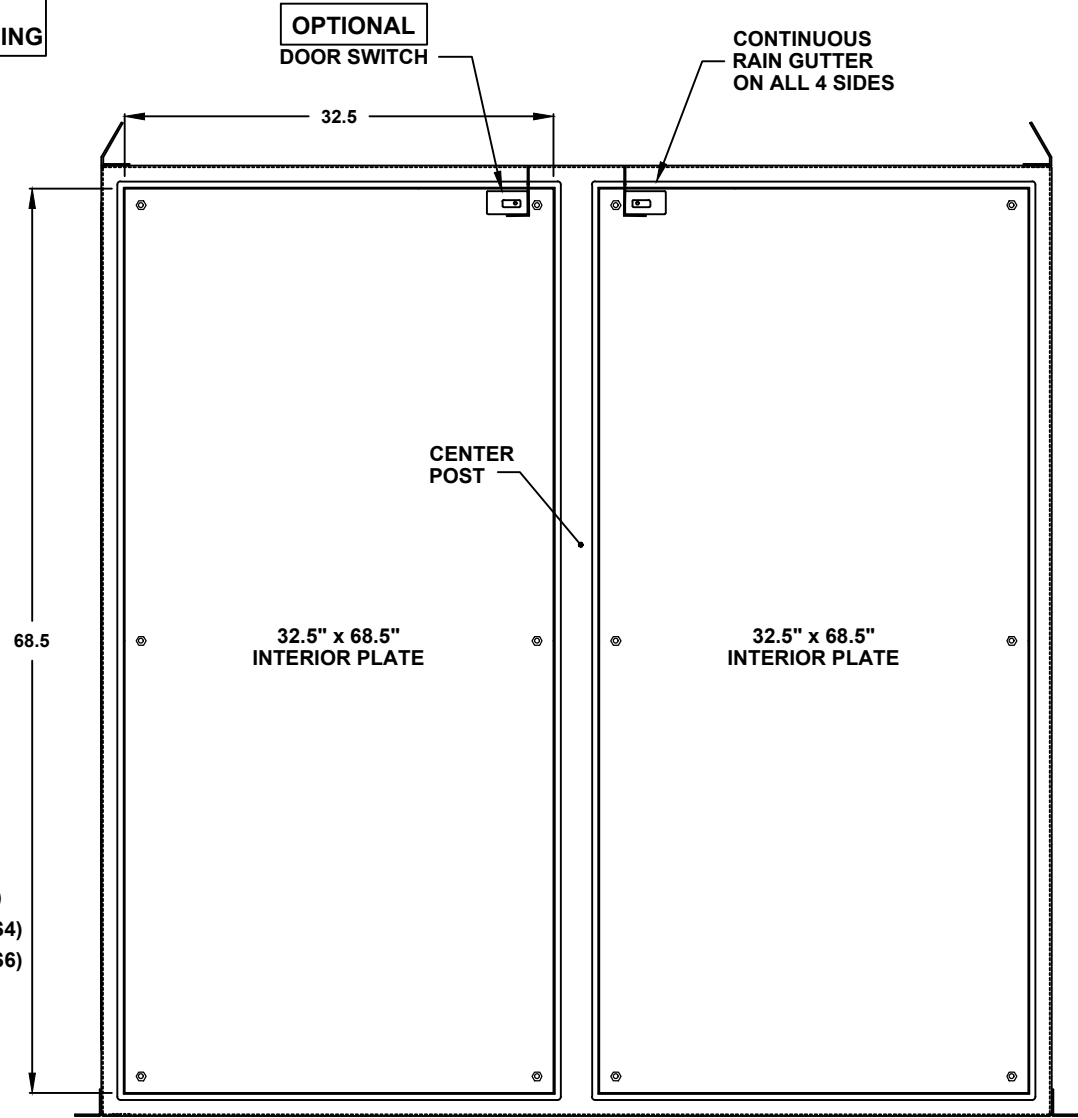


FRONT VIEW WITH DOOR REMOVED

FOLDED EDGE BACK PANEL

UL LISTED

FILE NUMBER: E507642

DETAIL C-C

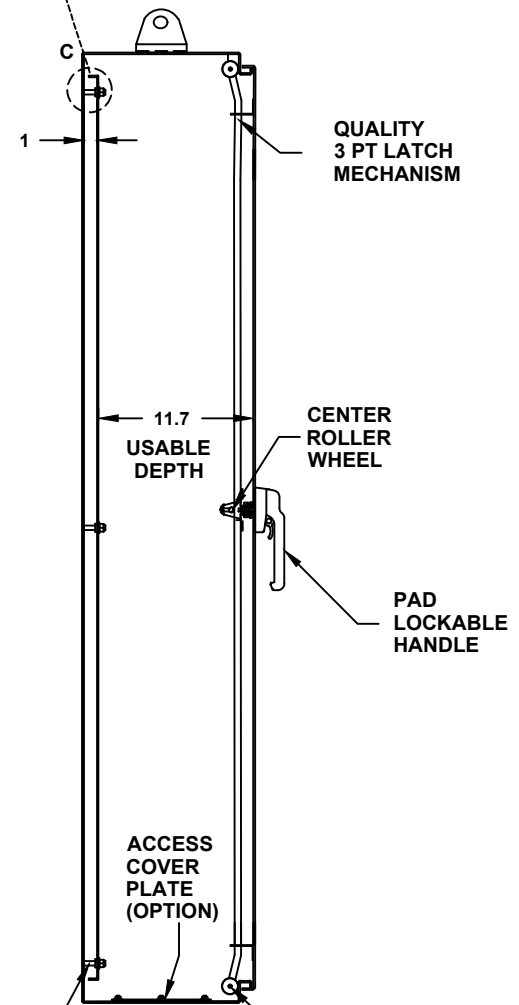

CROSS SECTION VIEW A-A

N4-727212-FSDDECXX (X1)

72" H x 72" W x 12" D
2 FRONT DOOR DESIGN

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING



FILE NUMBER: E507642

BASE ACCESS COVER PLATE
(OPTION)


- ☐ 8x8 PLATE (6x6 CUT-OUT)
- ☐ 8x16 PLATE (6x14 CUT-OUT)
- ☐ 12x12 PLATE (10x10 CUT-OUT)
- ☐ 16x16 PLATE (14x14 CUT-OUT)
- ☐ CUSTOM SIZE _____
- ☐ NOT REQUIRED

ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
- ☐ POWDER COATED ALUMINUM
- ☐ STAINLESS STEEL, 304

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION
- ☐ PIPE FITTING HUB
- ☐ CABLE GLAND

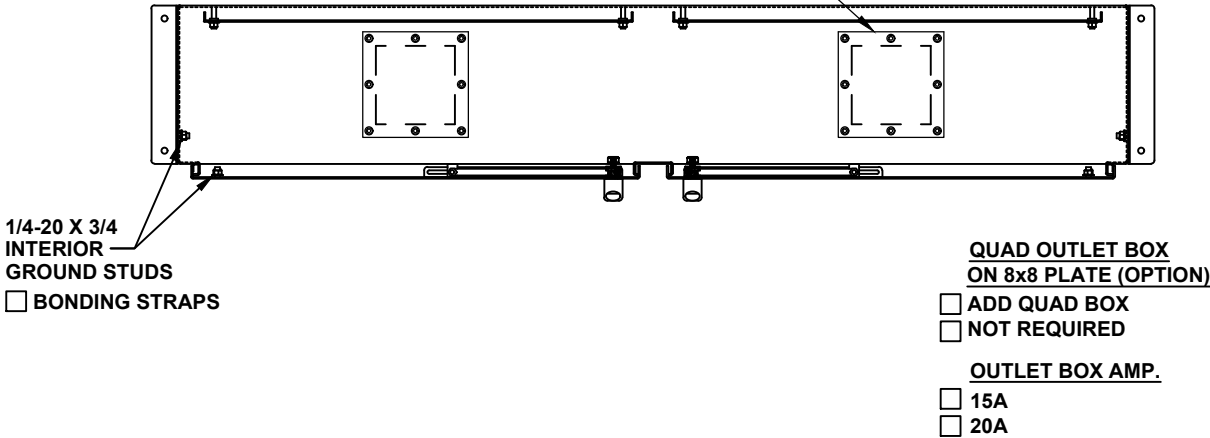


TOP CROSS SECTION VIEW B-B

72" H x 72" W x 12" D
2 FRONT DOOR DESIGN


NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING



FILE NUMBER: E507642

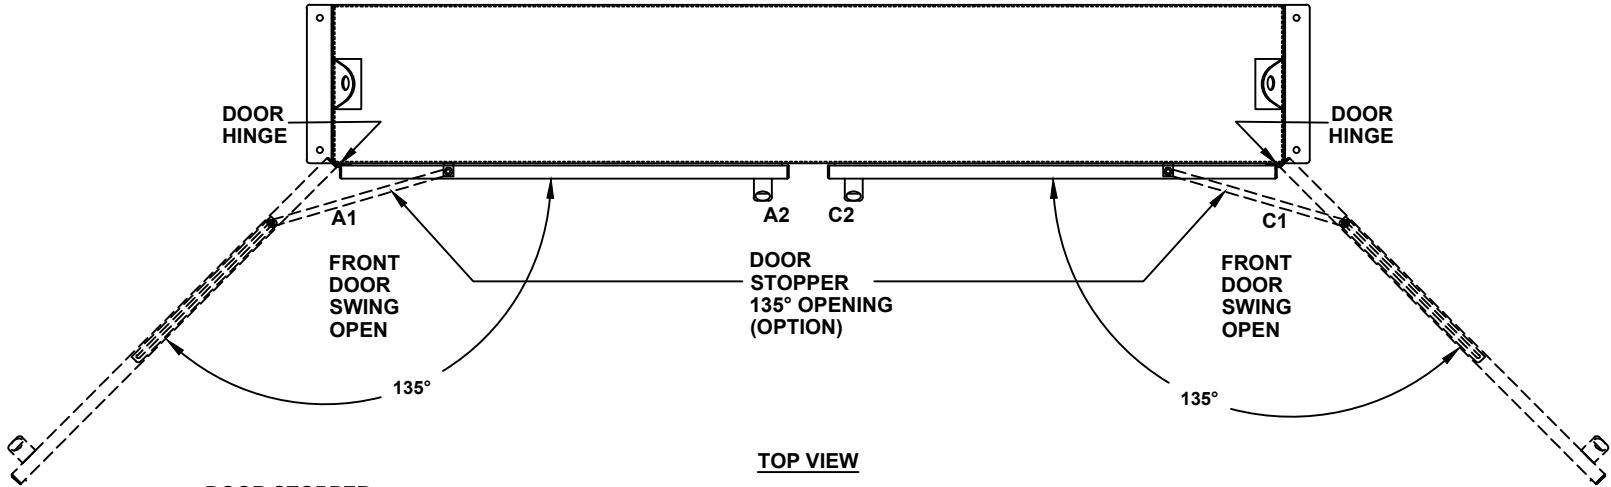

- DOOR STOPPER
- ☐ INSTALL DOOR STOPPER
 - ☐ NOT REQUIRED

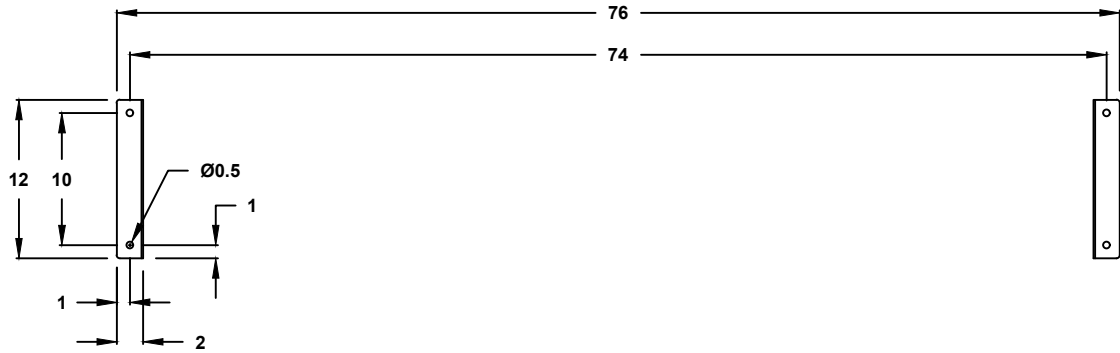

ENCLOSURE MOUNTING
BRACKET DETAILS

N4-727212-FSDDECXX (X1)

NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING

72" H x 72" W x 12" D 2 FRONT DOOR DESIGN



FILE NUMBER: E507642

A/C UNIT AND SERVICE HATCH DOOR (OPTION)

AIR CONDITIONER

- ☐ 1000 BTU
☐ 1500 BTU
☐ 2000 BTU
☐ 3000 BTU
☐ 4000 BTU
☐ 5000 BTU
☐ 6000 BTU
☐ 8000 BTU
☐ SPECIFY _____
☐ NOT REQUIRED

A/C VOLTAGE/ HZ

- ☐ 115 VOLTS
☐ 230 VOLTS
☐ 480 VOLTS
☐ 60 HZ
☐ 50 HZ
☐ 48 VDC (CS011 A/C ONLY)

A/C INTEGRATED HEATER

- ☐ 350 WATTS (CS011 A/C ONLY)
☐ 500 WATTS
☐ 1000 WATTS
☐ EXTERNAL HEATER

ADDITIONAL A/C OPTIONS

- ☐ CORROSION PROTECTION PACKAGE
☐ DRY CONTACT (OUTPUT SIGNAL)
☐ 2" DEEP FILTERS
☐ PROXIMITY SWITCH (ON/OFF)

AIR CONDITIONER- SCADA

- ☐ MODBUS RTU 485 (2 WIRE)
 REMOTE NETWORK
 ETHERNET CONNECTION
☐ MODBUS GATEWAY
 ADD-ON

SUN REFLECTIVE SOLUTION


- ☐ TOP SUNSHIELD COVER

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
☐ INTERIOR TEMP. _____ °F
☐ HEAT LOAD (WATTS) _____
☐ SUN / SHADE _____

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

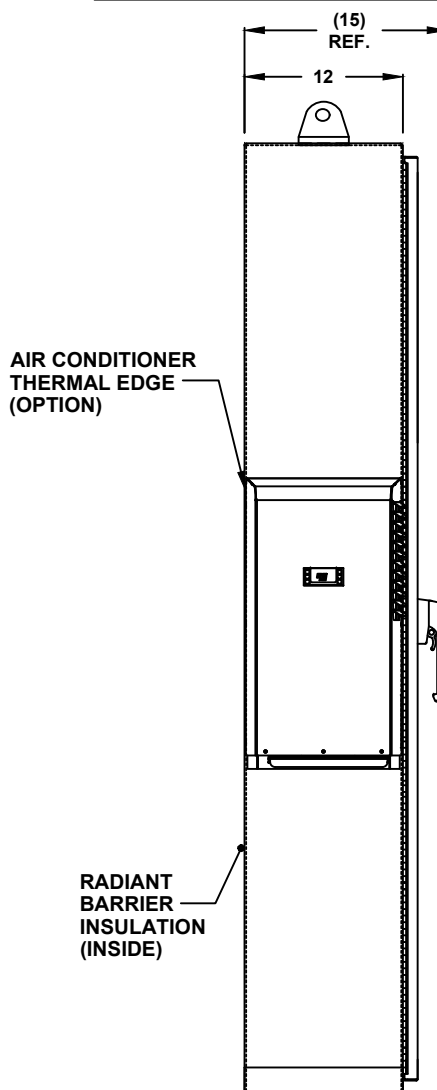

LEFT SIDE

N4-727212-FSDDECXX (X1)

72" H x 72" W x 12" D
2 FRONT DOOR DESIGN


NEMA 4/12 - ENCLOSURE
ELECTRICAL CABINET
DOUBLE WIDE FREE STANDING

FILTERED FAN
SYSTEM (OPTION)




FILE NUMBER: E507642

- THERMAL SPECIFICATIONS**
- ☐ OUTSIDE (AMBIENT) _____ °F
 - ☐ INTERIOR TEMP. _____ °F
 - ☐ HEAT LOAD (WATTS) _____
 - ☐ SUN / SHADE _____
- FAN SYSTEM**
- ☐ PUSH-PULL SYSTEM (STANDARD)
 - ☐ PUSH SYSTEM
 - ☐ PULL SYSTEM
 - ☐ NOT REQUIRED
- FAN SERIES**
- ☐ 60FL SERIES, 18" H (40-92 CFM)
 - ☐ 180FL SERIES, 24"H (177-179 CFM)
 - ☐ 225FL SERIES, 24"H (350 CFM)
- FAN MATERIALS**
- ☐ BAKED POWDER STEEL
 - ☐ STAINLESS STEEL
- FAN VOLTAGE/ HZ**
- ☐ 115/60 (STANDARD)
 - ☐ 230/60
 - ☐ 12 VDC
 - ☐ 24 VDC
 - ☐ 48 VDC
 - ☐ SPECIFY _____
- ACCESSORIES AND OPTIONS**
- ☐ REPLACEMENT FILTER
- SUN REFLECTIVE SOLUTION**
- ☐ TOP SUNSHIELD COVER
- ENCLOSURE INSULATION**
- ☐ 1/2 RADIANT BARRIER (STANDARD)
 - ☐ 3/4 RADIANT BARRIER
 - ☐ 1 RADIANT BARRIER
 - ☐ NOT REQUIRED

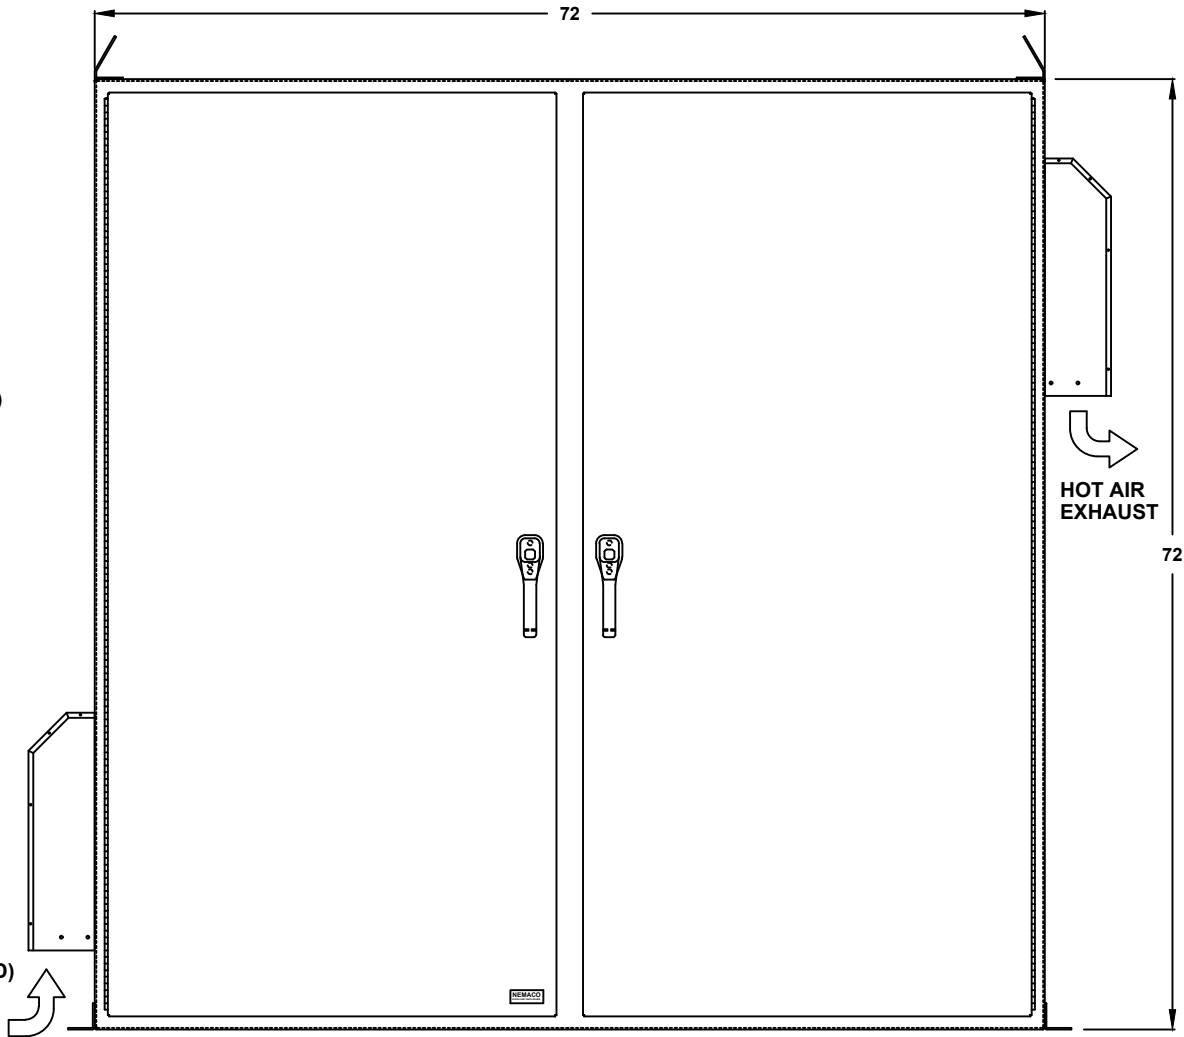

FRONT VIEW

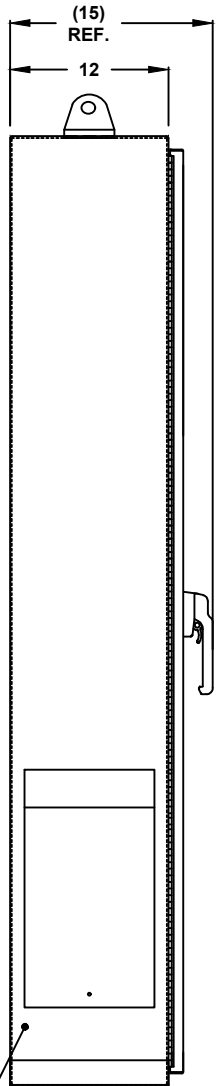

RADIANT BARRIER INSULATION (INSIDE)
LEFT SIDE
N4-727212-FSDDECXX (X1)