

NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
DOUBLE WIDE FREE STANDING

## STAINLESS STEEL

# 42" H x 72" W x 12" D 2 FRONT DOOR DESIGN



FILE NUMBER: E507642

- ENCLOSURE MATERIAL**
- ☐ 304 STAINLESS STEEL (S4)
- ☐ 316 STAINLESS STEEL (S6)

- CORROSION PROTECTION PACKAGE**
- ☐ EXTERIOR PASSIVATION (STANDARD)
- ☐ INTERIOR/EXTERIOR PASSIVATION (OPTION)
- ☐ NOT REQUIRED (ON REQUEST ONLY)

- POWDERCOAT COLOR**
- ☐ STANDARD WHITE
- ☐ LIGHT GRAY ANSI 70
- ☐ DARK GRAY ANSI 61
- ☐ STANDARD BLACK
- ☐ CUSTOM \_\_\_\_\_

- BASE EXTENSION**
- ☐ 2" BASE EXTENSION
- ☐ 4" BASE EXTENSION
- ☐ 6" BASE EXTENSION
- ☐ 12" BASE EXTENSION
- ☐ NOT REQUIRED

- EXTERIOR MOUNTING**
- ☐ EXTERIOR MOUNTING BRACKETS (STANDARD)
- ☐ NOT REQUIRED


**OPTIONAL**

AIR  
CONDITIONER  
SEE (PAGE 5)



WINDOW  
OPTION

**OPTIONAL**  
REMOVABLE  
LIFTING PAD-EYES




WELDED  
LIFTING PADS  
(STANDARD)

**OPTIONAL**  
FILTER FAN(S)  
SEE (PAGE 6)

PIANO HINGE  
(STANDARD)

**OPTIONAL**  
LIFT OFF HINGE



### FRONT VIEW

#### LIFTING EYE

- ☐ WELDED PADS (STANDARD)
- ☐ REMOVABLE PADEYES

#### DOOR LATCH OPTIONS

- ☐ 3 PT. LATCH (STANDARD)
- ☐ CLAMP SCREW WITH HASP

#### \*WINDOW OPTIONS

- ☐ TEMPERED GLASS
- ☐ NOT REQUIRED

#### DOOR HINGE

- ☐ PIANO HINGE (STANDARD)
- ☐ LIFT OFF HINGE

#### DOOR HANDLE

- ☐ PADLOCK PROVISION (STANDARD)
- ☐ KEYLOCK (OPTION)

\*NOTE: UL & NON-UL OPTIONS  
AVAILABLE

ALL DIMENSIONS ARE ESTIMATED IN INCHES  
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME

APPROVED (PRINTED NAME)

SIGNATURE

DATE



N4X427212-FSDDECXX (X1)

NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
DOUBLE WIDE FREE STANDING

## 42" H x 72" W x 12" D 2 FRONT DOOR DESIGN



FOLDED FILE NUMBER: E507642  
EDGE BACK  
PANEL

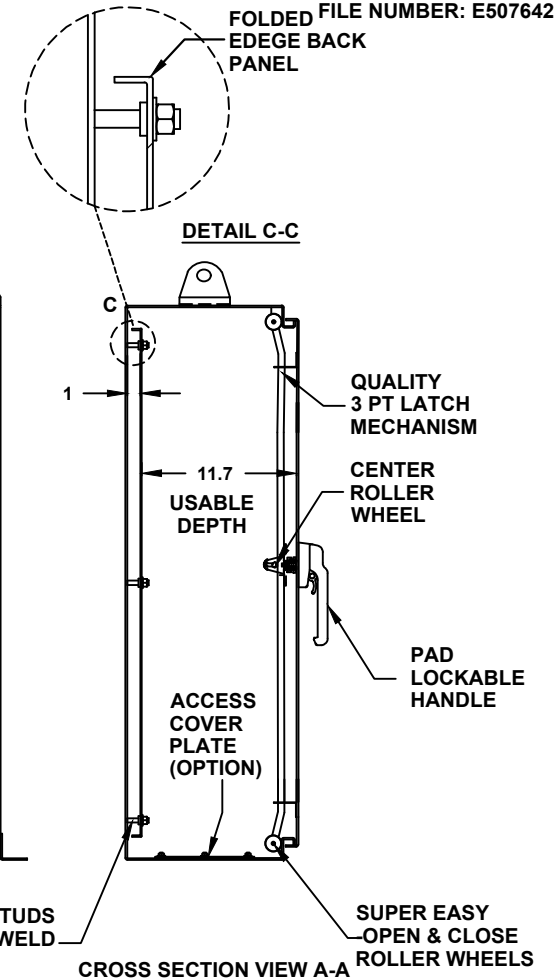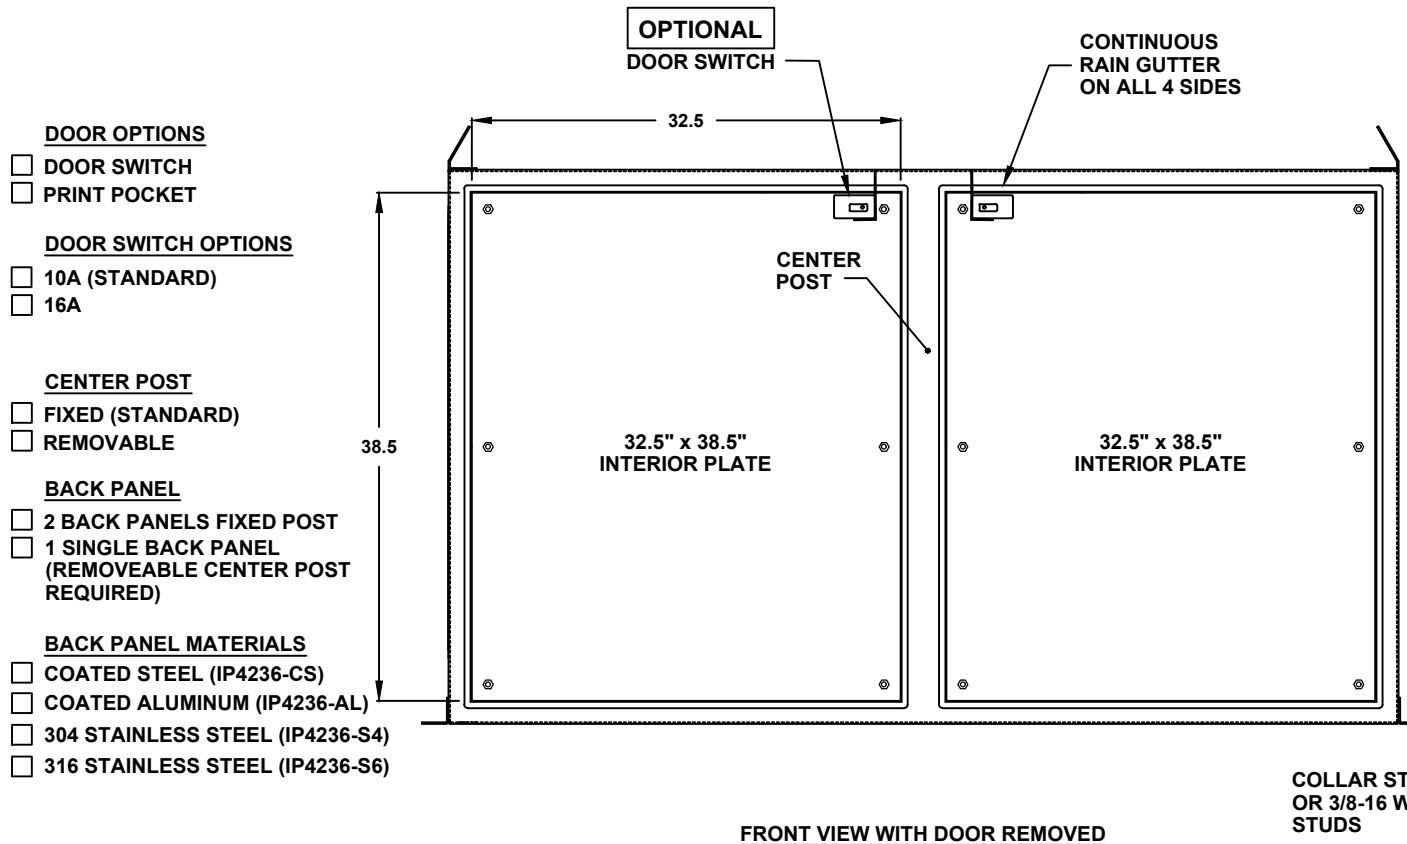

N4X427212-FSDDECXX (X1)

42" H x 72" W x 12" D  
2 FRONT DOOR DESIGN

NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
DOUBLE WIDE FREE STANDING



FILE NUMBER: E507642

BASE ACCESS COVER PLATE  
(OPTION)


- ☐ 8x8 PLATE (6x6 CUT-OUT)
- ☐ 8x16 PLATE (6x14 CUT-OUT)
- ☐ 12x12 PLATE (10x10 CUT-OUT)
- ☐ 16x16 PLATE (14x14 CUT-OUT)
- ☐ CUSTOM SIZE \_\_\_\_\_
- ☐ NOT REQUIRED

ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
- ☐ POWDER COATED ALUMINUM
- ☐ STAINLESS STEEL, 304

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION
- ☐ PIPE FITTING HUB
- ☐ CABLE GLAND

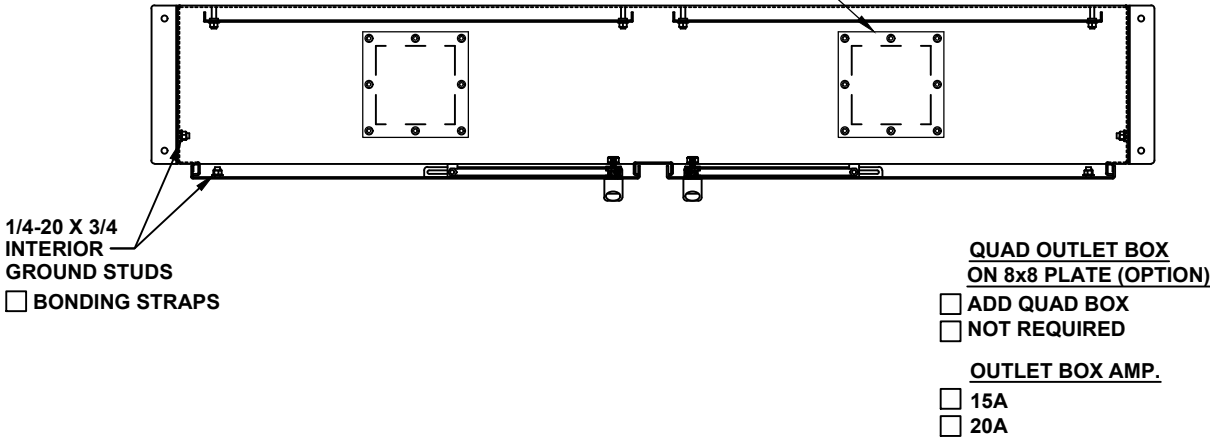


TOP CROSS SECTION VIEW B-B

42" H x 72" W x 12" D  
2 FRONT DOOR DESIGN

NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
DOUBLE WIDE FREE STANDING




FILE NUMBER: E507642

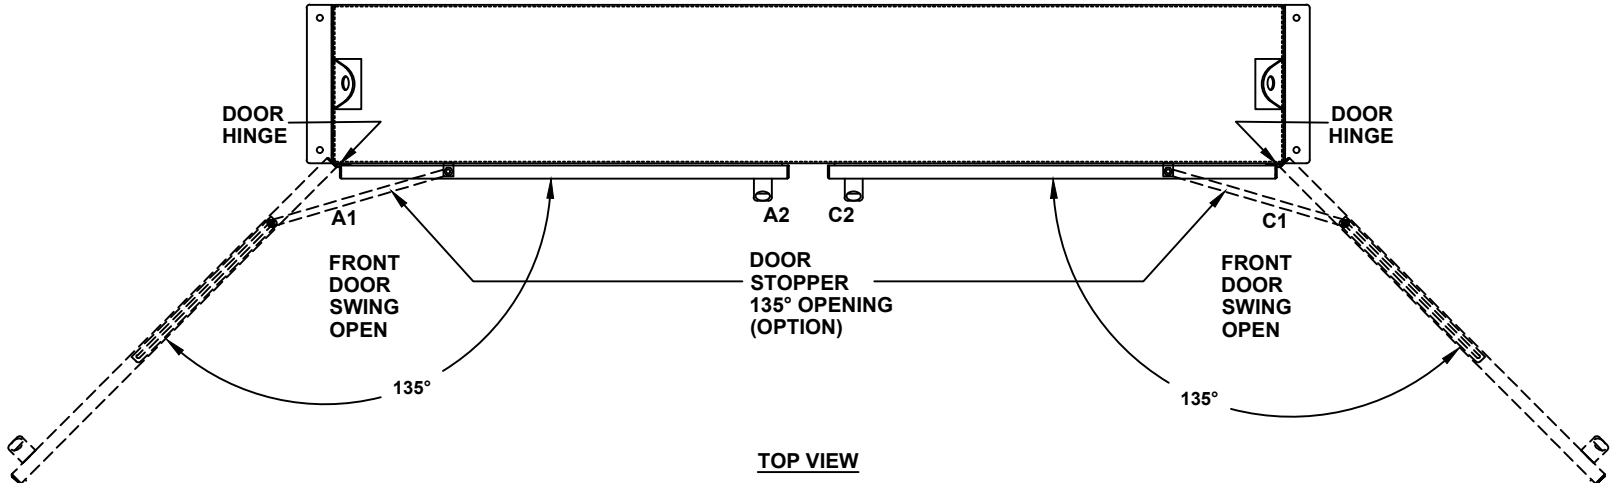

TOP VIEW

- DOOR STOPPER
- ☐ INSTALL DOOR STOPPER
  - ☐ NOT REQUIRED

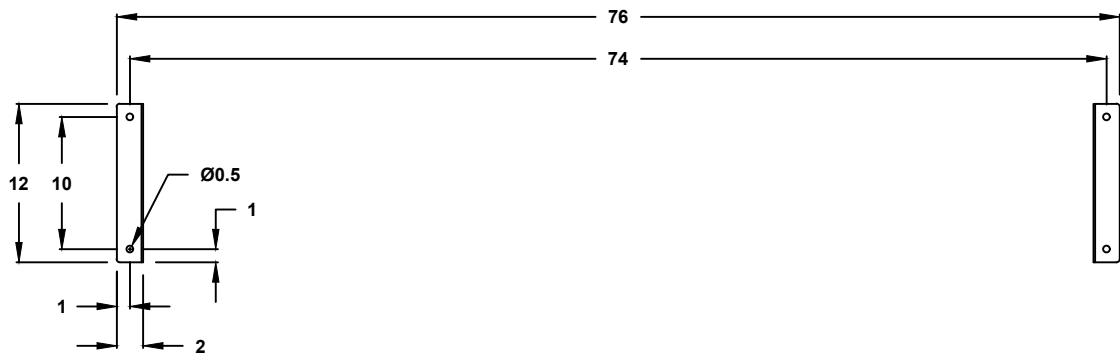

ENCLOSURE MOUNTING  
BRACKET DETAILS

N4X427212-FSDDECXX (X1)

**NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
DOUBLE WIDE FREE STANDING**

**42" H x 72" W x 12" D  
2 FRONT DOOR DESIGN**



FILE NUMBER: E507642

**A/C UNIT AND SERVICE  
HATCH DOOR (OPTION)**

A/C MATERIAL (EXTERIOR)

- ☐ 304 STAINLESS STEEL  
☐ 316 STAINLESS STEEL  
☐ OTHER \_\_\_\_\_

AIR CONDITIONER

- ☐ 1000 BTU  
☐ 1500 BTU  
☐ 2000 BTU  
☐ 3000 BTU  
☐ 4000 BTU  
☐ 5000 BTU  
☐ 6000 BTU  
☐ 8000 BTU  
☐ SPECIFY \_\_\_\_\_  
☐ NOT REQUIRED

A/C VOLTAGE/ HZ

- ☐ 115 VOLTS  
☐ 230 VOLTS  
☐ 480 VOLTS  
☐ 60 HZ  
☐ 50 HZ  
☐ 48 VDC (CS011 A/C ONLY)

A/C INTEGRATED HEATER


- ☐ 350 WATTS (CS011 A/C ONLY)  
☐ 500 WATTS  
☐ 1000 WATTS  
☐ EXTERNAL HEATER

ADDITIONAL A/C OPTIONS

- ☐ CORROSION PROTECTION PACKAGE  
☐ DRY CONTACT (OUTPUT SIGNAL)  
☐ 2" DEEP FILTERS  
☐ PROXIMITY SWITCH (ON/OFF)

AIR CONDITIONER- SCADA

- ☐ MODBUS RTU 485 (2 WIRE)  
 REMOTE NETWORK  
 ETHERNET CONNECTION  
☐ MODBUS GATEWAY  
 ADD-ON

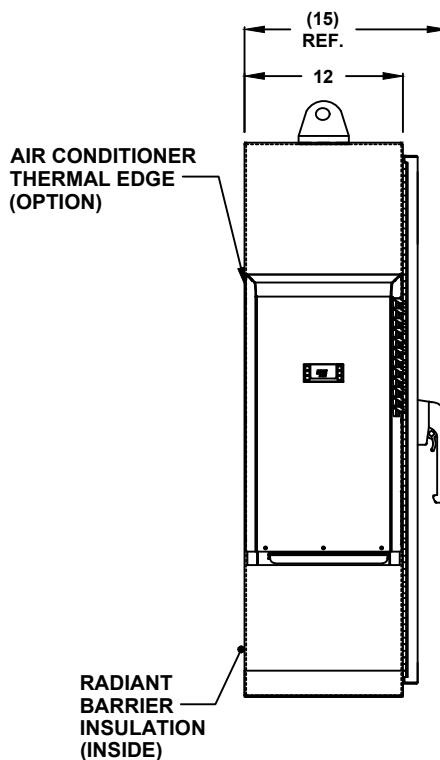SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) \_\_\_\_\_ °F  
☐ INTERIOR TEMP. \_\_\_\_\_ °F  
☐ HEAT LOAD (WATTS) \_\_\_\_\_  
☐ SUN / SHADE \_\_\_\_\_

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)  
☐ 3/4 RADIANT BARRIER  
☐ 1 RADIANT BARRIER  
☐ NOT REQUIRED

N4X427212-FSDDECXX (X1)

42" H x 72" W x 12" D  
2 FRONT DOOR DESIGN


NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
DOUBLE WIDE FREE STANDING



FILE NUMBER: E507642

FILTERED FAN  
SYSTEM (OPTION)

- THERMAL SPECIFICATIONS**
- ☐ OUTSIDE (AMBIENT) \_\_\_\_\_ °F
  - ☐ INTERIOR TEMP. \_\_\_\_\_ °F
  - ☐ HEAT LOAD (WATTS) \_\_\_\_\_
  - ☐ SUN / SHADE \_\_\_\_\_
- FAN SYSTEM**
- ☐ PUSH-PULL SYSTEM (STANDARD)
  - ☐ PUSH SYSTEM
  - ☐ PULL SYSTEM
  - ☐ NOT REQUIRED
- FAN SERIES**
- ☐ 60FL SERIES, 18" H (40-92 CFM)
  - ☐ 180FL SERIES, 24" H (177-179 CFM)
  - ☐ 225FL SERIES, 24" H (350 CFM)
- FAN MATERIALS**
- ☐ BAKED POWDER STEEL
  - ☐ STAINLESS STEEL
- FAN VOLTAGE/ HZ**
- ☐ 115/60 (STANDARD)
  - ☐ 230/60
  - ☐ 12 VDC
  - ☐ 24 VDC
  - ☐ 48 VDC
  - ☐ SPECIFY \_\_\_\_\_
- ACCESSORIES AND OPTIONS**
- ☐ REPLACEMENT FILTER
- SUN REFLECTIVE SOLUTION**
- ☐ TOP SUNSHIELD COVER
- ENCLOSURE INSULATION**
- ☐ 1/2 RADIANT BARRIER (STANDARD)
  - ☐ 3/4 RADIANT BARRIER
  - ☐ 1 RADIANT BARRIER
  - ☐ NOT REQUIRED

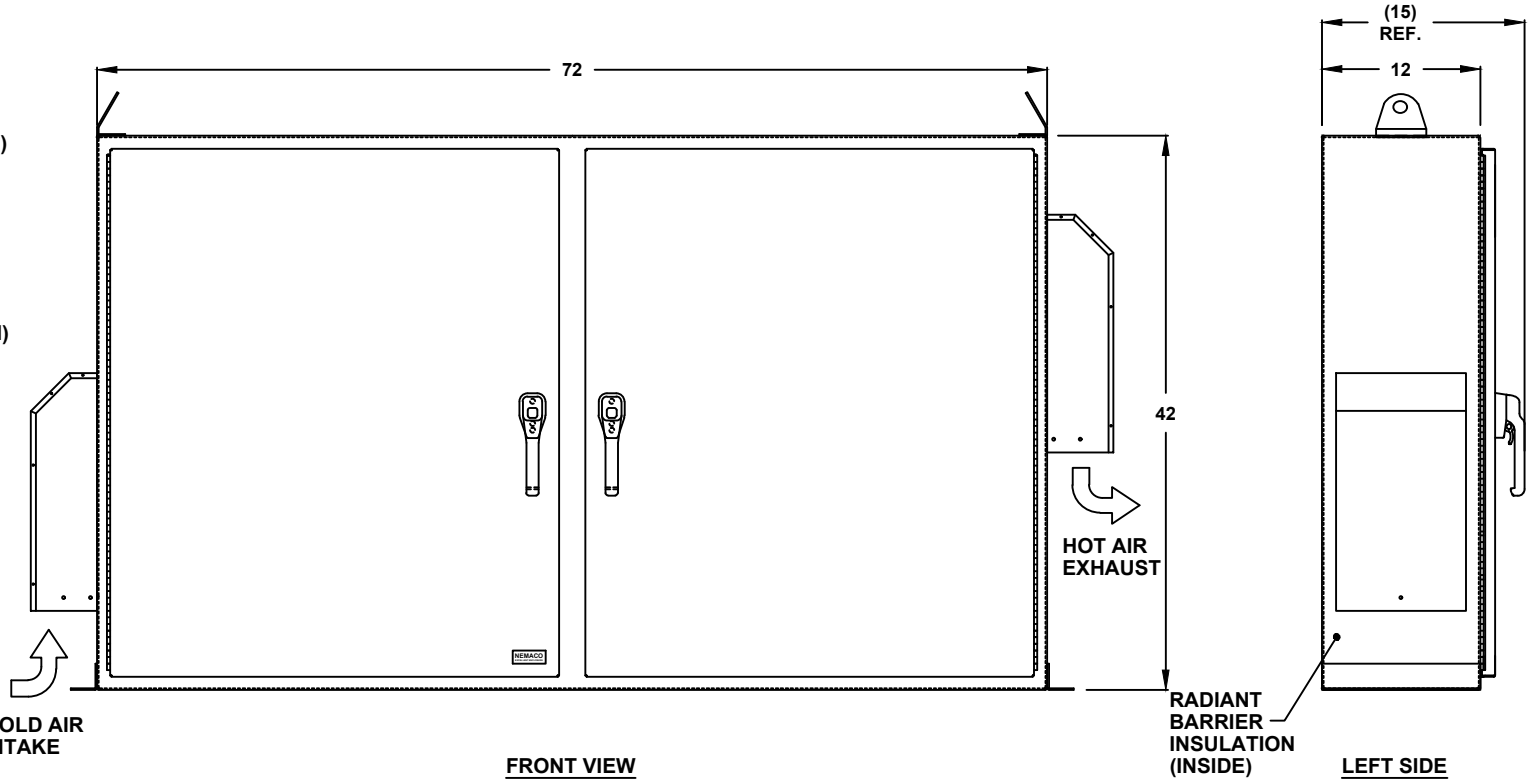

N4X427212-FSDDECXX (X1)