

Single Bay Wall Mount 19" EIA Server Rack Cabinet

SERVERPRO™ 4X SERIES

IP66

NEMA 4X

Applications

NEMACO™'s NEMA 4X stainless steel wall and pole mount 19" rack enclosures are built for corrosive environments where floor space is unavailable or elevated positioning is operationally required. Folded "Z" offset brackets are standard on both sides for direct attachment to walls, structural columns, and utility poles. Wall tabs are standard on front-door enclosures for additional anchoring stability. Available in 304 and 316L stainless steel, these enclosures are suited for coastal installations, chemical processing facilities, wastewater treatment plants, food and beverage production environments, and any outdoor deployment where salt air, chemical wash, or persistent moisture demands more than a powder-coated enclosure can provide.

These enclosures are deployed across telecom, security, surveillance, radar, SCADA and process control networks, electronic power plants, and data acquisition systems for commercial and military applications. Space for uninterruptible power supplies and power distribution units is accommodated within the standard rack configuration, reducing the need for supplementary enclosures at the installation site.

Industry Standard

- UL 50 and UL 50E; File Number E507642
- cUL Listed per CSA C22.2 No. 94; File Number E507642
- CSA C22.2 No. 94.1-15 and 94.2-15
- NEMA/EEMAC: Types 4, 4X, and 12
- IEC 60529 Type IP66

Specifications

NEMA 4X (IP66) rated

NEMA 4X gasket door seal for water resistance

NEMA 4X-rated door hardware and latches

Precision-fit door with foam-in-place gasket and easy-turn latch

Continuous welded enclosure corner seams

12-gauge steel on enclosures 60" tall and above

14-gauge steel on enclosures under 60" tall

EIA-standard 19" rack rails in 12-gauge coated steel

#10-32 tapped holes on rack rails (powder coated)

2-post rack rails standard on single-door models

4-post rack rails standard on dual-door models

Fully adjustable sliding rack rail tracks

1/4-20 ground studs on enclosure door and body

Foam-in-place gasket, 1.25" wide

Heavy-duty 3-point latch padlock handle

Heavy-duty lifting pads welded to top

Wall tabs standard on front door enclosures

Wall "Z" brackets standard on left and right door enclosures

Standard 1/2" thick (R3.2) radiant barrier insulation



Standard Features

Dual-Door Access

Single and dual-door configurations available for independent front and rear equipment access

304 and 316L Stainless Steel

304 stainless standard for corrosion-resistant applications; 316L available for coastal, chemical, and high-chloride environments

Wall and Pole Mount Brackets

Folded "Z" offset brackets standard on both sides; wall tabs standard on front-door enclosures for direct wall, column, or pole attachment

EIA Standard Rack Rails

19" adjustable rack rails with full sliding adjustment; 2-post standard on single-door models, 4-post standard on dual-door models

Precision Door Seal

NEMA 4X gasket door seal with precision-fit door and easy-turn latch for consistent water and corrosion resistance

Fully Welded Seams

All corner seams are continuously welded and ground smooth for a clean, sealed enclosure

Ground Studs

1/4-20 ground studs on door and body for proper bonding and grounding


Heavy-Duty Hardware

3-point latch padlock handles with heavy-duty lifting pads welded to top

Radiant Barrier Insulation

Standard 1/2" thick (R3.2) insulation provides thermal protection for outdoor installations

Reference Drawings

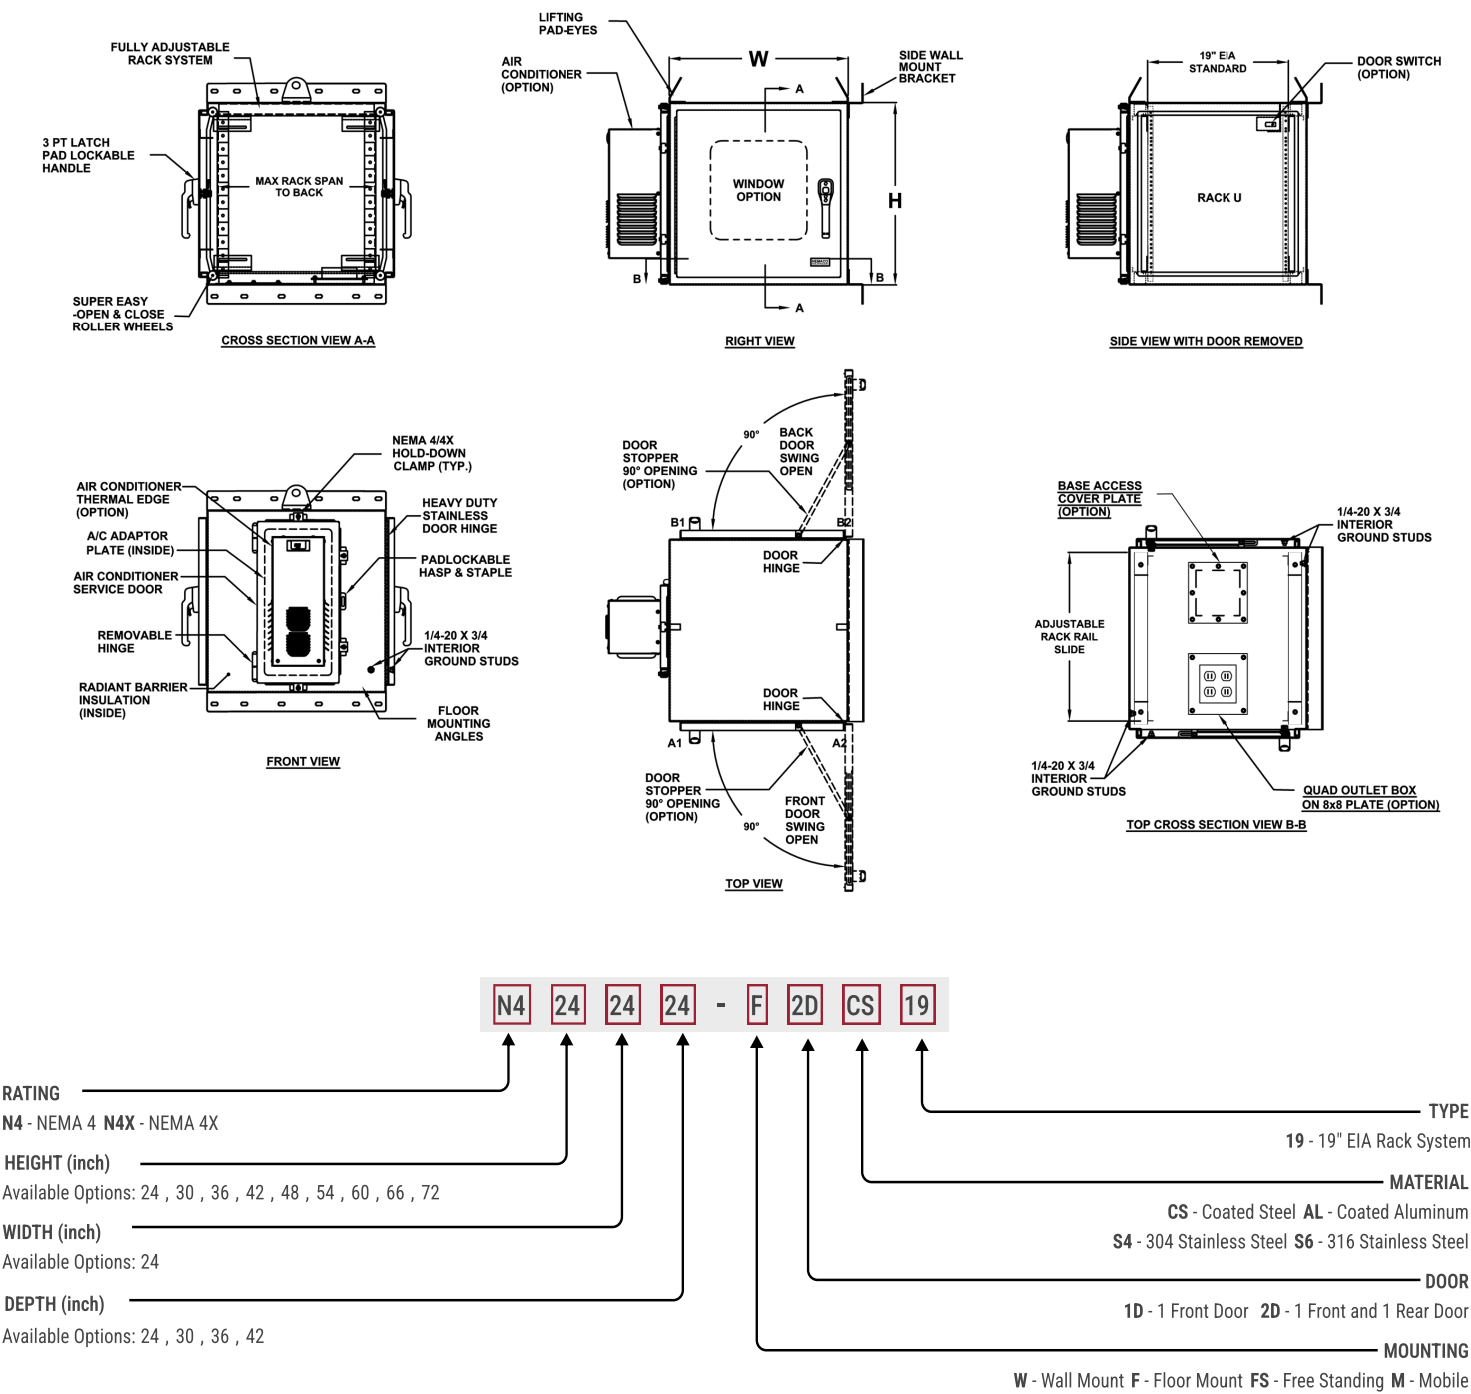

Drawing Table (304 Stainless Steel)

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	16D	N4X242416-W1DS419	12 RU	24	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	80.84
Front		N4X302416-W1DS419	15 RU	30	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	92.21
Front		N4X362416-W1DS419	18 RU	36	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	104.36
Front		N4X422416-W1DS419	22 RU	42	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	116.85
Front		N4X482416-W1DS419	25 RU	48	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	137.84
Front		N4X542416-W1DS419	29 RU	54	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	148.36
Front		N4X602416-W1DS419	32 RU	60	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	160.51
Front		N4X662416-W1DS419	36 RU	66	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	230.97
Front		N4X722416-W1DS419	39 RU	72	24	16	14.5	19" EIA	304SS	14 ga.	Wall Mount	244.62

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	20D	N4X242420-W1DS419	12 RU	24	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	92.29
Front		N4X302420-W1DS419	15 RU	30	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	104.75
Front		N4X362420-W1DS419	18 RU	36	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	117.98
Front		N4X422420-W1DS419	22 RU	42	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	131.56
Front		N4X482420-W1DS419	25 RU	48	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	153.63
Front		N4X542420-W1DS419	29 RU	54	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	165.24
Front		N4X602420-W1DS419	32 RU	60	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	178.47
Front		N4X662420-W1DS419	36 RU	66	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	256.49
Front		N4X722420-W1DS419	39 RU	72	24	20	18.5	19" EIA	304SS	14 ga.	Wall Mount	271.65
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	24D	N4X242424-W1DS419	12 RU	24	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	110.72
Front		N4X302424-W1DS419	15 RU	30	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	124.26
Front		N4X362424-W1DS419	18 RU	36	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	138.58
Front		N4X422424-W1DS419	22 RU	42	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	153.24
Front		N4X482424-W1DS419	25 RU	48	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	170.85
Front		N4X542424-W1DS419	29 RU	54	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	183.54
Front		N4X602424-W1DS419	32 RU	60	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	197.86
Front		N4X662424-W1DS419	36 RU	66	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	283.44
Front		N4X722424-W1DS419	39 RU	72	24	24	22.5	19" EIA	304SS	14 ga.	Wall Mount	300.12
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	30D	N4X242430-W1DS419	12 RU	24	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	127.9
Front		N4X302430-W1DS419	15 RU	30	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	143.07
Front		N4X362430-W1DS419	18 RU	36	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	159.01
Front		N4X422430-W1DS419	22 RU	42	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	175.29
Front		N4X482430-W1DS419	25 RU	48	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	194.53
Front		N4X542430-W1DS419	29 RU	54	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	208.85
Front		N4X602430-W1DS419	32 RU	60	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	224.79
Front		N4X662430-W1DS419	36 RU	66	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	321.71
Front		N4X722430-W1DS419	39 RU	72	24	30	28.5	19" EIA	304SS	14 ga.	Wall Mount	340.67
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	24D	N4X242424-W2DS419	12 RU	24	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	116.69
Front/Rear		N4X302424-W2DS419	15 RU	30	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	131.59
Front/Rear		N4X362424-W2DS419	18 RU	36	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	147.26
Front/Rear		N4X422424-W2DS419	22 RU	42	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	163.41
Front/Rear		N4X482424-W2DS419	25 RU	48	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	191.21
Front/Rear		N4X542424-W2DS419	29 RU	54	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	205.4
Front/Rear		N4X602424-W2DS419	32 RU	60	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	221.08
Front/Rear		N4X662424-W2DS419	36 RU	66	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	311.32
Front/Rear		N4X722424-W2DS419	39 RU	72	24	24	21	19" EIA	304SS	14 ga.	Wall Mount	329.59
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	30D	N4X242430-W2DS419	12 RU	24	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	133.87
Front/Rear		N4X302430-W2DS419	15 RU	30	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	150.39
Front/Rear		N4X362430-W2DS419	18 RU	36	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	167.69
Front/Rear		N4X422430-W2DS419	22 RU	42	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	185.47
Front/Rear		N4X482430-W2DS419	25 RU	48	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	216.57
Front/Rear		N4X542430-W2DS419	29 RU	54	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	232.38
Front/Rear		N4X602430-W2DS419	32 RU	60	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	249.68
Front/Rear		N4X662430-W2DS419	36 RU	66	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	351.93
Front/Rear		N4X722430-W2DS419	39 RU	72	24	30	27	19" EIA	304SS	14 ga.	Wall Mount	372.47

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	36D	N4X242436-W2DS419	12 RU	24	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	159.92
Front/Rear		N4X302436-W2DS419	15 RU	30	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	178.07
Front/Rear		N4X362436-W2DS419	18 RU	36	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	196.99
Front/Rear		N4X422436-W2DS419	22 RU	42	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	216.4
Front/Rear		N4X482436-W2DS419	25 RU	48	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	241.91
Front/Rear		N4X542436-W2DS419	29 RU	54	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	259.35
Front/Rear		N4X602436-W2DS419	32 RU	60	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	278.27
Front/Rear		N4X662436-W2DS419	36 RU	66	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	392.52
Front/Rear		N4X722436-W2DS419	39 RU	72	24	36	33	19" EIA	304SS	14 ga.	Wall Mount	415.33
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	42D	N4X242442-W2DS419	12 RU	24	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	178.79
Front/Rear		N4X302442-W2DS419	15 RU	30	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	198.56
Front/Rear		N4X362442-W2DS419	18 RU	36	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	219.11
Front/Rear		N4X422442-W2DS419	22 RU	42	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	240.14
Front/Rear		N4X482442-W2DS419	25 RU	48	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	267.28
Front/Rear		N4X542442-W2DS419	29 RU	54	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	286.34
Front/Rear		N4X602442-W2DS419	32 RU	60	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	306.89
Front/Rear		N4X662442-W2DS419	36 RU	66	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	433.15
Front/Rear		N4X722442-W2DS419	39 RU	72	24	42	39	19" EIA	304SS	14 ga.	Wall Mount	458.24

Drawing Table (316 Stainless Steel)

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	16D	N4X242416-W1DS619	12 RU	24	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	80.84
Front		N4X302416-W1DS619	15 RU	30	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	92.21
Front		N4X362416-W1DS619	18 RU	36	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	104.36
Front		N4X422416-W1DS619	22 RU	42	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	116.85
Front		N4X482416-W1DS619	25 RU	48	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	137.84
Front		N4X542416-W1DS619	29 RU	54	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	148.36
Front		N4X602416-W1DS619	32 RU	60	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	160.51
Front		N4X662416-W1DS619	36 RU	66	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	230.97
Front		N4X722416-W1DS619	39 RU	72	24	16	14.5	19" EIA	316SS	14 ga.	Wall Mount	244.62
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	20D	N4X242420-W1DS619	12 RU	24	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	92.29
Front		N4X302420-W1DS619	15 RU	30	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	104.75
Front		N4X362420-W1DS619	18 RU	36	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	117.98
Front		N4X422420-W1DS619	22 RU	42	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	131.56
Front		N4X482420-W1DS619	25 RU	48	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	153.63
Front		N4X542420-W1DS619	29 RU	54	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	165.24
Front		N4X602420-W1DS619	32 RU	60	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	178.47
Front		N4X662420-W1DS619	36 RU	66	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	256.49
Front		N4X722420-W1DS619	39 RU	72	24	20	18.5	19" EIA	316SS	14 ga.	Wall Mount	271.65
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	24D	N4X242424-W1DS619	12 RU	24	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	110.72
Front		N4X302424-W1DS619	15 RU	30	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	124.26
Front		N4X362424-W1DS619	18 RU	36	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	138.58
Front		N4X422424-W1DS619	22 RU	42	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	153.24
Front		N4X482424-W1DS619	25 RU	48	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	170.85
Front		N4X542424-W1DS619	29 RU	54	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	183.54
Front		N4X602424-W1DS619	32 RU	60	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	197.86
Front		N4X662424-W1DS619	36 RU	66	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	283.44
Front		N4X722424-W1DS619	39 RU	72	24	24	22.5	19" EIA	316SS	14 ga.	Wall Mount	300.12

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	30D	N4X242430-W1DS619	12 RU	24	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	127.9
Front		N4X302430-W1DS619	15 RU	30	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	143.07
Front		N4X362430-W1DS619	18 RU	36	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	159.01
Front		N4X422430-W1DS619	22 RU	42	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	175.29
Front		N4X482430-W1DS619	25 RU	48	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	194.53
Front		N4X542430-W1DS619	29 RU	54	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	208.85
Front		N4X602430-W1DS619	32 RU	60	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	224.79
Front		N4X662430-W1DS619	36 RU	66	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	321.71
Front		N4X722430-W1DS619	39 RU	72	24	30	28.5	19" EIA	316SS	14 ga.	Wall Mount	340.67
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	24D	N4X242424-W2DS619	12 RU	24	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	116.69
Front/Rear		N4X302424-W2DS619	15 RU	30	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	131.59
Front/Rear		N4X362424-W2DS619	18 RU	36	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	147.26
Front/Rear		N4X422424-W2DS619	22 RU	42	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	163.41
Front/Rear		N4X482424-W2DS619	25 RU	48	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	191.21
Front/Rear		N4X542424-W2DS619	29 RU	54	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	205.4
Front/Rear		N4X602424-W2DS619	32 RU	60	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	221.08
Front/Rear		N4X662424-W2DS619	36 RU	66	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	311.32
Front/Rear		N4X722424-W2DS619	39 RU	72	24	24	21	19" EIA	316SS	14 ga.	Wall Mount	329.59
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	30D	N4X242430-W2DS619	12 RU	24	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	133.87
Front/Rear		N4X302430-W2DS619	15 RU	30	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	150.39
Front/Rear		N4X362430-W2DS619	18 RU	36	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	167.69
Front/Rear		N4X422430-W2DS619	22 RU	42	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	185.47
Front/Rear		N4X482430-W2DS619	25 RU	48	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	216.57
Front/Rear		N4X542430-W2DS619	29 RU	54	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	232.38
Front/Rear		N4X602430-W2DS619	32 RU	60	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	249.68
Front/Rear		N4X662430-W2DS619	36 RU	66	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	351.93
Front/Rear		N4X722430-W2DS619	39 RU	72	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	372.47
Front/Rear		N4X722430-W2DS619	39 RU	72	24	30	27	19" EIA	316SS	14 ga.	Wall Mount	372.47
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	36D	N4X242436-W2DS619	12 RU	24	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	159.92
Front/Rear		N4X302436-W2DS619	15 RU	30	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	178.07
Front/Rear		N4X362436-W2DS619	18 RU	36	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	196.99
Front/Rear		N4X422436-W2DS619	22 RU	42	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	216.4
Front/Rear		N4X482436-W2DS619	25 RU	48	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	241.91
Front/Rear		N4X542436-W2DS619	29 RU	54	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	259.35
Front/Rear		N4X602436-W2DS619	32 RU	60	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	278.27
Front/Rear		N4X662436-W2DS619	36 RU	66	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	392.52
Front/Rear		N4X722436-W2DS619	39 RU	72	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	415.33
Front/Rear		N4X722436-W2DS619	39 RU	72	24	36	33	19" EIA	316SS	14 ga.	Wall Mount	415.33
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	42D	N4X242442-W2DS619	12 RU	24	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	178.79
Front/Rear		N4X302442-W2DS619	15 RU	30	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	198.56
Front/Rear		N4X362442-W2DS619	18 RU	36	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	219.11
Front/Rear		N4X422442-W2DS619	22 RU	42	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	240.14
Front/Rear		N4X482442-W2DS619	25 RU	48	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	267.28
Front/Rear		N4X542442-W2DS619	29 RU	54	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	286.34
Front/Rear		N4X602442-W2DS619	32 RU	60	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	306.89
Front/Rear		N4X662442-W2DS619	36 RU	66	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	433.15
Front/Rear		N4X722442-W2DS619	39 RU	72	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	458.24
Front/Rear		N4X722442-W2DS619	39 RU	72	24	42	39	19" EIA	316SS	14 ga.	Wall Mount	458.24

19" EIA Server Rack Enclosure

Accessories & Options



Air Conditioned Unit

A side-mount air conditioning unit maintains stable internal temperatures in high-heat or direct-sun installations.




Contact Door Switch

A door-mounted contact switch detects open or closed status to trigger alarms, lighting, or remote monitoring systems when the enclosure is accessed.



Filtered Fans

A filtered fan assembly provides positive-pressure ventilation, drawing outside air through replaceable filter fan to cool internal components while blocking dust and debris.




Gasketed Cover / Gland Plate

A gasketed gland plate seals cable entry points at the enclosure floor while maintaining ingress protection rating across multiple conduit or cable pass-throughs.



NEMA 4/4X Clamps and Lockable Hasp

Draw-action clamps distribute clamping force evenly around the door perimeter to maintain a watertight seal, with a lockable hasp for padlock compatibility.




Quad Outlet Box

A floor-mounted four-outlet power box provides convenient AC power distribution to rack-mounted equipment without external hardware.




Sunshield Cover

An extended metal canopy mounts over the enclosure top to shade the cabinet from direct solar load, reducing internal temperature rise in outdoor installations.



19" EIA Stainless Steel Rack Rails

Stainless steel vertical rack rails conform to 19" EIA-310 spacing to support standard rack-mount equipment inside the enclosure.




19" EIA Horizontal Busbar

A horizontal busbar mounts across the top of the rack rail assembly to provide a centralized grounding and bonding point for rack-mounted equipment.




Air Conditioner Hatch Door

A pre-cut hatch panel with integrated mounting frame accommodates a side-mount air conditioning unit without compromising the enclosure's weatherproof seal.



Barrier Insulation

Interior insulation panels line the back wall and door to reduce heat transfer and condensation risk in outdoor and temperature-variable environments.



Door Stopper / Ground Strap

Holds the door open at a fixed angle during servicing while maintaining a continuous ground path between the door and cabinet body.



Floor Mounting Kit

A steel base and anchor kit secures the enclosure to a concrete pad or raised floor with pre-drilled anchor points and leveling provisions.



Key Lockable Handle

A key-lockable handle restricts enclosure access to authorized personnel, available in keyed-alike or keyed-different configurations.



Print Pocket

A door-mounted document pocket keeps wiring diagrams, equipment specs, or maintenance records accessible inside the enclosure for field reference.



Removable Lifting Pads

Threaded lifting eye bolts install into the enclosure top for rigging and crane lifts, then remove cleanly after installation to restore the flat-top profile.



Window Glass Door (Non-UL Option)

A tempered glass window panel allows visual inspection of rack-mounted equipment status without opening the enclosure; not available on UL Listed configurations.