

NEMA 4X Junction & Pull Boxes

FLEXBOX™ 4X SERIES



Applications

NEMACO™'s FLEXBOX™ 4X wall mount junction and pull boxes are built for outdoor electrical wire splices, terminations, and connections in corrosive environments where galvanized steel or aluminum is insufficient. Available in 304 and 316L stainless steel with a #4 grain finish and ASTM A967 passivation standard, these boxes are suited for coastal, chemical processing, food and beverage, and wastewater applications where salt air, chemical exposure, or frequent washdown is a daily operating condition.

These boxes are deployed across electrical power distribution, process control, building automation, transit, utility infrastructure, and industrial wiring applications where a compact, corrosion-resistant junction point at a fixed wall-mount location is required.

Industry Standard

- UL 50 and UL 50E; File Number E507642
- cUL 50 and cUL 50E; File Number E507642
- CSA C22.2 No. 94.1-15 and 94.2-15
- NEMA/EEMAC: Types 4, 4X, and 12
- IEC 60529 Type IP66

Specifications

Ratings: NEMA 4X, IP66

Configuration: Wall mount

Material: Stainless steel (304 or 316L)

Material thickness: 14 to 12 gauge

Standard finish: #4 Grain Finish

Available dimensions (in.): H: 12-60, W: 12-36, D: 4-12

ASTM A967 passivation clean standard

NEMA 4/4X water and dust resistant neoprene door seal

NEMA 4/4X screw door clamps

Padlockable hasp and staple

Collar studs or 3/8-16 weld studs

1/4-20 x 3/4 interior ground studs

Interior plate standard

Door opens 135 degrees



Standard Features

NEMA 4/4X Screw Door Clamps

Screw-type door clamps compress the door seal evenly across the full perimeter for consistent water and dust resistance at every closure

ASTM A967 Passivation

Each enclosure undergoes passivation per ASTM A967 to remove weld oxidation and surface contaminants, maximizing corrosion resistance across the full exterior surface before shipment

Neoprene Door Seal

NEMA 4/4X-rated neoprene gasket provides water and dust resistance for rain, snow, and washdown conditions at the door perimeter

Padlockable Hasp and Staple

Standard padlockable hasp and staple provision allows external padlock security without additional hardware

Interior Plate

Standard interior plate provides a direct mounting surface for terminal blocks and control components

Ground Studs

1/4-20 x 3/4 interior ground studs standard for proper bonding and grounding


Wall Mount Configuration

Integrated mounting provisions allow secure installation on interior and exterior walls in indoor or outdoor applications; door swings to 135 degrees for full interior access


304 and 316L Stainless Steel

304 stainless standard for corrosion-resistant applications; 316L available for coastal, chemical, and high-chloride environments

Reference

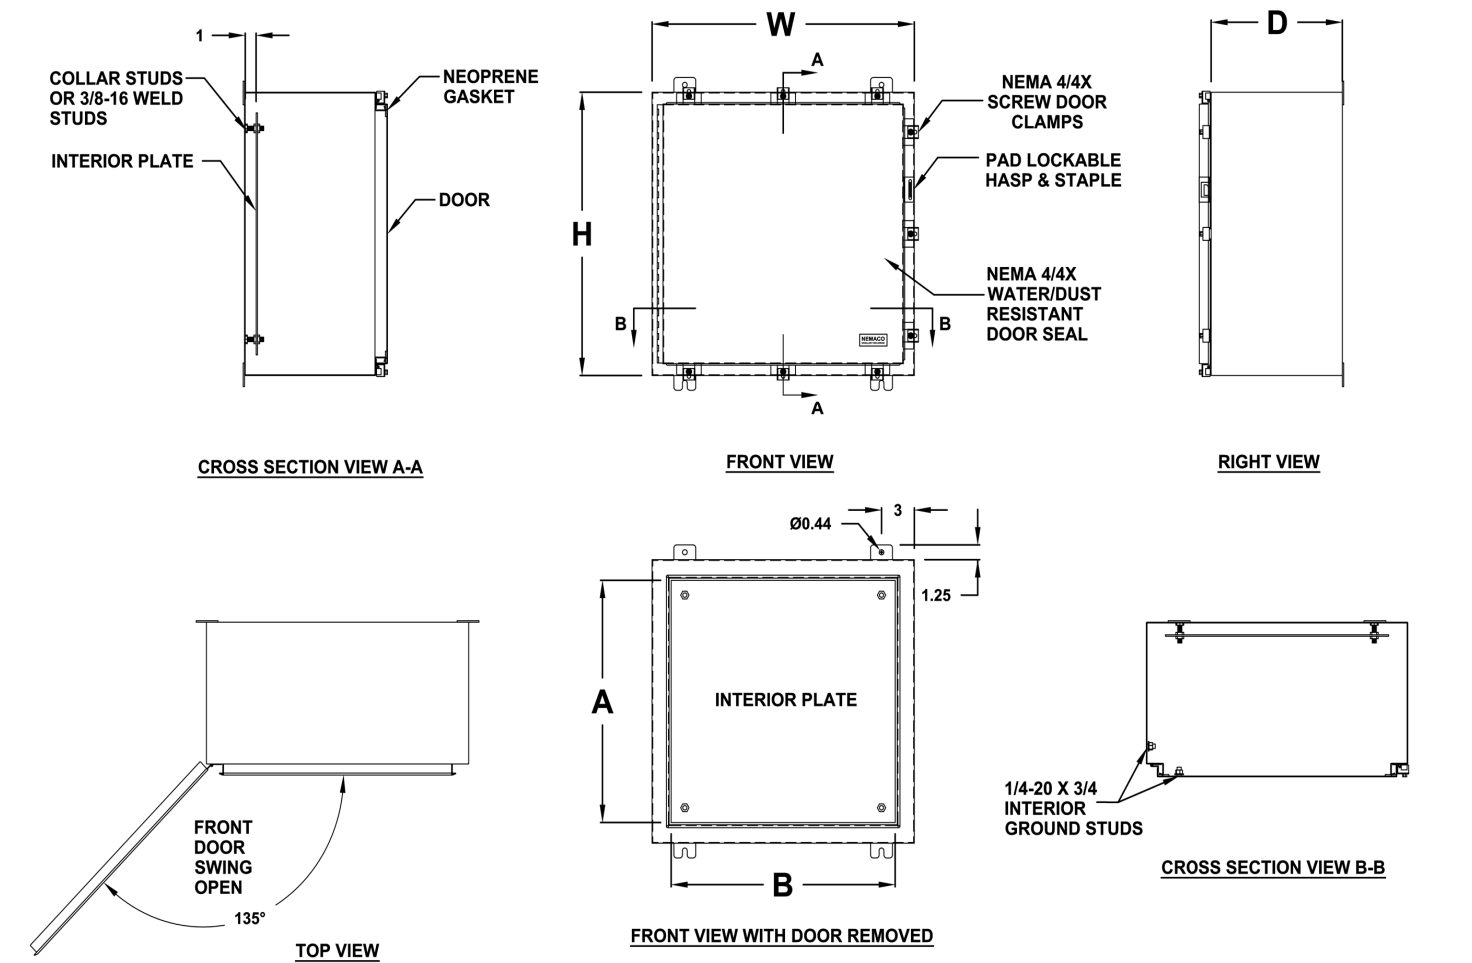

Part Number Decoder

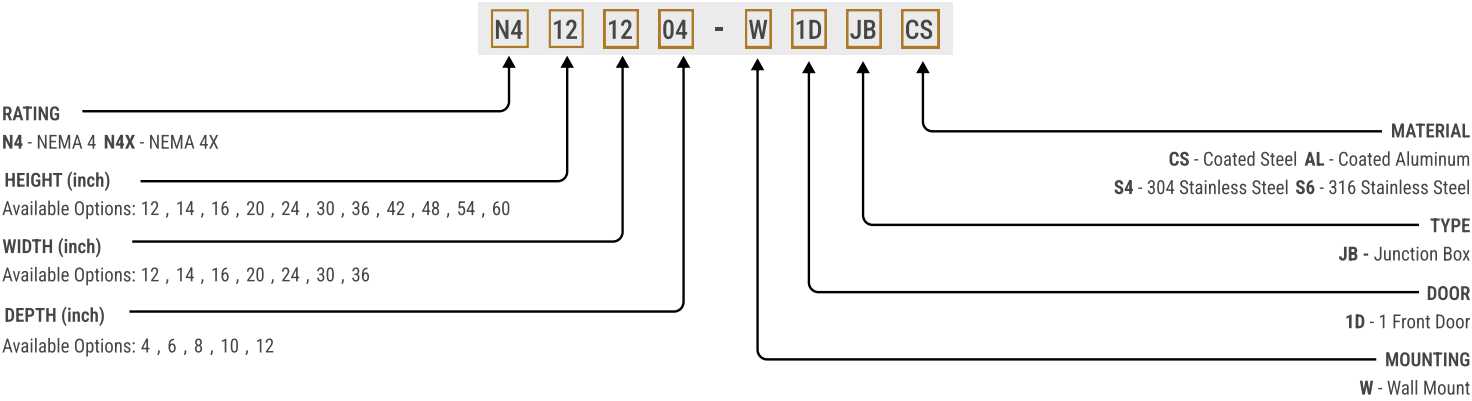

Drawing Table (304 Stainless Steel)

Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
4D	N4X121204-W1DJBS4	12	12	4	304SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	16.05
	N4X141404-W1DJBS4	14	14	4	304SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	20.16
	N4X161604-W1DJBS4	16	16	4	304SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	24.72
	N4X201604-W1DJBS4	20	16	4	304SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	29.67
	N4X202004-W1DJBS4	20	20	4	304SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	35.68
	N4X242404-W1DJBS4	24	24	4	304SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	48.02
	N4X302404-W1DJBS4	30	24	4	304SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	58.72
	N4X303004-W1DJBS4	30	30	4	304SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	70.92
	N4X362404-W1DJBS4	36	24	4	304SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	68.9

4D	N4X363004-W1DJBS4	36	30	4	304SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	83.16
	N4X363604-W1DJBS4	36	36	4	304SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	97.62
	N4X482404-W1DJBS4	48	24	4	304SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	89.12
	N4X483004-W1DJBS4	48	30	4	304SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	107.51
	N4X483604-W1DJBS4	48	36	4	304SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	126.09
	N4X603604-W1DJBS4	60	36	4	304SS	12 ga.	#4 Grain	IP6036-CS	56	32	204.38
Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
6D	N4X121206-W1DJBS4	12	12	6	304SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	18.2
	N4X141406-W1DJBS4	14	14	6	304SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	22.67
	N4X161606-W1DJBS4	16	16	6	304SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	27.6
	N4X201606-W1DJBS4	20	16	6	304SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	32.9
	N4X202006-W1DJBS4	20	20	6	304SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	39.28
	N4X242406-W1DJBS4	24	24	6	304SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	52.34
	N4X302406-W1DJBS4	30	24	6	304SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	63.58
	N4X303006-W1DJBS4	30	30	6	304SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	76.32
	N4X362406-W1DJBS4	36	24	6	304SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	74.31
6D	N4X363006-W1DJBS4	36	30	6	304SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	89.11
	N4X363606-W1DJBS4	36	36	6	304SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	104.11
	N4X482406-W1DJBS4	48	24	6	304SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	95.61
	N4X483006-W1DJBS4	48	30	6	304SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	114.54
	N4X483606-W1DJBS4	48	36	6	304SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	133.66
	N4X603606-W1DJBS4	60	36	6	304SS	12 ga.	#4 Grain	IP6036-CS	56	32	216.49
Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
8D	N4X121208-W1DJBS4	12	12	8	304SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	20.35
	N4X141408-W1DJBS4	14	14	8	304SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	25.18
	N4X161608-W1DJBS4	16	16	8	304SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	30.47
	N4X201608-W1DJBS4	20	16	8	304SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	36.14
	N4X202008-W1DJBS4	20	20	8	304SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	42.87
	N4X242408-W1DJBS4	24	24	8	304SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	56.66
	N4X302408-W1DJBS4	30	24	8	304SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	68.44
	N4X303008-W1DJBS4	30	30	8	304SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	81.72
	N4X362408-W1DJBS4	36	24	8	304SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	79.71
8D	N4X363008-W1DJBS4	36	30	8	304SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	95.05
	N4X363608-W1DJBS4	36	36	8	304SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	110.59
	N4X482408-W1DJBS4	48	24	8	304SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	102.1
	N4X483008-W1DJBS4	48	30	8	304SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	121.57
	N4X483608-W1DJBS4	48	36	8	304SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	141.24
	N4X603608-W1DJBS4	60	36	8	304SS	12 ga.	#4 Grain	IP6036-CS	56	32	228.6
Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
10D	N4X121210-W1DJBS4	12	12	10	304SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	22.5
	N4X141410-W1DJBS4	14	14	10	304SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	27.69
	N4X161610-W1DJBS4	16	16	10	304SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	33.34
	N4X201610-W1DJBS4	20	16	10	304SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	39.38
	N4X202010-W1DJBS4	20	20	10	304SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	46.47
	N4X242410-W1DJBS4	24	24	10	304SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	60.98
	N4X302410-W1DJBS4	30	24	10	304SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	73.31
	N4X303010-W1DJBS4	30	30	10	304SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	87.13
	N4X362410-W1DJBS4	36	24	10	304SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	85.11
10D	N4X363010-W1DJBS4	36	30	10	304SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	101
	N4X363610-W1DJBS4	36	36	10	304SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	117.08
	N4X482410-W1DJBS4	48	24	10	304SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	108.58
	N4X483010-W1DJBS4	48	30	10	304SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	128.6
	N4X483610-W1DJBS4	48	36	10	304SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	148.81
	N4X603610-W1DJBS4	60	36	10	304SS	12 ga.	#4 Grain	IP6036-CS	56	32	240.71

Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
12D	N4X121212-W1DJBS4	12	12	12	304SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	24.65
	N4X141412-W1DJBS4	14	14	12	304SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	30.21
	N4X161612-W1DJBS4	16	16	12	304SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	36.22
	N4X201612-W1DJBS4	20	16	12	304SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	42.61
	N4X202012-W1DJBS4	20	20	12	304SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	50.07
	N4X242412-W1DJBS4	24	24	12	304SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	65.3
	N4X302412-W1DJBS4	30	24	12	304SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	78.17
	N4X303012-W1DJBS4	30	30	12	304SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	92.53
	N4X362412-W1DJBS4	36	24	12	304SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	90.52
12D	N4X363012-W1DJBS4	36	30	12	304SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	106.94
	N4X363612-W1DJBS4	36	36	12	304SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	123.57
	N4X482412-W1DJBS4	48	24	12	304SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	115.07
	N4X483012-W1DJBS4	48	30	12	304SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	135.63
	N4X483612-W1DJBS4	48	36	12	304SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	156.38
	N4X603612-W1DJBS4	60	36	12	304SS	12 ga.	#4 Grain	IP6036-CS	56	32	252.82

Drawing Table (316 Stainless Steel)

Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
4D	N4X121204-W1DJBS6	12	12	4	316SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	16.05
	N4X141404-W1DJBS6	14	14	4	316SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	20.16
	N4X161604-W1DJBS6	16	16	4	316SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	24.72
	N4X201604-W1DJBS6	20	16	4	316SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	29.67
	N4X202004-W1DJBS6	20	20	4	316SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	35.68
	N4X242404-W1DJBS6	24	24	4	316SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	48.02
	N4X302404-W1DJBS6	30	24	4	316SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	58.72
	N4X303004-W1DJBS6	30	30	4	316SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	70.92
	N4X362404-W1DJBS6	36	24	4	316SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	68.9
4D	N4X363004-W1DJBS6	36	30	4	316SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	83.16
	N4X363604-W1DJBS6	36	36	4	316SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	97.62
	N4X482404-W1DJBS6	48	24	4	316SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	89.12
	N4X483004-W1DJBS6	48	30	4	316SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	107.51
	N4X483604-W1DJBS6	48	36	4	316SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	126.09
	N4X603604-W1DJBS6	60	36	4	316SS	12 ga.	#4 Grain	IP6036-CS	56	32	204.38
Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
6D	N4X121206-W1DJBS6	12	12	6	316SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	18.2
	N4X141406-W1DJBS6	14	14	6	316SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	22.67
	N4X161606-W1DJBS6	16	16	6	316SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	27.6
	N4X201606-W1DJBS6	20	16	6	316SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	32.9
	N4X202006-W1DJBS6	20	20	6	316SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	39.28
	N4X242406-W1DJBS6	24	24	6	316SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	52.34
	N4X302406-W1DJBS6	30	24	6	316SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	63.58
	N4X303006-W1DJBS6	30	30	6	316SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	76.32
	N4X362406-W1DJBS6	36	24	6	316SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	74.31
6D	N4X363006-W1DJBS6	36	30	6	316SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	89.11
	N4X363606-W1DJBS6	36	36	6	316SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	104.11
	N4X482406-W1DJBS6	48	24	6	316SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	95.61
	N4X483006-W1DJBS6	48	30	6	316SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	114.54
	N4X483606-W1DJBS6	48	36	6	316SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	133.66
	N4X603606-W1DJBS6	60	36	6	316SS	12 ga.	#4 Grain	IP6036-CS	56	32	216.49

Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
8D	N4X121208-W1DJBS6	12	12	8	316SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	20.35
	N4X141408-W1DJBS6	14	14	8	316SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	25.18
	N4X161608-W1DJBS6	16	16	8	316SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	30.47
	N4X201608-W1DJBS6	20	16	8	316SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	36.14
	N4X202008-W1DJBS6	20	20	8	316SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	42.87
	N4X242408-W1DJBS6	24	24	8	316SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	56.66
	N4X302408-W1DJBS6	30	24	8	316SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	68.44
	N4X303008-W1DJBS6	30	30	8	316SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	81.72
	N4X362408-W1DJBS6	36	24	8	316SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	79.71
8D	N4X363008-W1DJBS6	36	30	8	316SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	95.05
	N4X363608-W1DJBS6	36	36	8	316SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	110.59
	N4X482408-W1DJBS6	48	24	8	316SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	102.1
	N4X483008-W1DJBS6	48	30	8	316SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	121.57
	N4X483608-W1DJBS6	48	36	8	316SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	141.24
	N4X603608-W1DJBS6	60	36	8	316SS	12 ga.	#4 Grain	IP6036-CS	56	32	228.6
Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
10D	N4X121210-W1DJBS6	12	12	10	316SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	22.5
	N4X141410-W1DJBS6	14	14	10	316SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	27.69
	N4X161610-W1DJBS6	16	16	10	316SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	33.34
	N4X201610-W1DJBS6	20	16	10	316SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	39.38
	N4X202010-W1DJBS6	20	20	10	316SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	46.47
	N4X242410-W1DJBS6	24	24	10	316SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	60.98
	N4X302410-W1DJBS6	30	24	10	316SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	73.31
	N4X303010-W1DJBS6	30	30	10	316SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	87.13
	N4X362410-W1DJBS6	36	24	10	316SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	85.11
10D	N4X363010-W1DJBS6	36	30	10	316SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	101
	N4X363610-W1DJBS6	36	36	10	316SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	117.08
	N4X482410-W1DJBS6	48	24	10	316SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	108.58
	N4X483010-W1DJBS6	48	30	10	316SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	128.6
	N4X483610-W1DJBS6	48	36	10	316SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	148.81
	N4X603610-W1DJBS6	60	36	10	316SS	12 ga.	#4 Grain	IP6036-CS	56	32	240.71
Encl. Depth	Part Number	H	W	D	Material	Matl. Thk.	Std. finish	Sub Panel#	A	B	Encl. Weight
12D	N4X121212-W1DJBS6	12	12	12	316SS	14 ga.	#4 Grain	IP1212-CS	8.5	8.5	24.65
	N4X141412-W1DJBS6	14	14	12	316SS	14 ga.	#4 Grain	IP1414-CS	10.5	10.5	30.21
	N4X161612-W1DJBS6	16	16	12	316SS	14 ga.	#4 Grain	IP1616-CS	12.5	12	36.22
	N4X201612-W1DJBS6	20	16	12	316SS	14 ga.	#4 Grain	IP2016-CS	16.5	12.5	42.61
	N4X202012-W1DJBS6	20	20	12	316SS	14 ga.	#4 Grain	IP2020-CS	16.5	16.5	50.07
	N4X242412-W1DJBS6	24	24	12	316SS	14 ga.	#4 Grain	IP2424-CS	20.5	20.5	65.3
	N4X302412-W1DJBS6	30	24	12	316SS	14 ga.	#4 Grain	IP3024-CS	26.5	20.5	78.17
	N4X303012-W1DJBS6	30	30	12	316SS	14 ga.	#4 Grain	IP3030-CS	26.5	26.5	92.53
	N4X362412-W1DJBS6	36	24	12	316SS	14 ga.	#4 Grain	IP3624-CS	32.5	20.5	90.52
12D	N4X363012-W1DJBS6	36	30	12	316SS	14 ga.	#4 Grain	IP3630-CS	32.5	26.5	106.94
	N4X363612-W1DJBS6	36	36	12	316SS	14 ga.	#4 Grain	IP3636-CS	32.5	32.5	123.57
	N4X482412-W1DJBS6	48	24	12	316SS	14 ga.	#4 Grain	IP4824-CS	44.5	20.5	115.07
	N4X483012-W1DJBS6	48	30	12	316SS	14 ga.	#4 Grain	IP4830-CS	44.5	26.5	135.63
	N4X483612-W1DJBS6	48	36	12	316SS	14 ga.	#4 Grain	IP4836-CS	44.5	32.5	156.38
	N4X603612-W1DJBS6	60	36	12	316SS	12 ga.	#4 Grain	IP6036-CS	56	32	252.82

Floor-Mount Electrical Control Cabinet

Accessories & Options



Window Glass Door (non-UL option)

A tempered glass window panel allows visual inspection of internal equipment status without opening the enclosure; not available on UL Listed configurations.



Tamperproof Screws

Specialty fasteners replace standard cover screws to deter unauthorized access, requiring a proprietary driver not available through common toolsets.



Pole Mount Bracket

A formed steel channel bracket attaches to the enclosure back and clamps to a vertical pole or post, enabling installation in the field without wall or pad access.



Lifting Pad

Welded steel lifting lugs mount to the enclosure top corners to provide secure rigging points for crane or hoist lifts during installation.



3pt Latch Handle

A three-point latch handle simultaneously engages locking points at the top, center, and bottom of the door to ensure even compression of the door gasket.



Heavy Duty Wall Brackets

Heavy-gauge steel wall brackets mount to the enclosure back panel and secure directly to structural walls or framing, providing a rigid installation point for wall-mounted configurations.