

Single Bay Floor Mount 19" EIA Server Rack Cabinet

SERVERPRO™ 4X SERIES

IP66

NEMA 4X

Applications

NEMACO™'s NEMA 4X stainless steel 19" rack enclosures are built for environments where corrosion resistance is the primary design requirement. Available in 304 and 316L stainless steel, these enclosures are suited for coastal installations, chemical processing facilities, wastewater treatment plants, food and beverage production environments, and any outdoor deployment where salt air, chemical wash, or persistent moisture would compromise a powder-coated enclosure over time. The 316L grade provides elevated resistance to chloride and acidic exposure for the most demanding corrosive conditions.

Available in single and dual-door configurations, these enclosures provide full front-and-rear rack access with the same EIA-standard 19" rack rail system used across the SERVERPRO™ line. They have been deployed across security and surveillance systems, radar installations, SCADA and process control networks, satellite telecom infrastructure, power plants, fiber optic nodes, and data acquisition systems for commercial and military applications. The 6" standard floor kit provides elevation above standing water and minor flooding for ground-level outdoor installations.

Industry Standard

- UL 50 and UL 50E; File Number E507642
- cUL Listed per CSA C22.2 No. 94; File Number E507642
- CSA C22.2 No. 94.1-15 and 94.2-15
- NEMA/EEMAC: Types 4, 4X, and 12
- IEC 60529 Type IP66

Specifications

NEMA 4X (IP66) rated

NEMA 4X gasket door seal for water resistance

NEMA 4X-rated door hardware and latches

Precision-fit door with foam-in-place gasket and easy-turn latch

Continuous welded enclosure corner seams

12-gauge steel on enclosures 60" tall and above

14-gauge steel on enclosures under 60" tall

EIA-standard 19" rack rails in 12-gauge coated steel

#10-32 tapped holes on rack rails (powder coated)

2-post rack rails standard on single-door models

4-post rack rails standard on dual-door models

Fully adjustable sliding rack rail tracks

1/4-20 ground studs on enclosure door and body

Foam-in-place gasket, 1.25" wide

Heavy-duty 3-point latch padlock handle

Heavy-duty lifting pads welded to top

Standard 1/2" thick (R3.2) radiant barrier insulation

6" floor mounting kit standard



Standard Features

Dual-Door Access

Single and dual-door configurations available for independent front and rear equipment access

304 and 316L Stainless Steel

304 stainless standard for corrosion-resistant applications; 316L available for coastal, chemical, and high-chloride environments

EIA Standard Rack Rails

19" adjustable rack rails with full sliding adjustment; 2-post standard on single-door models, 4-post standard on dual-door models

Precision Door Seal

NEMA 4X gasket door seal with precision-fit door and easy-turn latch for consistent water and corrosion resistance

Fully Welded Seams

All corner seams are continuously welded and ground smooth for a clean, sealed enclosure

Ground Studs

1/4-20 ground studs on door and body for proper bonding and grounding

Heavy-Duty Hardware

3-point latch padlock handles with heavy-duty lifting pads welded to top


Radiant Barrier Insulation

Standard 1/2" thick (R3.2) insulation provides thermal protection for outdoor installations

Floor Kit

6" standard floor kit elevates the enclosure above standing water, minor flooding, and ground-level snow

Reference

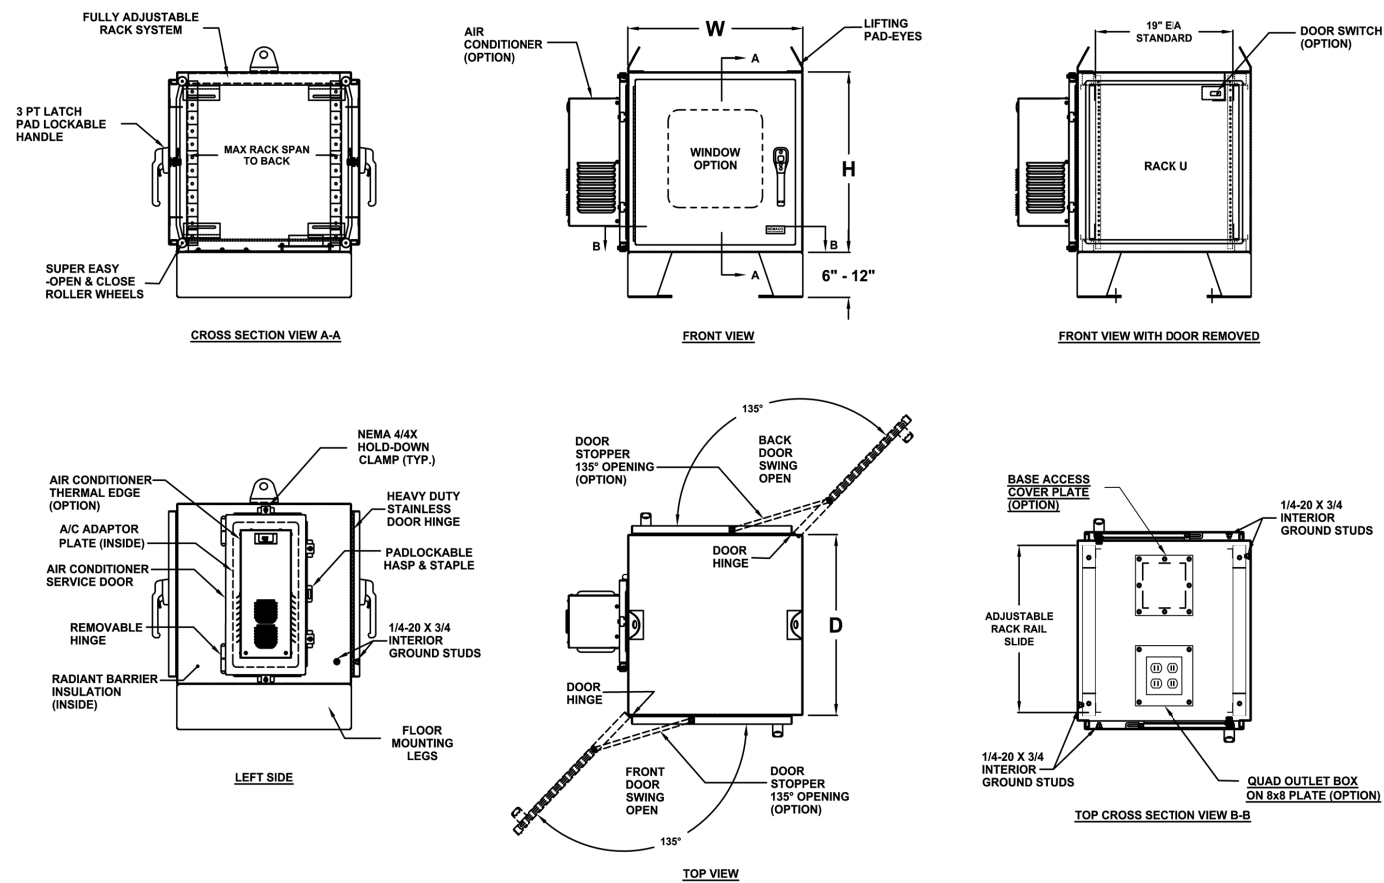

Part Number Decoder

N4

24

24

24

-

F

2D

CS

19

RATING

N4 - NEMA 4 N4X - NEMA 4X

HEIGHT (inch)

Available Options: 24 , 30 , 36 , 42 , 48 , 54 , 60 , 66 , 72

WIDTH (inch)

Available Options: 24

DEPTH (inch)

Available Options: 24 , 30 , 36 , 42

TYPE

19 - 19" EIA Rack System

MATERIAL

CS - Coated Steel AL - Coated Aluminum S4 - 304 Stainless Steel S6 - 316 Stainless Steel

DOOR

1D - 1 Front Door 2D - 1 Front and 1 Rear Door

MOUNTING

W - Wall Mount F - Floor Mount FS - Free Standing M - Mobile

Drawing Table (304 Stainless Steel)

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	16D	N4X242416-F1DS419	12 RU	24	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	101.78
Front		N4X302416-F1DS419	15 RU	30	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	113.16
Front		N4X362416-F1DS419	18 RU	36	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	125.31
Front		N4X422416-F1DS419	22 RU	42	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	137.8
Front		N4X482416-F1DS419	25 RU	48	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	153.24
Front		N4X542416-F1DS419	29 RU	54	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	163.76
Front		N4X602416-F1DS419	32 RU	60	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	175.92
Front		N4X662416-F1DS419	36 RU	66	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	243.68
Front		N4X722416-F1DS419	39 RU	72	24	16	14.5	19" EIA	304SS	14 ga.	Floor Mount	257.33

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	20D	N4X242420-F1DS419	12 RU	24	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	117.59
Front		N4X302420-F1DS419	15 RU	30	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	130.05
Front		N4X362420-F1DS419	18 RU	36	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	143.29
Front		N4X422420-F1DS419	22 RU	42	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	156.86
Front		N4X482420-F1DS419	25 RU	48	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	173.39
Front		N4X542420-F1DS419	29 RU	54	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	185
Front		N4X602420-F1DS419	32 RU	60	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	198.23
Front		N4X662420-F1DS419	36 RU	66	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	273.56
Front		N4X722420-F1DS419	39 RU	72	24	20	18.5	19" EIA	304SS	14 ga.	Floor Mount	288.72
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	24D	N4X242424-F1DS419	12 RU	24	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	136.38
Front		N4X302424-F1DS419	15 RU	30	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	149.92
Front		N4X362424-F1DS419	18 RU	36	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	164.24
Front		N4X422424-F1DS419	22 RU	42	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	178.9
Front		N4X482424-F1DS419	25 RU	48	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	196.51
Front		N4X542424-F1DS419	29 RU	54	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	209.2
Front		N4X602424-F1DS419	32 RU	60	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	223.52
Front		N4X662424-F1DS419	36 RU	66	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	306.4
Front		N4X722424-F1DS419	39 RU	72	24	24	22.5	19" EIA	304SS	14 ga.	Floor Mount	323.09
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	30D	N4X242430-F1DS419	12 RU	24	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	160.1
Front		N4X302430-F1DS419	15 RU	30	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	175.27
Front		N4X362430-F1DS419	18 RU	36	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	191.22
Front		N4X422430-F1DS419	22 RU	42	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	207.5
Front		N4X482430-F1DS419	25 RU	48	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	226.73
Front		N4X542430-F1DS419	29 RU	54	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	241.05
Front		N4X602430-F1DS419	32 RU	60	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	257
Front		N4X662430-F1DS419	36 RU	66	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	351.22
Front		N4X722430-F1DS419	39 RU	72	24	30	28.5	19" EIA	304SS	14 ga.	Floor Mount	370.18
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	24D	N4X242424-F2DS419	12 RU	24	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	146.36
Front/Rear		N4X302424-F2DS419	15 RU	30	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	161.25
Front/Rear		N4X362424-F2DS419	18 RU	36	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	176.93
Front/Rear		N4X422424-F2DS419	22 RU	42	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	193.08
Front/Rear		N4X482424-F2DS419	25 RU	48	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	215.34
Front/Rear		N4X542424-F2DS419	29 RU	54	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	229.53
Front/Rear		N4X602424-F2DS419	32 RU	60	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	245.2
Front/Rear		N4X662424-F2DS419	36 RU	66	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	332.75
Front/Rear		N4X722424-F2DS419	39 RU	72	24	24	21	19" EIA	304SS	14 ga.	Floor Mount	351.01
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	30D	N4X242430-F2DS419	12 RU	24	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	170.08
Front/Rear		N4X302430-F2DS419	15 RU	30	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	186.6
Front/Rear		N4X362430-F2DS419	18 RU	36	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	203.9
Front/Rear		N4X422430-F2DS419	22 RU	42	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	221.68
Front/Rear		N4X482430-F2DS419	25 RU	48	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	245.56
Front/Rear		N4X542430-F2DS419	29 RU	54	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	261.38
Front/Rear		N4X602430-F2DS419	32 RU	60	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	278.68
Front/Rear		N4X662430-F2DS419	36 RU	66	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	377.57
Front/Rear		N4X722430-F2DS419	39 RU	72	24	30	27	19" EIA	304SS	14 ga.	Floor Mount	398.11

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	36D	N4X242436-F2DS419	12 RU	24	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	193.8
Front/Rear		N4X302436-F2DS419	15 RU	30	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	211.95
Front/Rear		N4X362436-F2DS419	18 RU	36	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	230.87
Front/Rear		N4X422436-F2DS419	22 RU	42	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	250.28
Front/Rear		N4X482436-F2DS419	25 RU	48	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	275.79
Front/Rear		N4X542436-F2DS419	29 RU	54	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	293.23
Front/Rear		N4X602436-F2DS419	32 RU	60	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	312.15
Front/Rear		N4X662436-F2DS419	36 RU	66	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	422.38
Front/Rear		N4X722436-F2DS419	39 RU	72	24	36	33	19" EIA	304SS	14 ga.	Floor Mount	445.2
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	42D	N4X242442-F2DS419	12 RU	24	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	217.52
Front/Rear		N4X302442-F2DS419	15 RU	30	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	237.3
Front/Rear		N4X362442-F2DS419	18 RU	36	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	257.85
Front/Rear		N4X422442-F2DS419	22 RU	42	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	278.88
Front/Rear		N4X482442-F2DS419	25 RU	48	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	306.01
Front/Rear		N4X542442-F2DS419	29 RU	54	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	325.08
Front/Rear		N4X602442-F2DS419	32 RU	60	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	345.63
Front/Rear		N4X662442-F2DS419	36 RU	66	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	467.2
Front/Rear		N4X722442-F2DS419	39 RU	72	24	42	39	19" EIA	304SS	14 ga.	Floor Mount	492.29

Drawing Table

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	16D	N4X242416-F1DS619	12 RU	24	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	101.78
Front		N4X302416-F1DS619	15 RU	30	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	113.16
Front		N4X362416-F1DS619	18 RU	36	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	125.31
Front		N4X422416-F1DS619	22 RU	42	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	137.8
Front		N4X482416-F1DS619	25 RU	48	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	153.24
Front		N4X542416-F1DS619	29 RU	54	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	163.76
Front		N4X602416-F1DS619	32 RU	60	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	175.92
Front		N4X662416-F1DS619	36 RU	66	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	243.68
Front		N4X722416-F1DS619	39 RU	72	24	16	14.5	19" EIA	316SS	14 ga.	Floor Mount	257.33
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	20D	N4X242420-F1DS619	12 RU	24	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	117.59
Front		N4X302420-F1DS619	15 RU	30	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	130.05
Front		N4X362420-F1DS619	18 RU	36	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	143.29
Front		N4X422420-F1DS619	22 RU	42	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	156.86
Front		N4X482420-F1DS619	25 RU	48	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	173.39
Front		N4X542420-F1DS619	29 RU	54	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	185
Front		N4X602420-F1DS619	32 RU	60	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	198.23
Front		N4X662420-F1DS619	36 RU	66	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	273.56
Front		N4X722420-F1DS619	39 RU	72	24	20	18.5	19" EIA	316SS	14 ga.	Floor Mount	288.72
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	24D	N4X242424-F1DS619	12 RU	24	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	136.38
Front		N4X302424-F1DS619	15 RU	30	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	149.92
Front		N4X362424-F1DS619	18 RU	36	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	164.24
Front		N4X422424-F1DS619	22 RU	42	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	178.9
Front		N4X482424-F1DS619	25 RU	48	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	196.51
Front		N4X542424-F1DS619	29 RU	54	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	209.2
Front		N4X602424-F1DS619	32 RU	60	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	223.52
Front		N4X662424-F1DS619	36 RU	66	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	306.4
Front		N4X722424-F1DS619	39 RU	72	24	24	22.5	19" EIA	316SS	14 ga.	Floor Mount	323.09

Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front	30D	N4X242430-F1DS619	12 RU	24	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	160.1
Front		N4X302430-F1DS619	15 RU	30	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	175.27
Front		N4X362430-F1DS619	18 RU	36	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	191.22
Front		N4X422430-F1DS619	22 RU	42	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	207.5
Front		N4X482430-F1DS619	25 RU	48	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	226.73
Front		N4X542430-F1DS619	29 RU	54	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	241.05
Front		N4X602430-F1DS619	32 RU	60	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	257
Front		N4X662430-F1DS619	36 RU	66	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	351.22
Front		N4X722430-F1DS619	39 RU	72	24	30	28.5	19" EIA	316SS	14 ga.	Floor Mount	370.18
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	24D	N4X242424-F2DS619	12 RU	24	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	146.36
Front/Rear		N4X302424-F2DS619	15 RU	30	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	161.25
Front/Rear		N4X362424-F2DS619	18 RU	36	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	176.93
Front/Rear		N4X422424-F2DS619	22 RU	42	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	193.08
Front/Rear		N4X482424-F2DS619	25 RU	48	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	215.34
Front/Rear		N4X542424-F2DS619	29 RU	54	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	229.53
Front/Rear		N4X602424-F2DS619	32 RU	60	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	245.2
Front/Rear		N4X662424-F2DS619	36 RU	66	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	332.75
Front/Rear		N4X722424-F2DS619	39 RU	72	24	24	21	19" EIA	316SS	14 ga.	Floor Mount	351.01
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	30D	N4X242430-F2DS619	12 RU	24	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	170.08
Front/Rear		N4X302430-F2DS619	15 RU	30	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	186.6
Front/Rear		N4X362430-F2DS619	18 RU	36	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	203.9
Front/Rear		N4X422430-F2DS619	22 RU	42	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	221.68
Front/Rear		N4X482430-F2DS619	25 RU	48	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	245.56
Front/Rear		N4X542430-F2DS619	29 RU	54	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	261.38
Front/Rear		N4X602430-F2DS619	32 RU	60	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	278.68
Front/Rear		N4X662430-F2DS619	36 RU	66	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	377.57
Front/Rear		N4X722430-F2DS619	39 RU	72	24	30	27	19" EIA	316SS	14 ga.	Floor Mount	398.11
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	36D	N4X242436-F2DS619	12 RU	24	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	193.8
Front/Rear		N4X302436-F2DS619	15 RU	30	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	211.95
Front/Rear		N4X362436-F2DS619	18 RU	36	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	230.87
Front/Rear		N4X422436-F2DS619	22 RU	42	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	250.28
Front/Rear		N4X482436-F2DS619	25 RU	48	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	275.79
Front/Rear		N4X542436-F2DS619	29 RU	54	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	293.23
Front/Rear		N4X602436-F2DS619	32 RU	60	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	312.15
Front/Rear		N4X662436-F2DS619	36 RU	66	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	422.38
Front/Rear		N4X722436-F2DS619	39 RU	72	24	36	33	19" EIA	316SS	14 ga.	Floor Mount	445.2
Door Access	Encl. Depth	Part Number	Rack U	H	W	D	Max. Span	Rack Type	Material	Matl. Thk.	Mounting	Encl. Weight
Front/Rear	42D	N4X242442-F2DS619	12 RU	24	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	217.52
Front/Rear		N4X302442-F2DS619	15 RU	30	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	237.3
Front/Rear		N4X362442-F2DS619	18 RU	36	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	257.85
Front/Rear		N4X422442-F2DS619	22 RU	42	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	278.88
Front/Rear		N4X482442-F2DS619	25 RU	48	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	306.01
Front/Rear		N4X542442-F2DS619	29 RU	54	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	325.08
Front/Rear		N4X602442-F2DS619	32 RU	60	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	345.63
Front/Rear		N4X662442-F2DS619	36 RU	66	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	467.2
Front/Rear		N4X722442-F2DS619	39 RU	72	24	42	39	19" EIA	316SS	14 ga.	Floor Mount	492.29

19" EIA Server Rack Enclosure

Accessories & Options



19" EIA Stainless Steel Rack Rails

Stainless steel vertical rack rails conform to 19" EIA-310 spacing to support standard rack-mount equipment inside the enclosure.



19" EIA Horizontal Busbar

A horizontal busbar mounts across the top of the rack rail assembly to provide a centralized grounding and bonding point for rack-mounted equipment.




Air Conditioner Hatch Door

A pre-cut hatch panel with integrated mounting frame accommodates a side-mount air conditioning unit without compromising the enclosure's weatherproof seal.



Air Conditioned Unit

A side-mount air conditioning unit maintains stable internal temperatures in high-heat or direct-sun installations.




Barrier Insulation

Interior insulation panels line the back wall and door to reduce heat transfer and condensation risk in outdoor and temperature-variable environments.



Contact Door Switch

A door-mounted contact switch detects open or closed status to trigger alarms, lighting, or remote monitoring systems when the enclosure is accessed.



Door Stopper / Ground Strap

Holds the door open at a fixed angle during servicing while maintaining a continuous ground path between the door and cabinet body.




Filtered Fans

A filtered fan assembly provides positive-pressure ventilation, drawing outside air through replaceable filter fan to cool internal components while blocking dust and debris.



Floor Mounting Kit

A steel base and anchor kit secures the enclosure to a concrete pad or raised floor with pre-drilled anchor points and leveling provisions.



Gasketed Cover / Gland Plate

A gasketed gland plate seals cable entry points at the enclosure floor while maintaining ingress protection rating across multiple conduit or cable pass-throughs.



Key Lockable Handle

A key-lockable handle restricts enclosure access to authorized personnel, available in keyed-alike or keyed-different configurations.



NEMA 4/4X Clamps and Lockable Hasp

Draw-action clamps distribute clamping force evenly around the door perimeter to maintain a watertight seal, with a lockable hasp for padlock compatibility.



Print Pocket

A door-mounted document pocket keeps wiring diagrams, equipment specs, or maintenance records accessible inside the enclosure for field reference.



Quad Outlet Box

A floor-mounted four-outlet power box provides convenient AC power distribution to rack-mounted equipment without external hardware.



Removable Lifting Pads

Threaded lifting eye bolts install into the enclosure top for rigging and crane lifts, then remove cleanly after installation to restore the flat-top profile.



Sunshield Cover

An extended metal canopy mounts over the enclosure top to shade the cabinet from direct solar load, reducing internal temperature rise in outdoor installations.



Window Glass Door (Non-UL Option)

A tempered glass window panel allows visual inspection of rack-mounted equipment status without opening the enclosure; not available on UL Listed configurations.